



EMOS®

A brand of legrand®

Product Catalogue 2024/2025















PERSON and PRODUCT

„The product is a mirror of our needs and our desire to make life easier.“

EMOS®

A brand of legrand®



Making life easy



Specialist in small household electronics! We enjoy developing, sourcing, and delivering electrical products that help our business partners succeed in today's highly competitive marketplace with their optimum price and quality.

For over 30 years, EMOS companies have offered small household electrical products that are part of everyone's life. Under the EMOS brand, there are mainly batteries, light sources, luminaires for domestic and industrial use, extension leads, flashlights, antennas and small electronic devices – multimeters, testers and bells. In five countries, there are over 450 people employed to ensure that our products are of the best quality and get delivered to you, our customers, as quickly as possible. Since 2022, we have become part of the prestigious multinational Legrand Group, providing us with further opportunities to innovate and improve our service to you.

GP

Direct distributor for the Czech Republic, Slovakia, Hungary, Slovenia and Croatia.

www.emos.eu

EMOS basic philosophy

OPTIMAL PRICE/ QUALITY RATIO OF PRODUCTS

Each product is subject to strict quality control by a team of inspection staff directly at the manufacturer's site and our laboratory. We carry out nearly 1,100 tests a year, supervised by 25 specialists.

24-HOUR STOCK AVAILABILITY

We offer excellent stock availability of our products and fast delivery to our customers. A total storage area of over 16,000 m^2 allows us to keep more than 95% of the items in our range in stock and in sufficient inventory.

SPEED AND EASE OF COMMUNICATION

Customers communicate with us in the way that suits them best - through sales representatives, online B2B and B2C portals or by phone. 90 EMOS Group sales representatives visit an average of 650 customers per day

About the multinational Legrand Group

Legrand is a global electrical and digital infrastructure specialist, offering high-value-added products and solutions that improve lives by transforming the spaces where people live, work, and meet. The Legrand Group employs more than 38,200 people in nearly 90 countries and works to improve buildings' electrical and digital infrastructures, helping to digitize them and reduce their carbon footprint. Legrand has solutions for all building types - residential buildings, data centers, other non-residential buildings, industrial spaces, and infrastructures. The Group's technological expertise, leadership position, the breadth and diversity of its offerings, its international presence, and the strength of its brands combine to make Legrand a global leader.

#LegrandImprovingLives

www.legrandgroup.com

@legrand

EMOS dealership



CZECH REPUBLIC

Headquarters and logistics centre
EMOS spol. s r.o.
Lipnická 2844
750 02 Přerov

ID No.: 19014104
tax ID No.: CZ19014104
bank account number: 296149-831/0100
e-mail: emos@emos.cz

contact person: +420 581 261 111
customer centre B2B: +420 581 261 270
customer centre B2C: +420 581 261 233
reception fax: +420 581 277 548
sales fax: +420 581 701 332

warehouse: +420 581 261 160 / 290 / 293
complaints: +420 581 261 281
GPS: 49.467587°N, 17.448671°E

Office Prague
EMOS spol. s r.o.
PB Park, Průmyslová 1306/7
102 00 Praha 10 – Hostivař

SLOVAK REPUBLIC

EMOS SK s.r.o.
Hlinická 409/22
014 01 Bytča

ID No.: 36392961
VAT No.: SK2020104834
e-mail: info@emos.sk

Sales department: +421 41 50 916 14
+421 902 96 69 96
Secretariat:: +421 41 509 16 11

POLAND

EMOS PL Sp. z o.o.
ul. Gałczyńskiego 6
43-300 Bielsko-Biała

tel.: +48 33 816 92 42
e-mail: biuro@emos.pl

SLOVENIA

EMOS SI, d.o.o.
Rimska cesta 92
3311 Šempeter v Savinjski dolini

tel.: +386 8 205 17 20
e-mail: narocila@emos-si.si

Croatia | Bosnia and Herzegovina | Serbia | Montenegro | North Macedonia
Sašo Marinšek
Managing Director EMOS SI, d.o.o.
GSM:+386 31 517 364
e-mail: saso.marinsek@emos-si.si

HUNGARY

EMOS HU Kft.
Budaörs Office Park, A épület
2040 Budaörs, Szabadság út 117

tel.: + 36 70 398 5891
fax: +36 23 41 42 99
e-mail: info@emos.hu

EMOS Group
markets served

Albania | Belgium | Bosnia and Herzegovina | Bulgaria | Montenegro | Denmark | Estonia | Finland | France | Croatia | Italy | Latvia | Lithuania | Cyprus | Hungary | Moldova | Germany | Netherlands | Poland | Portugal | Austria | Romania | Greece | North Macedonia | Slovakia | Slovenia | Serbia | Spain | Sweden | Ukraine

EXPORT

Export departement + Germany | Austria | Sweden
Ladislav Novak
Export Manager

phone: +420 581 261 207
GSM: +420 724 597 640
e-mail: ladislav.novak@emos.cz

Latvia | Estonia | Lithuania | Finland
Raman Sinevich
Country Manager
Baltic countries

GSM: +371 295 901 79
e-mail: raman.sinevich@legrand-ext.com

Spain | Portugal | France | Greece | Netherlands | Italy | Denmark | Belgium
Jose Henriquez
Export Sales Manager

Phone: +420 581 261 127
GSM: +420 602 551 726
e-mail: jose-luis.henriquez@emos.cz

Romania | Bulgaria | Republic of Moldova | Albania
Cseh Szabolcs
Country Manager
Baltic countries

GSM: +40 745 536 783
e-mail: szabolcs.cseh@legrand-ext.com



The Eurologistics Centre of EMOS Holding, with an area of over 16,000 m², supports EMOS' strategy to offer its business partners excellent stock availability of products from its range.

EMOS GoSmart



Smart living is even more accessible

Create your own smart home with EMOS GoSmart and other TUYA-compatible smart devices. Connect individual products, set up automation for their activities and control them remotely with a fully localized and intuitive mobile app.



HOME SECURITY

- Indoor IP cameras
- Outdoor IP cameras
- Video door phones
- Video doorbells
- Sensors
- Access control systems

MEASUREMENT AND CONTROL

- Thermostats
- Weather stations and Thermometers
- Regulating Valves
- Air Quality

WIRING AND CONTROL

- Scenic switches
- Smart hubs
- Extension cords
- Sockets
- Modules

LUMINAIRES AND LIGHT SOURCES

- Bulbs
- Strips
- Luminaires
- Christmas lighting
- Floodlights
- Garden lighting
- Ambient lighting

HOME AND GARDEN

- Scales
- Feeders
- Irrigation Systems

EMOS GoSmart












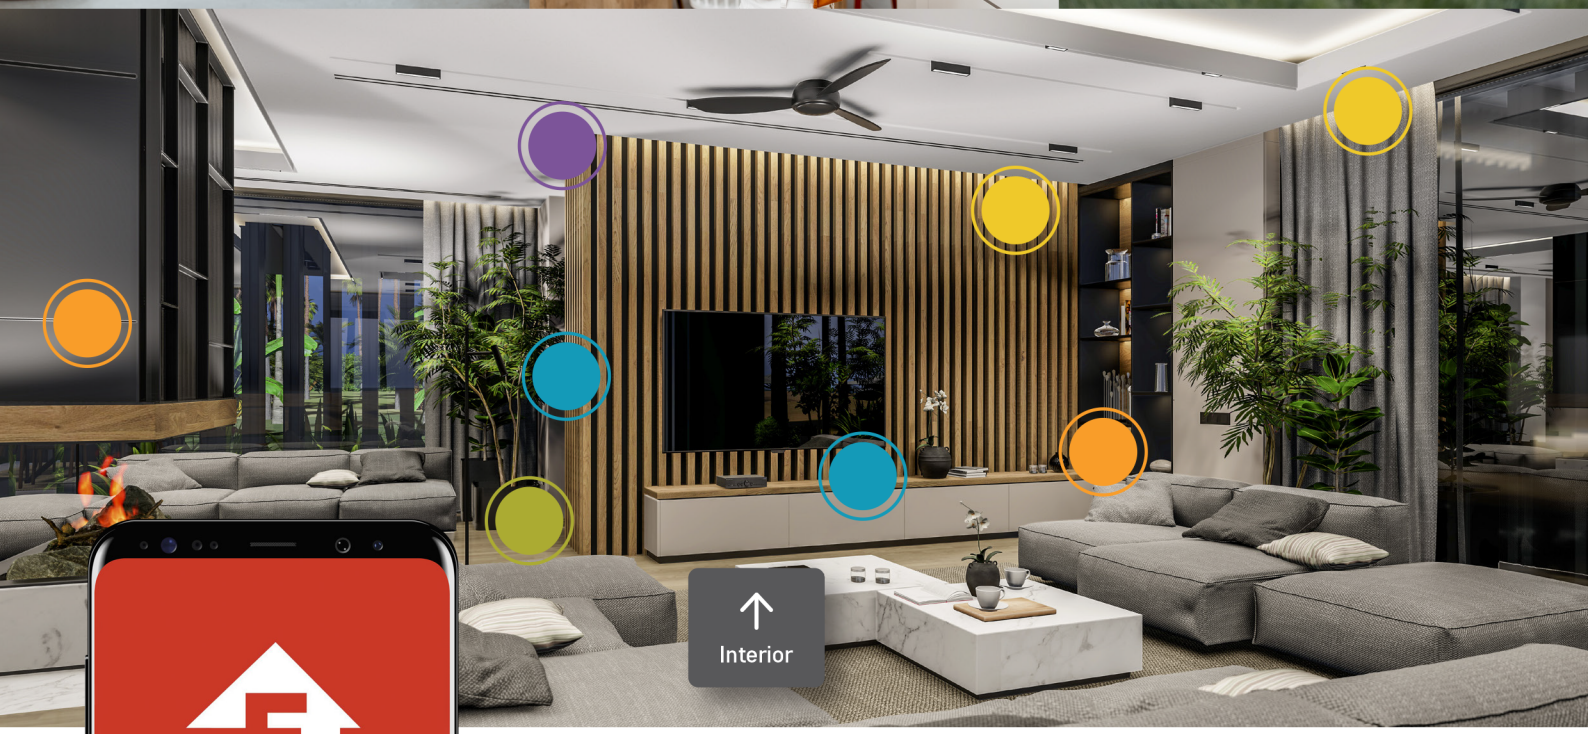



EMOS GoSmart is here to make your life more pleasant, safer, and comfortable.



www.emosgosmart.eu

EMOS GoSmart products

Optimal price/quality ratio

With the affordable prices and excellent quality of EMOS GoSmart products, the smart home system becomes accessible to everyone. You can easily create your smart home without complicated renovation and equipment installation.



WIDE RANGE OF PRODUCTS

Dozens of EMOS GoSmart products are developed by the world's leading manufacturers.

OPTIMAL PRICE AND QUALITY

EMOS GoSmart products are subject to quality control directly at the manufacturer's and in our laboratory.

THE ONLY MOBILE APP

The EMOS GoSmart app allows you to control your device via your mobile phone from anywhere.

TECHNICAL SUPPORT

We provide technical support and help to get EMOS GoSmart products up and running.

COMPATIBILITY AND EXPANDABILITY

Expand your smart home with EMOS GoSmart products and thousands of other TUYA compatible products.

Advanced technology

EMOS GoSmart products communicate via Wi-Fi network, Bluetooth, or ZigBee communication protocols. You can even use voice control thanks to their compatibility with Amazon Alexa and Google Assistant.

Wi Fi · ZigBee 3.0 · BLE · Works with Amazon Alexa Google Assistant




Powered by

Data security and compatibility

EMOS GoSmart priorities

The basis of the EMOS GoSmart system is the global TUYA platform. This platform meets the most demanding security requirements and, using encrypted communication, allows you to connect the devices in your smart home, keeping them compatible and easy to use.

Renowned brands that have chosen **the TUYA platform for their smart devices include HAMA, LIDL, LEDVANCE, PHILIPS, and many others.**

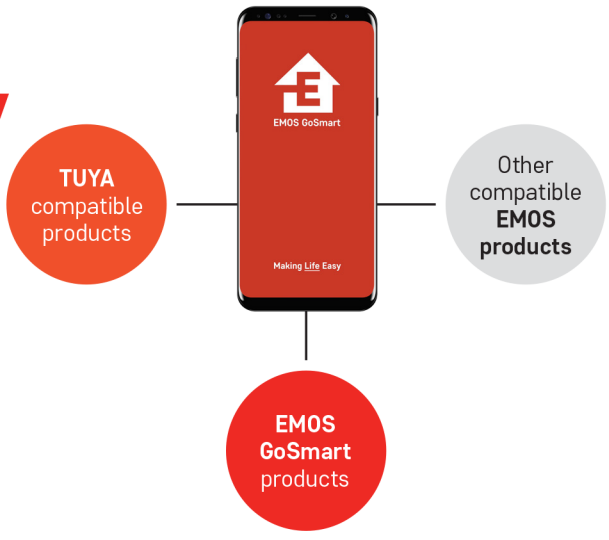

EMOS GoSmart app

Full localization and ease of use

The EMOS GoSmart app makes it easy to control all your smart home devices via your **Android** or **iOS** mobile phone or tablet. The perfect localization allows you to communicate with the app in your native language.

Download on the App Store


GET IT ON Google Play




Control multiple devices



Never miss a visit




Create and use smart scenarios



Connect from anywhere



Share with your family with one tap



Without complicated settings, you can keep track of any activities in your home with the **EMOS GoSmart** app and control conveniently all your devices remotely.

FULL LOCALIZATION

Full localization allows you to communicate with the app in your native language.

EASY TO USE

You don't have to worry about complicated app controls. Anyone can handle it.

SMART SCENARIOS

Have your products work together using the smart scenarios.

DEVICE MANAGEMENT

All your smart home devices can be controlled from anywhere using the app.

SMART NOTIFICATIONS

The app sends you notifications about any activity in your home.

EMOS GoSmart is here to make your life more pleasant, safer, and comfortable.

GoSmart 13
Home Security 13
Indoor IP cameras 13
Outdoor IP cameras 14
Video door phones 15
Video doorbells 16
Entry code keypads 17
Sensors 17
Luminaires and Light Sources 19
Bulbs 19
Luminaires 21
Christmas Lighting 22
Wiring and Control 23
Scenic switches 23
Zigbee gateways 24
Sockets 25
Modules 26
Measurement and Control 29
Thermostats 29
Weather stations and Thermometers 30
Air quality 31
Control valves 31
Household and Garden 32
Bathroom Scales 32
Batteries 33
GP Batteries 33
GP Consumer batteries 33
GP Alkaline 33
GP Ultra Plus 33
GP Ultra 35
GP Super 38
GP Carbon Zinc 42
GP Greencell 42
GP Supercell 45
GP Other batteries 46
GP Lithium cylindrical 46
GP Lithium button 48
GP Special alkaline 54
GP Alkaline button 56
GP Silver oxide 58
GP Zinc air 60
GP Rechargeable 61
GP ReCyko Pro 61
GP ReCyko 62
Raver Batteries 66
Raver Lithium cylindrical 66
Raver Alkaline 67
Raver Ultra 67
Raver Batteries 68
Raver Rechargeable 68
Raver Other batteries 69
Raver Lithium button 69
Batteries EMOS, lead acid battery 70
Lead acid batteries 70
Battery chargers, powerbanks, USB chargers 73
Battery chargers 73
Charge 10 73
GP Battery chargers 74
EMOS Battery chargers 76
Powerbanks 77
GP Powerbanks 77
EMOS Powerbanks 79
USB chargers 80
Universal adaptors 81
Car battery chargers, testers 82
Portable Lighting 84
GP 84
Flashlights 84
GP Discovery 84
GP Everyday 86
Headlights 87
GP Xplor 87
GP Discovery 88
EMOS 90
LED Metal Flashlights 90
ULTIBRIGHT Flashlights 90
EMOS Flashlights 91
EMOS 93
LED Plastic Flashlights 93
LED Headlights 95
LED Work Lights 98
LED Rechargeable Work Lights 98
LED Work Lights 101
LED Work Lights – 230 V 102
EMOS 103
LED Rechargeable flashlights EXPERT 103
LED Bike Lights 104
LED Night Lights 105
LED Battery Night Lights 105
LED 230 V Night Lights 106
EMOS 108
LED Flashlights display box 108
LED Keychains display box 111
Insect killer 112
Spare parts 112
Lighting 113
Light sources 113
LED bulbs 113
Filament 113
Classic 124
Basic 142
GoSmart Bulbs 147
Light sources 149
Light bulbs for electrical appliances 149
ECO halogen 150
LED tubes, tubes 151
PROFI PLUS 151
BASIC 153
Luminaires 154
Highbays 154
PROFI PLUS 154
ASTER 154
PROFI 157
CORUS 157
Highbays 158
Accesories 158
Dustproofs 159
PROFI PLUS 159
MISTY 159
PROFI 161
FESTY 161
ESSENTIAL 162
DUSTY 162
Street Lights 163
PROFI 163
SOLIS 163
Floodlights 164
PROFI PLUS 164
AVENO 164
PROFI 167
INOVO 167
CLASSIC 170
ILIO 170
TAMBO 172
ESSENTIAL 174
SIMPO 174
Floodlights 176
Accessories 176
Work Lights 177
PROFI 177

CANNO 177
CLASSIC 178
ILIO 178
HOBBY SLIM 179
ACCO 179
Linear Luminaires 180
PROFI PLUS 180
ORTO 180
LED Panels 182
PROFI PLUS 182
PROXO 182
PIXXO 184
LEXXO 184
TROXO 185
VEXXO 186
EXCLUSIVE 187
RIVI 187
PROFI 188
MAXXO 188
REXXO 189
ESSENTIAL 190
DAXXO 190
LED Panels 191
Accessories 191
Luminaires 192
Drivers 192
Surface Luminaires 193
EXCLUSIVE 193
RIVI 193
ALVI 194
ILVI 195
LIVI 195
ILVI GoSmart 196
PROFI 197
NEXXO 197
TIVI 203
DIONI 204
CLASSIC 206
TORI 206
CORI 208
DORI 209
ZURI 210
QARI 211
RORI 212
ESSENTIAL 213
RUBIC 213
FIONI 214
FLORI 215
Surface Luminaires 217
Others 217
Pendant Luminaires 218
CLASSIC 218
Recessed Luminaires 219
EXCLUSIVE 219
SIMMI 219
PROFI 220
NEXXO 220
VIXXO 226
GERI 228
ESSENTIAL 229
RUBIC 229
Emergency Luminaires 231
PROFI 231
CESSI 231
NESSI 232
ORSU 233
Emergency Luminaires 234
Emergency conversion kit 234
Orientation Luminaires 235
CLASSIC 235
AMAL 235
DIRAL 236
DIRBI 237
Cabinet Luminaires 238
CLASSIC 238
TIGO 238
Luminaires 239
Desk and Floor Lamps 239
Sensors 245
Decorations 247
Smart chains 247
Chains GoSmart 247
Decorations 249
Party 249
Lantern 250
LED candles 250
Weather stations, thermometers, scales, others 252
Weather stations 252
Weather stations 252
Thermometers 255
Thermometers 255
Thermometers GoSmart 258
Spare sensors 258
Kitchen, hanging scales 260
Kitchen timers 262
Personal scales 263
Air quality monitor 264
Bathroom scales GoSmart 264
TV and audio accessories 265
Multimedia players, radios 265
TV wall mounts 265
Universal remote controllers OFA 267
Power supply extension cords, cable reels, plugs, accessories 270
Power supply extension cords and sockets 270
FRENCH 270
Single socket extension cords 270
Two-cores PVC 270
SCHUKO 271
MOES Extension cords 271
1-phase 16A with rubber insulation 271
1-phase 16A with PVC insulation 272
Single socket extension cords 278
1-phase 16A with rubber insulation 278
1-phase 16A with PVC weatherproof insulation 279
1-phase 16A with PVC insulation 280
SCHUKO 281
MOES 281
Surge protectors 282
Surge protectors EMOS SCHUKO 282
Assembled cords 283
3-phase rubber 283
Cable reels 284
SCHUKO 284
3-phase rubber 284
1-phase weatherproof PVC 285
1-phase rubber 286
1-phase PVC 288
Sockets, plugs, adaptors, timers, others 290
Holders 290
Plugs, sockets 291
Adaptors 292
Travel adaptors 293
Timers 293
Energy consumption meters 295
GoSmart sockets 295
Industrial plugs, 380 V sockets 296
Flexo, assembled cords 298
Rubber 298
Two-cores 298
Three-cores 299

PVC 301
Two-cores 301
Three-cores 302
Cables 305
Data cables UTP, FTP 305
Data cables CAT 5E 305
Data cables CAT 6 308
Connectors, patch accessories 309
Connection patch cables, accessories 309
Connectors IEC, F, reductions 312
Twin-shielded cables CYH 315
Coaxial cables 320
Coaxial cables 50 Ohm 320
Coaxial cables 75 Ohm 320
Connection AV cables 326
AV cables blister 326
AV cables polybag 327
AV cables hanger 327
AV cables paper blister 328
Smartphone cables 331
Solid, flexible cables 335
Solid cables CYKY-J 335
Flexible cables PVC CYSY 335
Solar cables 336
HF signal receiving components, antennas, small electronic, accessories 337
Antennas 337
CITY 337
VILLAGE 339
PROFI 340
TV signal receivers 342
TV signal receivers 342
Accessories 342
Wall sockets 343
Accessories 345
Combiners, splitters 345
Amplifiers, preamplifiers, LTE filters 346
Power supply units for antennas 348
Holders for satellite, terrestrial antennas 349
ZigBee GoSmart 350
Videophones, doorbells 351
Home videophones, sets 351
Home videophones 351
Videophones and video doorbells GoSmart 354
Accessories for videophones 355
Cameras, Surveillance 356
GoSmart Cameras 356
Doorbells 358
Wireless doorbells 358
Spare push buttons 362
Wired doorbells 364
Sensors GoSmart 365
Multimeters, testers 366
Multimeters, measuring cables 366
Testers 369
Measuring instruments 371
Thermostats, CO and smoke alarms 372
Thermostats 372
Thermostats EMOS 372
Thermostats GoSmart 376
CO and smoke alarms 377
Valve closer GoSmart 378
Detectors GoSmart 379
Installation material, tapes 380
Installation material 380
Sockets, switches 380
EMOS 380
IP20 380
IP54/IP44 383
Scene switches GoSmart 384
Modules GoSmart 386
Installation material 388
Terminal blocks 388
Installation material others 389
Transformer solders, copper, rosin 390
Tapes 391
Electroinsulating PVC tapes 391
Other tapes 395

EMOS
A brand of legrand

www.emos.eu | Order Code Item Number | Packaging Type

GoSmart



Home Security

Indoor IP cameras

EMOS GoSmart

- For keeping people safe and protecting the interiors of homes
- Alerts of unusual activity sent to mobile devices
- Continuous tracking of moving person for better recording quality
- Two-way voice communication
- Automatic video and audio recording when motion is detected
- Connection to home network via WIFI protocol
- Compatibility with EMOS GoSmart products and TUYA devices
- Voice control with Google Assistant and Amazon Alexa

Powered by

Works with Amazon Alexa Google Assistant

Download on the App Store | GET IT ON Google Play

- automatic image saving
- setting the detection area
- night vision
- camera viewing angle: 100°
- IP rating: IP20
- camera resolution: 1 920 × 1 080
- motion detection
- sound detection
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife

- protocol: Wi-Fi
- transmission frequency: 2.4 GHz WIFI
- voice communication: two-way
- motion tracking
- motorised rotation
- motion detection angle: 100°
- motion detection range: 10 meters





Wi Fi | FULL HD Resolution 1 080p | Night vision | Pan and tilt | 100° | Motion detection | Motion tracking | Sound detection | 2 way audio | Micro SD max. 128 Gb

8 592920 118191

H4051	1/-/-/12
30 24 040 510	IP-100 CUBE

- automatic image saving
- setting the detection area
- night vision
- camera viewing angle: 100°
- IP rating: IP20
- camera resolution: 2 304 × 1 296
- motion detection
- sound detection
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife

- protocol: Wi-Fi
- transmission frequency: 2.4 GHz WIFI
- voice communication: two-way
- motion tracking
- motorised rotation
- motion detection angle: 100°
- motion detection range: 10 meters
- human body recognition





Wi Fi | 2K QUAD HD Resolution 3MP | Night vision | Pan and tilt | 100° | Motion detection | Cry alert | Lullaby | 2 way audio | Night light

8 592920 118146

H4052	1/-/-/6
30 24 040 520	IP-500 GUARD

- automatic image saving
- setting the detection area
- night vision
- camera viewing angle: 100°
- IP rating: IP20
- camera resolution: 2 304 × 1 296
- motion detection
- sound detection
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi
- transmission frequency: 2.4 GHz WIFI
- voice communication: two-way
- motion tracking
- motorised rotation
- motion detection angle: 100°
- motion detection range: 10 meters





Wi Fi | 3MPx Resolution | Night vision | Pan and tilt | 100° | Motion detection | Motion tracking | Sound detection | 2 way audio | Micro SD max. 128 Gb | 8 592920 128992

H4061 30 24 040 610 | 1/-/-/12 IP-110 CUBEV2

Outdoor IP cameras

EMOS GoSmart

- Surveillance of exteriors of commercial and private buildings
- Alerts of unusual activity sent to mobile devices
- High weather resistance - IP65
- Two-way voice communication to deter intruders
- Automatic video and audio recording when motion is detected
- Connection to home network via WIFI protocol
- Compatible with EMOS GoSmart products and TUYA devices
- Voice control with Google Assistant and Amazon Alexa

Powered by tuya | Works with Amazon Alexa Google Assistant | Download on the App Store | GET IT ON Google Play

- automatic image saving
- night vision
- camera viewing angle: 110°
- IP rating: IP55
- camera resolution: 1 920 × 1 080
- motion detection
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi
- transmission frequency: 2.4 GHz WIFI
- voice communication: two-way
- motion detection angle: 120°
- motion detection range: 10 meters
- human body recognition





Wi Fi | Rechargeable 8 800 mAh | FULL HD Resolution 1 080p | Night vision | 110° | Motion detection | 2 way audio | Solar charging | Siren 105 dB | IP55 | 8 592920 117743

H4056 30 24 040 560 | 1/-/-/5 IP-600 EYE

- automatic image saving
- setting the detection area
- night vision
- camera viewing angle: 110°
- IP rating: IP65
- camera resolution: 2 616 × 1 958
- motion detection
- sound detection
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi
- transmission frequency: 2.4 GHz WIFI
- voice communication: two-way
- motion tracking
- motorised rotation
- motion detection angle: 110°
- motion detection range: 10 meters
- human body recognition





Wi Fi | 5MPx Resolution | Color Night vision | Pan and tilt | 110° | Motion detection | Human detection | Motion tracking | Sound detection | 2 way audio | 8 592920 128909

H4057 30 24 040 570 | 1/-/-/4 IP-800 WASP

- automatic image saving
- setting the detection area
- night vision: yes, 4× IR LED + white LED
- camera viewing angle: 105°
- IP rating: IP65
- camera resolution: 2 048 × 1 536
- motion detection
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: 4G, LTE
- transmission frequency: LTE
- voice communication: two-way
- motorised rotation
- motion detection angle: 120°
- motion detection range: 10 meters
- human body recognition





4G+Lte | Rechargeable 10 400 mAh | 3MPx Resolution | Color Night vision | Pan, tilt and zoom | Motion detection | Human detection | 2 way audio | Solar charging | IP65 | 8 592920 128923

H4058 30 24 040 580 | 1/-/-/4 IP-6000 OWL

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- automatic image saving
- setting the detection area
- night vision: yes, 9× IR LED 850 nm
- camera viewing angle: 130°
- IP rating: IP65
- camera resolution: 2 592 × 1 944
- motion detection
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi

- transmission frequency: 2.4 GHz WIFI
- voice communication: two-way
- motion detection angle: 120°
- motion detection range: 9 metres
- human body recognition





Wi Fi | 5MPx Resolution | Night vision | 130° | Motion detection | Human detection | 2 way audio | Magnetic holder | PIR 120° 9 m | IP65

8 592920 129012

H4063 | 1/-/-/14

30 24 040 630 | IP-210 SNAPV2

- automatic image saving
- setting the detection area
- night vision: yes, 4× IR LED + white LED
- camera viewing angle: 130°
- IP rating: IP65
- camera resolution: 2 304 × 1 296
- motion detection
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi

- transmission frequency: 2.4 GHz WIFI
- voice communication: two-way
- motion tracking
- motorised rotation
- motion detection angle: 120°
- motion detection range: 10 meters





Wi Fi | 3MPx Resolution | Night vision | Pan | 130° | Motion detection | Motion tracking | 2 way audio | 200–1 200 lm | Siren 120 dB

8 592920 129036

H4064 | 1/-/-/4

30 24 040 640 | IP-310 TORCHV2 WHITE

- automatic image saving
- setting the detection area
- night vision: yes, 4× IR LED + white LED
- camera viewing angle: 130°
- IP rating: IP65
- camera resolution: 2 304 × 1 296
- motion detection
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi

- transmission frequency: 2.4 GHz WIFI
- voice communication: two-way
- motion tracking
- motorised rotation
- motion detection angle: 120°
- motion detection range: 10 meters
- human body recognition





Wi Fi | 3MPx Resolution | Night vision | Pan | 130° | Motion detection | Motion tracking | 2 way audio | 200–1 200 lm | Siren 120 dB

8 592920 129050

H4065 | 1/-/-/4

30 24 040 650 | IP-310 TORCHV2 BLACK

Video door phones

EMOS GoSmart

- Perfect access control for commercial and private properties
- Unusual activity alerts sent to mobile devices
- Two-way communication with the visitor without opening the door
- Automatic video and audio recording when motion is detected
- Night vision for perfect images in all lighting conditions
- With accessories, the ability to secure multiple homes at once
- Compatible with EMOS GoSmart products and TUYA devices

Powered by

Download on the App Store | GET IT ON Google Play

- product: doorphone set with WiFi
- screen size: 7"
- possibility to record
- lock control
- gate control
- intercom
- power supply for the screen: 12 V DC (included)
- optional connection of CCTV camera
- monitor size: 175 × 118 × 25 mm

- dimensions of the camera unit: 142 × 44 × 21 mm
- camera viewing angle: 160°
- packaging: 1 pc, box
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife,
- protocol: Wi-fi
- connectivity: 2.4 GHz WIFI
- voice communication: two-way





Wi Fi | FULL HD Resolution 1 080p | Night vision | 160° | Door/Gate control | 2 way audio | IR CUT Day/Night | Motion detection | Video guard | Touch screen

8 592920 129678

H4020 | 1/-/-/4

30 10 040 200 | IP-750A

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- product: video phone
- screen size: 7
- lock and gate control
- intercom
- power supply for the monitor: 12 V DC (included)
- recommended camera unit: H3016, H3017, H3018,
- monitor size: 145 × 205 × 12 mm
- packaging: 1 pc, box





Wi Fi | FULL HD Resolution 1 080p | Night vision | Door/Gate control | 2 way audio | Touch screen | Monitor intercom | Micro SD max. 128 Gb | Cloud storage

8 592920 129692

H4021 | 1/-/-/6

30 10 040 210 | IP-750B

Video doorbells

EMOS GoSmart

- Perfect access control for commercial and private properties
- Unusual activity alerts sent to mobile devices
- Two-way communication with the visitor without opening the door
- Automatic video and audio recording when motion is detected
- Night vision for perfect images in all lighting conditions
- Different power supply options for rooms w/o cable distribution
- Compatibility with EMOS GoSmart products and TUYA devices
- Voice control with Google Assistant and Amazon Alexa

Powered by tuya

Works with Amazon Alexa Google Assistant

Download on the App Store | GET IT ON Google Play

- lock control
- additional indoor bell
- camera viewing angle: 110°
- camera resolution: 1 920 × 1 080
- motion detection
- IR CUT
- siren
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi
- transmission frequency: 2.4 GHz WIFI
- SD card storage
- cloud storage
- anti-theft protection
- control by voice assistants
- voice communication: two-way
- notifications to the mobile app
- WebRTC function





Wi Fi | Rechargeable 4 000 mAh | FULL HD Resolution 1 080p | Night vision | 110° | 2 way audio | IR CUT Day/Night | Siren 85 dB | Door control | Solar charging

8 592920 117545

H4030 | 1/-/-/8

30 10 040 300 | IP-09D DC

- lock control
- additional indoor bell
- camera viewing angle: 110°
- camera resolution: 1 920 × 1 080
- motion detection
- IR CUT
- siren
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi
- transmission frequency: 2.4 GHz WIFI
- SD card storage
- cloud storage
- anti-theft protection
- control by voice assistants
- voice communication: two-way
- notifications to the mobile app
- WebRTC function





Wi Fi | FULL HD Resolution 1 080p | Night vision | 110° | Motion detection | 2 way audio | IR CUT Day/Night | Siren 85 dB | Door control | PIR sensor

8 592920 117569

H4031 | 1/-/-/12

30 10 040 310 | IP-09C

- additional indoor bell
- camera viewing angle: 130°
- camera resolution: 1 920 × 1 080
- motion detection
- IR CUT
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi
- transmission frequency: 2.4 GHz WIFI
- SD card storage
- cloud storage
- anti-theft protection
- control by voice assistants
- voice communication: two-way
- notifications to the mobile app
- WebRTC function





Wi Fi | Rechargeable 6 700 mAh | FULL HD Resolution 1 080p | Night vision | 130° | Human detection | Motion detection | 2 way audio | IR CUT Day/Night | IP65

8 592920 118177

H4032 | 1/-/-/10

30 10 040 320 | IP-15S

Entry code keypads

EMOS GoSmart

- High quality and robust keyboard finish that prevents intentional damage and ensures long life.
- Remote unlocking via APP
- Input logging function for easy attendance management
- Individual member management (each member can have their own unique code or RFID chip)
- Compatibility with EMOS GoSmart products and TUYA devices
- Voice control with Google Assistant and Amazon Alexa

Powered by tuya

Works with Amazon Alexa Google Assistant

Download on the App Store | GET IT ON Google Play

- product: keyboard RFID, TUYA
- number of switching relays: 1
- number of codes: up to 1 000
- power source: 12 V AC/DC (not included)
- dimensions: 23 × 78 × 115 mm
- packaging: 1 pc, box
- frequency: 125 kHz
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi
- transmission frequency: 2.4 GHz Wi-Fi
- cloud storage





Wi Fi | EMOS GoSmart | IP68 | Antivandal body | Remote unlock | Attendance log | Open/close log | Password unlock | Bell button | 12 V DC

8 592920 128862

H5023	1/-/-/18
30 69 050 230	IP-006AX

Sensors

EMOS GoSmart

- Sensors to secure your home
- Immediate notification of an unusual situation via the app
- Optical and audible signalling
- Sensors that detect motion, water/gas leaks, fire, etc.
- Connect to your home network via Wi-Fi/ZigBee protocol
- Compatibility with EMOS GoSmart products and TUYA devices
- Voice control with Google Assistant and Amazon Alexa

Powered by tuya

Works with Amazon Alexa Google Assistant

Download on the App Store | GET IT ON Google Play

- detection type: smoke detector
- type of installation: possible to mount on the wall o
- type of signaling: optical and audible
- transmission frequency: 2.4 GHz Wi-Fi
- operating temperature: 0 °C to 40 °C
- operating humidity: 0–93 %
- lifetime: 10 years
- IP rating: IP20
- power source: 2× 1.5 V AA, included
- packaging: 1 pc, small box
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife,
- protocol: Wi-Fi
- notifications to the mobile app
- aplication languages: EN, CZ, SK, PL, DE, HU, SI, FR,





Wi Fi | Real time alert | 10 YEARS Product lifetime | End of life warning | Low battery warning | 85 dB | 2× 1.5 V AA included

8 592920 122143

P56500S	1/-/-/16
21 04 103 000	P56500S

- detection type: water leak detector
- type of installation: free-standing
- type of signaling: optical and audible
- memory of alarms
- transmission frequency: Zigbee 3.0
- operating temperature: 5 °C to 38 °C
- operating humidity: ≤80 % without condensation
- lifetime: 10 years
- IP rating: IP65
- power source: 1× 3 V CR2, included
- packaging: 1 pc, small box
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife,
- protocol: Zigbee 3.0
- notifications to the mobile app
- aplication languages: EN, CZ, SK, PL, DE, HU, SI, FR,





ZigBee 3.0 | Real time alert | 10 YEARS Product lifetime | End of life warning | Low battery warning | 85 dB | 1× 3 V CR2 included

8 592920 122136

P56000S	1/-/-/48
21 04 104 000	P56000S

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- detection type: detector CO
- type of installation: possible to mount on the wall o
- type of signaling: optical and audible
- memory of alarms
- transmission frequency: 2.4 GHz Wi-Fi
- operating temperature: -10 °C to 40 °C
- operating humidity: 15–93 %
- lifetime: 10 years
- IP rating: IP30
- power source: 2× 1.5 V AA, included
- packaging: 1 pc, small box
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife,
- protocol: Wi-Fi
- notifications to the mobile app
- aplication languages: EN, CZ, SK, PL, DE, HU, SI, FR,





Wi Fi | Real time alert | 10 YEARS Product lifetime | End of life warning | Low battery warning | 85 dB | 2× 1.5 V AA included

8 592920 130780

P56400S | 1/-/-/20

21 04 105 000 | TCS0101W

- product: motion sensor
- detection angle: 90°
- detection distance: 8 m
- IP rating: IP20
- sensor type: PIR
- power source: 1× CR123A (3 V)
- packaging: 1 pc, small box
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Zigbee 3.0
- transmission frequency: 2.4 GHz (2 405–2 480 MHz)
- notifications to the mobile app
- aplication languages: EN, CZ, SK, PL, DE, HU, SI, FR,





ZigBee 3.0 | Motion detection | Motion Log | Magnetic holder | PIR 90° 8 m | 3M TAPE mounting | 1× CR123A

8 592920 128749

H5020 | 1/-/-/40

30 69 052 010 | IP-2210Z

- product: door/window sensor
- IP rating: IP20
- sensor type: magnetic
- power source: 1× CR2032 (3 V)
- packaging: 1 pc, small box
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Zigbee 3.0
- transmission frequency: 2.4 GHz (2 405–2 480 MHz)
- notifications to the mobile app
- aplication languages: EN, CZ, SK, PL, DE, HU, SI, FR,





ZigBee 3.0

8 592920 128732

H5021 | 1/-/-/100

30 69 052 020 | IP-2211Z

Luminaires and Light Sources

Bulbs

EMOS GoSmart

- Remote light on/off
- Brightness, light colour and chromaticity temperature control
- Energy saving with automatic switch-off and dimming options
- Set unique lighting scenes for different activities
- Easy to install and create automations
- Connection to the home network via WIFI protocol
- Compatibility with EMOS GoSmart products and TUYA devices
- Voice control with Google Assistant and Amazon Alexa

Powered by

Works with Amazon Alexa Google Assistant

Download on the App Store

GET IT ON Google Play

- replacement of incandescent bulb: 60 W
- dimmable
- shape: A60
- luminous flux: 806 lm
- color temperature: 2 700–6 500 K
- power: 9 W
- luminous efficacy: 90 lm/W
- energy efficiency class: F
- beam angle: 200°

- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 120 mm
- packaging: 1 pc, small box
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi
- control by voice assistants
- notifications to the mobile app





Wi Fi | E27 | 806 lm | 9 W | DIMMABLE 10 % – 100 % | CCT | RGB

8 592920 120125

ZQW514R	1/-/10/40
15 20 503 500	ZQW514R

- replacement of incandescent bulb: 75 W
- dimmable
- shape: A60
- luminous flux: 1 050 lm
- color temperature: 2 700–6 500 K
- power: 11 W
- luminous efficacy: 95 lm/W
- energy efficiency class: F
- beam angle: 200°

- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 125 mm
- packaging: 1 pc, small box
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi
- control by voice assistants
- notifications to the mobile app





Wi Fi | E27 | 1 050 lm | 11 W | DIMMABLE 10 % – 100 % | CCT | RGB

8 592920 120156

ZQW515R	1/-/10/40
15 20 503 501	ZQW515R

- replacement of incandescent bulb: 94 W
- dimmable
- shape: A65
- luminous flux: 1 400 lm
- color temperature: 2 700–6 500 K
- power: 14 W
- luminous efficacy: 100 lm/W
- energy efficiency class: F
- beam angle: 200°

- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 65 × 65 × 134 mm
- packaging: 1 pc, small box
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi
- control by voice assistants
- notifications to the mobile app





Wi Fi | E27 | 1 400 lm | 14 W | DIMMABLE 10 % – 100 % | CCT | RGB

8 592920 120187

ZQW516R	1/-/10/40
15 20 503 502	ZQW516R

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- replacement of incandescent bulb: 40 W
- dimmable
- shape: Candle
- luminous flux: 470 lm
- color temperature: 2 700–6 500 K
- power: 4.8 W
- luminous efficacy: 98 lm/W
- energy efficiency class: F
- beam angle: 180°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 37 × 37 × 110 mm
- packaging: 1 pc, small box
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi
- control by voice assistants
- notifications to the mobile app





Wi Fi | E14 | 470 lm | 4.8 W | DIMMABLE 10 % – 100 % | CCT | RGB

8 592920 120217

ZQW322R 1/-/10/60

15 25 501 500 ZQW322R

- replacement of incandescent bulb: 35 W
- dimmable
- shape: MR16
- luminous flux: 400 lm
- color temperature: 2 700–6 500 K
- power: 4.8 W
- luminous efficacy: 83 lm/W
- energy efficiency class: G
- beam angle: 120°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 56.5 mm
- packaging: 1 pc, small box
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi
- control by voice assistants
- notifications to the mobile app





Wi Fi | GU10 | 400 lm | 4.8 W | DIMMABLE 10 % – 100 % | CCT | RGB

8 592920 120248

ZQW832R 1/-/10/90

15 25 500 500 ZQW832R

- replacement of incandescent bulb: 60 W
- dimmable
- shape: A60
- luminous flux: 806 lm
- color temperature: 2 700–6 500 K
- power: 9 W
- luminous efficacy: 90 lm/W
- energy efficiency class: F
- beam angle: 200°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 120 mm
- packaging: 1 pc, small box
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Zigbee 3.0
- control by voice assistants
- notifications to the mobile app





ZigBee 3.0 | 806 lm | E27 | 9 W | DIMMABLE 10 % – 100 % | CCT | RGB

8 592920 121078

ZQZ514R 1/-/10/40

15 25 753 500 ZQZ514R

- replacement of incandescent bulb: 75 W
- dimmable
- shape: A60
- luminous flux: 1 050 lm
- color temperature: 2 700–6 500 K
- power: 11 W
- luminous efficacy: 95 lm/W
- energy efficiency class: F
- beam angle: 200°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 125 mm
- packaging: 1 pc, small box
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Zigbee 3.0
- control by voice assistants
- notifications to the mobile app





ZigBee 3.0 | 1 050 lm | E27 | 11 W | DIMMABLE 10 % – 100 % | CCT | RGB

8 592920 121108

ZQZ515R 1/-/10/40

15 25 753 501 ZQZ515R

- replacement of incandescent bulb: 94 W
- dimmable
- shape: A65
- luminous flux: 1 400 lm
- color temperature: 2 700–6 500 K
- power: 14 W
- luminous efficacy: 100 lm/W
- energy efficiency class: F
- beam angle: 200°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 65 × 65 × 134 mm
- packaging: 1 pc, small box
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Zigbee 3.0
- control by voice assistants
- notifications to the mobile app





ZigBee 3.0 | 1 400 lm | E27 | 14 W | DIMMABLE 10 % – 100 % | CCT | RGB

8 592920 121139

ZQZ516R 1/-/10/40

15 25 753 502 ZQZ516R

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- replacement of incandescent bulb: 40 W
- dimmable
- shape: Candle
- luminous flux: 470 lm
- color temperature: 2 700–6 500 K
- power: 4.8 W
- luminous efficacy: 98 lm/W
- energy efficiency class: F
- beam angle: 180°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 37 × 37 × 110 mm
- packaging: 1 pc, small box
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Zigbee 3.0
- control by voice assistants
- notifications to the mobile app





ZigBee 3.0 | 470 lm | E14 | 4.8 W | DIMMABLE 10 % – 100 % | CCT | RGB

8 592920 121160

ZQZ322R 1/-/10/60

15 25 751 500 ZQZ322R

- replacement of incandescent bulb: 35 W
- dimmable
- shape: MR16
- luminous flux: 400 lm
- color temperature: 2 700–6 500 K
- power: 4.8 W
- luminous efficacy: 83 lm/W
- energy efficiency class: G
- beam angle: 120°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 56.5 mm
- packaging: 1 pc, small box
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Zigbee 3.0
- control by voice assistants
- notifications to the mobile app





ZigBee 3.0 | 400 lm | GU10 | 4.8 W | DIMMABLE 10 % – 100 % | CCT | RGB

8 592920 121191

ZQZ832R 1/-/10/90

15 25 750 500 ZQZ832R

Luminaires

EMOS GoSmart

- Control via remote control or mobile app
- Adjustment of light intensity and colour
- Timer and night light function
- Connection to the home network via WIFI protocol
- Compatibility with EMOS GoSmart products and TUYA devices
- Voice control with Google Assistant and Amazon Alexa

Powered by

Works with Amazon Alexa Google Assistant

Download on the App Store

GET IT ON Google Play

- power: 30 W
- replacement of incandescent bulb: 110 W
- luminous flux: 1 800 lm
- color temperature: 2 700–6 500 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 115°
- type of mounting: surface
- dimensions: 400 × 70 mm in diameter
- dimming function
- body colour: white
- line: GoSmart
- warranty period: 3 years
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife,
- protocol: Wi-Fi
- transmission frequency: 2.4 GHz Wi-Fi
- control by voice assistants





Wi Fi | 180–1 800 lm | 30 W | Dimmable 10 %...100 % | CCT Tunable | OFF 30/60 min | CCT | 3 YEARS WARRANTY

8 592920 122570

ZM5191 1/-/-/5

15 39 087 300 ZM5191

- power: 45 W
- replacement of incandescent bulb: 160 W
- luminous flux: 2 700 lm
- color temperature: 2 700–6 500 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 115°
- type of mounting: surface
- dimensions: 500 × 70 mm in diameter
- dimming function
- body colour: white
- line: GoSmart
- warranty period: 3 years
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife,
- protocol: Wi-Fi
- transmission frequency: 2.4 GHz Wi-Fi
- control by voice assistants





Wi Fi | 270–2 700 lm | 45 W | Dimmable 10 %...100 % | CCT Tunable | OFF 30/60 min | CCT | 3 YEARS WARRANTY

8 592920 122587

ZM5192 1/-/-/5

15 39 087 450 ZM5192

Christmas Lighting

EMOS GoSmart

- 64 lighting modes for a festive atmosphere
- Timer function for scheduled on/off
- Music synchronization for rhythmic blinking
- Various lengths 8–24 m, suitable for both indoor and outdoor use
- Connection to the home network via WIFI protocol
- Compatibility with EMOS GoSmart products and TUYA devices
- Voice control with Google Assistant and Amazon Alexa

Powered by

Works with Amazon Alexa Google Assistant

Download on the App Store | GET IT ON Google Play

- product: chain
- light color: RGB
- dimensions: 8 m
- area of use: both outdoor and indoor
- timer
- remote control: no
- number of LED: 80
- supply line length: 5 m
- power: 8.4 W

- IP rating: IP44
- lifetime: 10 000 hours
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife,
- protocol: Wi-Fi
- transmission frequency: 2,4 GHz Wi-Fi
- control by voice assistants
- notifications to the mobile app
- aplication languages: EN, CZ, SK, PL, DE, HU, SI, FR,





Wi Fi | IP44 | Change | 10 000 h | RGB | 64 multifunctional modes

8 592920 121702

D4ZR01	1/-/-/30
15 50 044 028	D4ZR01

- product: chain
- light color: RGB
- dimensions: 12 m
- area of use: both outdoor and indoor
- timer
- remote control: no
- number of LED: 120
- supply line length: 5 m
- power: 8.4 W

- IP rating: IP44
- lifetime: 10 000 hours
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife,
- protocol: Wi-Fi
- transmission frequency: 2,4 GHz Wi-Fi
- control by voice assistants
- notifications to the mobile app
- aplication languages: EN, CZ, SK, PL, DE, HU, SI, FR,





Wi Fi | IP44 | Change | 10 000 h | RGB | 64 multifunctional modes

8 592920 121726

D4ZR02	1/-/-/25
15 50 044 029	D4ZR02

- product: chain
- light color: RGB
- dimensions: 18 m
- area of use: both outdoor and indoor
- timer
- remote control: no
- number of LED: 180
- supply line length: 5 m
- power: 8.4 W

- IP rating: IP44
- lifetime: 10 000 hours
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife,
- protocol: Wi-Fi
- transmission frequency: 2,4 GHz Wi-Fi
- control by voice assistants
- notifications to the mobile app
- aplication languages: EN, CZ, SK, PL, DE, HU, SI, FR,






Wi Fi | IP44 | Change | 10 000 h | RGB | 64 multifunctional modes

8 592920 121740

D4ZR03	1/-/-/20
15 50 044 030	D4ZR03

- product: chain
- light color: RGB
- dimensions: 24 m
- area of use: both outdoor and indoor
- timer
- remote control: no
- number of LED: 240
- supply line length: 5 m
- power: 8.4 W

- IP rating: IP44
- lifetime: 10 000 hours
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife,
- protocol: Wi-Fi
- transmission frequency: 2,4 GHz Wi-Fi
- control by voice assistants
- notifications to the mobile app
- aplication languages: EN, CZ, SK, PL, DE, HU, SI, FR,





Wi Fi | IP44 | Change | 10 000 h | RGB | 64 multifunctional modes

8 592920 121764

D4ZR04	1/-/-/16
15 50 044 031	D4ZR04

Wiring and Control

Scenic switches

EMOS GoSmart

- Control multiple electrical devices or lights at once
- Define trigger events for individual buttons
- Long power supply battery life - up to 2 years
- Installation without pulling electrical cables
- Three-position buttons - press, double press, long press
- Communication via Zigbee protocol
- Compatible with EMOS GoSmart products and TUYA devices
- Voice control with Google Assistant and Amazon Alexa

Powered by

Works with Amazon Alexa Google Assistant

Download on the App Store

GET IT ON Google Play

- product: IP Smart Scene Switcher
- connectivity: ZigBee 2.4 GHz
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Zigbee 3.0
- pairing: automatic, manual
- use: automation
- number of control buttons: 1
- power supply: CR 2430 3 V
- supported OS: Android, iOS

ZigBee 3.0 | 1× button | 1× CR2430 | Remote control | Mechanical button





8 592920 121221

H5011 | 1/-/-/60

30 69 050 110 | IP-2001ZW

- product: IP Smart Scene Switcher
- connectivity: ZigBee 2.4 GHz
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Zigbee 3.0
- pairing: automatic, manual
- use: automation
- number of control buttons: 2
- power supply: CR 2430 3 V
- supported OS: Android, iOS

ZigBee 3.0 | 2× button | 1× CR2430 | Remote control | Mechanical button





8 592920 121474

H5012 | 1/-/-/60

30 69 050 120 | IP-2002ZW

- product: IP Smart Scene Switcher
- connectivity: ZigBee 2.4 GHz
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Zigbee 3.0
- pairing: automatic, manual
- use: automation
- number of control buttons: 4
- power supply: CR 2430 3 V
- supported OS: Android, iOS

ZigBee 3.0 | 4× button | 1× CR2430 | Remote control | Mechanical button





8 592920 121498

H5013 | 1/-/-/60

30 69 050 130 | IP-2004ZW

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- product: IP Smart Scene Switcher
- connectivity: ZigBee 2.4 GHz
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Zigbee 3.0
- pairing: automatic, manual
- use: automation
- number of control buttons: 1
- power supply: CR 2430 3 V
- supported OS: Android, iOS

ZigBee 3.0 | 1× button | 1× CR2430 | Remote control | Mechanical button





8 592920 121511

H5014 | 1/-/-/60

30 69 050 140 | IP-2001ZB

- product: IP Smart Scene Switcher
- connectivity: ZigBee 2.4 GHz
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Zigbee 3.0
- pairing: automatic, manual
- use: automation
- number of control buttons: 2
- power supply: CR 2430 3 V
- supported OS: Android, iOS

ZigBee 3.0 | 2× button | 1× CR2430 | Remote control | Mechanical button





8 592920 121535

H5015 | 1/-/-/60

30 69 050 150 | IP-2002ZB

- product: IP Smart Scene Switcher
- connectivity: ZigBee 2.4 GHz
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Zigbee 3.0
- pairing: automatic, manual
- use: automation
- number of control buttons: 4
- power supply: CR 2430 3 V
- supported OS: Android, iOS

ZigBee 3.0 | 4× button | 1× CR2430 | Remote control | Mechanical button





8 592920 121559

H5016 | 1/-/-/60

30 69 050 160 | IP-2004ZB

Zigbee gateways

EMOS GoSmart

- To expand the smart home with additional sensors and products
- Allows automation settings for added sensors and products
- Communication protocols Wi-Fi/Zigbee 3.0/BLE/SigMesh
- Compatibility with EMOS GoSmart products and TUYA devices

Powered by tuya

Works with Amazon Alexa Google Assistant

Download on the App Store | GET IT ON Google Play

- product: IP gateway
- connectivity: 2.4 GHz WIFI
- maximum number of connected clients: 50
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi/Zigbee 3.0/BLE/SigMesh
- pairing: automatic, manual
- use: automation
- number of control buttons: 1
- power supply: 5 V DC/1.0 A
- supported OS: Android, iOS

ZigBee | BLE | SigMesh | Wi Fi





8 592920 118627

H5001 | 1/-/-/120

30 69 050 010 | IP-1000Z

- product: ZigBee repeater
- connectivity: 2.4 GHz WIFI
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Zigbee 3.0
- pairing: automatic, manual
- use: automation
- power supply: 5 V DC/1.0 A
- supported OS: Android, iOS





ZigBee 3.0

8 592920 128725

H5022 | 1/-/-/60

30 69 052 030 | IP-2213Z

Sockets

EMOS GoSmart

- Remote on/off switching of connected appliances
- Overview of electricity consumption of connected appliances
- Schedule creation and automatic ON/OFF settings
- Setting up delayed shutdown of appliances
- Network connection via WIFI or Bluetooth protocols
- Compatibility with EMOS GoSmart products and TUYA devices
- Voice control with Google Assistant and Amazon Alexa

Powered by

Works with Amazon Alexa Google Assistant

Download on the App Store

GET IT ON Google Play

- product: Wi-Fi socket
- maximum load: 3 680 W
- voltage/current: 230 V~/16 A max.
- transmission frequency: 2.4 GHz WIFI
- children protection
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi
- control by voice assistants
- notifications to the mobile app





Wi Fi | Timer | Countdown | Circulate | Delayed turn off | Power meter | Energy saving

8 592920 120071

P5531 | 1/-/-/32

19 36 055 310 | IP-3002S

- product: Wi-Fi timer/wattmeter-outside
- maximum load: 3 680 W
- voltage/current: 230 V~/16 A max.
- transmission frequency: 2,4 GHz
- children protection
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi
- control by voice assistants
- notifications to the mobile app





Wi Fi | IP44 | Timer | Countdown | Circulate | Delayed turn off | Power meter | Energy saving

8 592920 122495

P5532 | 1/-/-/30

19 36 055 320 | IP-3006S

- product: ZigBee socket
- maximum load: 3 680 W
- voltage/current: 230 V~/16 A max.
- transmission frequency: 2,4 GHz
- children protection
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Zigbee 3.0
- control by voice assistants
- notifications to the mobile app





ZigBee 3.0 | Timer | Countdown | Circulate | Delayed turn off | Power meter | Energy saving

8 592920 131770

P5533 | 1/-/-/32

19 36 553 300 | IP-3009S

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- product: ZigBee socket
- maximum load: 3 680 W
- voltage/current: 230 V~/16 A max.
- transmission frequency: 2,4 GHz
- children protection
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Zigbee 3.0
- control by voice assistants
- notifications to the mobile app

ZigBee 3.0 | Timer | Countdown | Circulate | Delayed turn off | Power meter | Energy saving





8 592920 131817

P5534 | 1/-/-/30

19 36 553 400 | IP-3010S

Modules

EMOS GoSmart

- Remote control of connected devices
- Integration into home automation
- Variants for connection with or without the need for a neutral wire
- Easy installation under original switches
- Connection to the home network via WIFI/ZigBee protocol
- Compatibility with EMOS GoSmart products and TUYA devices
- Voice control with Google Assistant and Amazon Alexa

Powered by | Works with Amazon Alexa Google Assistant

Download on the App Store | GET IT ON Google Play

- product: IP switching module
- connectivity: ZigBee 2.4 GHz
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- control by voice assistants
- protocol: Zigbee 3.0
- pairing: automatic, manual
- use: indoor
- number of control buttons: 1
- power supply: 230 V~/50 Hz, max. 0,3 W
- supported OS: Android, iOS

ZigBee 3.0





8 592920 126066

H5101 | 1/-/-/100

30 69 051 010 | IP-2101SZ

- product: IP switching module
- connectivity: ZigBee 2.4 GHz
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- control by voice assistants
- protocol: Zigbee 3.0
- pairing: automatic, manual
- use: indoor
- number of control buttons: 1
- power supply: 230 V~/50 Hz, max. 0,3 W
- supported OS: Android, iOS

ZigBee 3.0





8 592920 126042

H5102 | 1/-/-/100

30 69 051 020 | IP-2102SZ

- product: IP switching module
- connectivity: ZigBee 2.4 GHz
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- control by voice assistants
- protocol: Zigbee 3.0
- pairing: automatic, manual
- use: indoor
- number of control buttons: 1
- power supply: 230 V~/50 Hz, max. 0,3 W
- supported OS: Android, iOS

ZigBee 3.0 No Neutral





8 592920 126028

H5103 | 1/-/-/100

30 69 051 030 | IP-2103SZ

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- product: IP switching module
- connectivity: ZigBee 2.4 GHz
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- control by voice assistants
- protocol: Zigbee 3.0
- pairing: automatic, manual
- use: indoor
- number of control buttons: 1
- power supply: 230 V~/50 Hz, max. 0,3 W
- supported OS: Android, iOS

ZigBee 3.0 No Neutral





8 592920 126004

H5104 | 1/-/-/100
30 69 051 040 | IP-2104SZ

- product: IP switching module
- connectivity: 2.4 GHz WIFI
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- control by voice assistants
- protocol: Wi-Fi
- pairing: automatic, manual
- use: indoor
- number of control buttons: 1
- power supply: 230 V~/50 Hz, max. 0,3 W
- supported OS: Android, iOS

Wi Fi





8 592920 125984

H5105 | 1/-/-/100
30 69 051 050 | IP-2101SW

- product: IP switching module
- connectivity: 2.4 GHz WIFI
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- control by voice assistants
- protocol: Wi-Fi
- pairing: automatic, manual
- use: indoor
- number of control buttons: 1
- power supply: 230 V~/50 Hz, max. 0,3 W
- supported OS: Android, iOS

Wi Fi





8 592920 125960

H5106 | 1/-/-/100
30 69 051 060 | IP-2102SW

- product: IP dimming module
- connectivity: ZigBee 2.4 GHz
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- control by voice assistants
- protocol: Zigbee 3.0
- pairing: automatic, manual
- use: indoor
- number of control buttons: 1
- power supply: 230 V~/50 Hz, max. 0,3 W
- supported OS: Android, iOS

ZigBee 3.0





8 592920 125946

H5107 | 1/-/-/100
30 69 051 070 | IP-2111DZ

- product: IP dimming module
- connectivity: ZigBee 2.4 GHz
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- control by voice assistants
- protocol: Zigbee 3.0
- pairing: automatic, manual
- use: indoor
- number of control buttons: 1
- power supply: 230 V~/50 Hz, max. 0,3 W
- supported OS: Android, iOS

ZigBee 3.0





8 592920 125922


H5108 | 1/-/-/100
30 69 051 080 | IP-2112DZ

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number	Packaging Type

- product: IP motor module
- connectivity: ZigBee 2.4 GHz
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- control by voice assistants
- protocol: Zigbee 3.0
- pairing: automatic, manual
- use: indoor
- number of control buttons: 1
- power supply: 230 V~/50 Hz, max. 0,3 W
- supported OS: Android, iOS





ZigBee 3.0

8 592920 125908

H5109 | 1/-/-/100
30 69 051 090 | IP-2121CZ

- product: IP motor module
- connectivity: ZigBee 2.4 GHz
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- control by voice assistants
- protocol: Zigbee 3.0
- pairing: automatic, manual
- use: indoor
- number of control buttons: 1
- power supply: 230 V~/50 Hz, max. 0,3 W
- supported OS: Android, iOS





ZigBee 3.0

8 592920 125885

H5110 | 1/-/-/100
30 69 051 100 | IP-2122CZ

- product: IP motor module
- connectivity: 2.4 GHz WIFI
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- control by voice assistants
- protocol: Wi-Fi/BLE
- pairing: automatic, manual
- use: indoor
- number of control buttons: 1
- power supply: 230 V~/50 Hz, max. 0,3 W
- supported OS: Android, iOS





Wi Fi

8 592920 132326

H5111 | 1/-/-/32
30 69 051 110 | IP-2131SW

Measurement and Control

Thermostats

EMOS GoSmart

- Reduce heating/cooling costs for buildings
- Individual temperature settings for different rooms
- Set temperature scenarios for specific day and time
- Control all settings from anywhere using the app
- Heating or air conditioning control based on GPS location
- Connection via WIFI or Zigbee protocols
- Compatibility with EMOS GoSmart products and TUYA devices
- Voice control with Google Assistant and Amazon Alexa


Powered by

Works with Amazon Alexa Google Assistant

Download on the App Store

GET IT ON Google Play

thermostat type: wire ▪ type of control: programmable electronic room thermostat, option to control via mobile phone (iOS, Android) ▪ backlight display ▪ control mode: heating and cooling system ▪ number of programs: customisable temperature (6× per day) ▪ temperature adjustment type: 6 temperature changes per day ▪ temperature measurement: 0 °C to 40 °C, resolution 0.1 °C ▪ temperature adjustment: from 5 °C up to 35 °C, after 0.5 °C ▪ anti-frost protection ▪ ON/OFF function ▪ holiday mode ▪ switching: voltage 230 V AC, 50 Hz ▪ switching load: 6 A resistive, 2 A inductive ▪ power source: 230 V AC ▪ dimensions: 138 × 88 × 33 mm

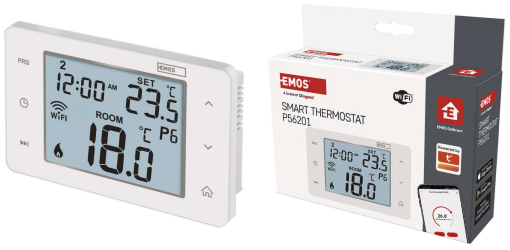

Wi Fi | Regulation based on GPS | Temperature calibration | Touch button control | Energy saving | Backlit display | 5–35 °C | Heating /Cooling | 230 V~ 50 Hz

8 592920 117767

P56201	1/-/-/12
21 01 900 000	P56201

thermostat type: wireless ▪ type of control: programmable electronic room thermostat, option to control via mobile phone (iOS, Android) ▪ backlight display ▪ control mode: heating and cooling system ▪ number of programs: customisable temperature (6× per day) ▪ temperature adjustment type: 6 temperature changes per day ▪ temperature measurement: 0 °C to 40 °C, resolution 0.1 °C ▪ temperature adjustment: from 5 °C up to 35 °C, after 0.5 °C ▪ anti-frost protection ▪ ON/OFF function ▪ holiday mode ▪ switching: 230 V AC or potential-free ▪ switching load: 16 A resistive, 4 A inductive ▪ power of transmitter: 5 V USB adapter (included) ▪ power of receiver: 230 V AC ▪ receiver's dimension: 37 × 86 × 86 mm ▪ transmitter's dimension: 40 × 138 × 96 mm



Wi Fi | Regulation based on GPS | Temperature calibration | Touch button control | Energy saving | Backlit display | 5–35 °C | Heating /Cooling | 868 MHz | 16 A/4 A

8 592920 117774

P56211	1/-/-/9
21 01 900 001	P56211

thermostat type: wired for underfloor heating, concealed ▪ type of control: programmable electronic room thermostat, option to control via mobile phone (iOS, Android) ▪ backlight display ▪ control mode: heating system ▪ number of programs: customisable temperature (6× per day) ▪ temperature adjustment type: 6 temperature changes per day ▪ temperature measurement: 0 °C to 95 °C, resolution 0.5 °C ▪ temperature adjustment: from 1 °C up to 70 °C, after 0.5 °C ▪ anti-frost protection ▪ ON/OFF function ▪ holiday mode ▪ switching: voltage 230 V AC, 50 Hz ▪ switching load: 16 A resistive ▪ power source: 230 V AC ▪ dimensions: 86 × 86 × 43 mm ▪ part of the package: thermostat, floor sensor 3 m, Ø 8 mm



Wi Fi | Regulation based on GPS | Room & floor sensor | Temperature calibration | Touch button control | Energy saving | 0–95 °C | Heating | 230 V~ 50 Hz

8 592920 117590

P56201UF	1/-/-/36
21 01 900 002	P56201UF

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

thermo shut-off valve: SMART, programmable ▪ number of programs: 1 customisable programme or customisable temperature (6× per day) ▪ temperature adjustment type: 6 temperature changes per day ▪ temperature measurement: 0 °C to 70 °C, resolution 0.5 °C ▪ temperature adjustment: 1 °C to 70 °C, resolution 0.5 °C ▪ anti-frost protection ▪ holiday mode ▪ open window function ▪ child lock ▪ matrix: M30 × 1.5 mm ▪ enclosed adaptors: Danfoss RA, RAV, RAVL ▪ power source: 2× 1.5 V AA (included) ▪ dimensions: 55 × 94 × 55 mm ▪ packaging: 1 pc, small box





ZigBee | Regulation based on GPS | Child lock | Open window function | Silent operation | Energy saving | Human detection | 1–70 °C | 2× AA

8 592920 117613

P5630S | 1/-/-/24

21 01 900 003 | P5630S

Weather stations and Thermometers

EMOS GoSmart

- For measuring indoor temperature and humidity
- Display temperature and humidity data history in the app
- Temperature and humidity alerts via alarm
- Small size and elegant design
- Battery powered
- Connection to home network via ZigBee protocol
- Compatibility with EMOS GoSmart products and TUYA devices
- Voice control with Google Assistant and Amazon Alexa

Powered by

Works with Amazon Alexa Google Assistant

Download on the App Store

GET IT ON Google Play

- thermometer design: wireless – smart
- indoor temperature: -20 °C to +60 °C, resolution 0.1
- indoor humidity: 0 % to 99 % RH, resolution 1 %
- temperature warning
- the possibility of hanging on the wall
- power of station: 1× 3 V CR2032 (included)
- main unit size: 26 × 13 × 52 mm





ZigBee 3.0 | 1× 3 V CR2032 included

8 592920 129357

EGS0102 | 1/-/-/80

26 03 122 000 | EGS0102

- thermometer design: wireless – smart
- clock: wifi
- LED backlight display
- date
- indoor temperature: -10 °C to +60 °C, resolution 0.1
- indoor humidity: 0 % to 99 % RH, resolution 1 %
- min. and max. temperature
- temperature warning
- the possibility of hanging on the wall
- power of station: 3× 1.5 V AAA (not included)
- main unit size: 56 × 23 × 56 mm
- screen size: 42 × 40 mm





ZigBee 3.0 | °C IN | % IN | Max/Min | Temperature warning | Wifi controlled | Backlit display | 3× AAA

8 592920 129371

EGS0101 | 1/-/-/80

26 03 123 000 | EGS0101

EMOS
A brand of legrand

www.emos.eu | Order Code Item Number | Packaging Type

Air quality

EMOS GoSmart

- Overview of the CO2 level in the monitored room
- Display of indoor temperature, humidity and hours
- LED display with permanent backlight
- Colour animation of air quality
- Built-in alarm for elevated CO2 concentration
- Connection to home network via WIFI protocol
- Compatibility with EMOS GoSmart products and TUYA devices
- Voice control with Google Assistant and Amazon Alexa

Powered by

Works with Amazon Alexa Google Assistant

Download on the App Store | GET IT ON Google Play

- option to set the temperature unit: °C/°F
- CO2 alert
- setting CO2 alert limits
- CO2 level indicator
- CO2 measurement range: 400 to 5 000 PPM
- indoor temperature: 0 °C to +50 °C, resolution 0.1°C
- indoor humidity: 20 % to 90 % RH, resolution 1 %
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife

- protocol: Wi-Fi
- transmission frequency: 2.4 GHz Wi-Fi
- notifications to the mobile app
- aplication languages: EN, CZ, SK, PL, DE, HU, SI, FR,





Wi Fi | CO_2 detection | CO_2 alert | °C IN | % IN | Clock & alarm clock | Comfort view | Data storage | Backlit display | 1× USB-C

8 592920 126318

E30300	1/-/-/12
26 27 303 000	E30300

Control valves

EMOS GoSmart

- Manual and automatic control
- Timer function for setting a schedule
- High power and torque
- Immediate response to crash detection
- Connection to home network via ZIGBEE protocol
- Compatibility with EMOS GoSmart products and TUYA devices
- Voice control with Google Assistant and Amazon Alexa

Powered by

Works with Amazon Alexa Google Assistant

Download on the App Store | GET IT ON Google Play

- product: valve controller
- pipe diameter: 1/2'', 3/4'', 1'' a 1 1/4''
- torque: max. 5.88 Nm
- operating temperature: -10 °C to 55 °C
- operating humidity: <95 %
- IP rating: IP20
- power source: DC 12 V/1 000 mA, 1.4 m (included)
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife

- protocol: Zigbee 3.0
- transmission frequency: 2.4 GHz Wi-Fi
- notifications to the mobile app
- control by voice assistants
- aplication languages: EN, CZ, SK, PL, DE, HU, SI, FR,





ZigBee 3.0 | Water & gas control | Automatic & manual | Timer | Voice control | Energy saving | Silent operation | 12 V DC/ 1 000 mA

8 592920 126202

P5640S	1/-/-/12
21 05 564 000	P5640S

Household and Garden

Bathroom Scales

EMOS GoSmart

- Wide range of measuring indicators
- Clear reports in graphical form
- Memory for several users
- Elegant design
- Weighing accuracy to 100 g, max. load capacity 180 kg
- Connection to home network via Bluetooth
- Compatibility with EMOS GoSmart products and TUYA devices

Powered by

Download on the App Store

GET IT ON Google Play

- backlight display
- scale surface: ITO tempered glass
- maximum load: 180 kg
- Bluetooth
- BMI – measurement of fat, water and muscle
- weight units: kg, lb
- memory: 10 persons max.
- power source: 3× 1.5 V AAA (included)
- dimensions: 26 × 300 × 300 mm

- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife,
- protocol: Wi-Fi
- transmission frequency: 2.4 GHz Wi-Fi
- notifications to the mobile app
- aplication languages: EN, CZ, SK, PL, DE, HU, SI, FR,





Wi Fi | BMI Index | 18 Body values | % Body fat rate | Muscle mass | Weight reports | 180 kg max. | 3× 1.5 V AAA included

8 592920 122129

EV112	1/-/-/3
26 17 010 902	EV112

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

Batteries



GP Batteries

GP Consumer batteries

GP Alkaline

GP Ultra Plus

- most powerful line of GP alkaline batteries
- for demanding devices requiring maximum performance
- up to 200 % more power than standard alkaline batteries
- long lasting performance
- operating temperature from -20 °C to +54 °C
- shelf life up to 10 years

0% MERCURY

- chemical constitution: alkaline
- type: LR03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 13 g
- operating temperature: -20 °C to +54 °C
- packaging: 2 pcs, small paper box





4 891199 218163

B03112 2/-/20/160

10 13 122 000 GP 24AUP

- chemical constitution: alkaline
- type: LR03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 13 g
- operating temperature: -20 °C to +54 °C
- packaging: 4 pcs, small paper box





4 891199 203985

B03114 4/-/40/320

10 13 124 000 GP 24AUP

- chemical constitution: alkaline
- type: LR03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 13 g
- operating temperature: -20 °C to +54 °C
- packaging: 10 pc, small paper box





4 891199 222252

B0314G | 10/-/100/400
10 17 101 000 | GPPCA24UP

- chemical constitution: alkaline
- type: LR6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 24 g
- operating temperature: -20 °C to +54 °C
- packaging: 2 pcs, small paper box





4 891199 216633

B03212 | 2/-/20/160
10 13 222 000 | GP 15AUP

- chemical constitution: alkaline
- type: LR6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 24 g
- operating temperature: -20 °C to +54 °C
- packaging: 4 pcs, small paper box





4 891199 203923

B03214 | 4/-/40/320
10 13 224 000 | GP 15AUP

- chemical constitution: alkaline
- type: LR6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 28 g
- operating temperature: -20 °C to +54 °C
- packaging: 10 pc, small paper box





4 891199 222238

B0324G | 10/-/100/400
10 17 201 000 | GP15AUP

- chemical constitution: alkaline
- type: LR14 (C battery)
- voltage: 1.5 V
- dimensions: 26.2 × 50.0 mm
- weight: 70 g
- operating temperature: -18 °C to +50 °C
- packaging: 2 pcs, small paper box





4 891199 217654

B03312 | 2/-/20/160
10 13 322 000 | GP 14AUP

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- chemical constitution: alkaline
- type: LR20 (D battery)
- voltage: 1.5 V
- dimensions: 34.2 × 61.5 mm
- weight: 142 g
- operating temperature: -18 °C to +50 °C
- packaging: 2 pcs, small paper box







4 891199 220159

B03412 2/-/20/80

10 13 422 000 GP 13AUP

- chemical constitution: alkaline
- type: 6LR61 9 V
- voltage: 9 V
- dimensions: 26.5 × 17.5 × 48.5 mm
- weight: 47 g
- operating temperature: -18 °C to +50 °C
- packaging: 1 pc, small paper box







4 891199 216442

B03511 1/-/10/200

10 13 521 000 GP 1604AUP

GP Ultra

- suitable for devices with medium power consumption
- up to 80 % more power than standard alkaline batteries
- operating temperature from -20 °C to +54 °C
- shelf life up to 10 years



- chemical constitution: alkaline
- type: LR03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 11.5 g
- operating temperature: -18 °C to +50 °C
- packaging: 2 pcs, small paper box







4 891199 218101

B02112 2/-/20/160

10 14 122 000 GP 24A

- chemical constitution: alkaline
- type: LR03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 11.5 g
- operating temperature: -18 °C to +50 °C
- packaging: 4 pcs, small paper box







4 891199 218255

B02114 4/-/40/320

10 13 124 100 GP 24AU

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- chemical constitution: alkaline
- type: LR03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 11.5 g
- operating temperature: -18 °C to +50 °C
- packaging: 6 pcs, small paper box





4 891199 218347

B0211V
10 13 126 000

6/-/72/864
GP 24AU

- chemical constitution: alkaline
- type: LR03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 11.5 g
- operating temperature: -18 °C to +50 °C
- packaging: 8 pcs, small paper box





4 891199 219603

B02118
10 13 128 100

8/-/96/768
GP 24AU

- chemical constitution: alkaline
- type: LR6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 23 g
- operating temperature: -18 °C to +50 °C
- packaging: 2 pcs, small paper box





4 891199 217326

B02212
10 14 222 000

2/-/20/160
GP 15A

- chemical constitution: alkaline
- type: LR6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 23 g
- operating temperature: -18 °C to +50 °C
- packaging: 4 pcs, small paper box





4 891199 217357

B02214
10 13 224 100

4/-/40/320
GP 15AU

- chemical constitution: alkaline
- type: LR6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 23 g
- operating temperature: -18 °C to +50 °C
- packaging: 6 pcs, small paper box





4 891199 217388

B0221V
10 13 226 000

6/-/72/576
GP 15AU

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- chemical constitution: alkaline
- type: LR6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 23 g
- operating temperature: -18 °C to +50 °C
- packaging: 8 pcs, small paper box







4 891199 219665

B02218
10 13 228 100

8/-/96/576
GP 15AU

- chemical constitution: alkaline
- type: LR14 (C battery)
- voltage: 1.5 V
- dimensions: 26.2 × 50.0 mm
- weight: 68 g
- operating temperature: -18 °C to +50 °C
- packaging: 2 pcs, small paper box







4 891199 217753

B02312
10 13 322 100

2/-/20/160
GP 14AU

- chemical constitution: alkaline
- type: LR20 (D battery)
- voltage: 1.5 V
- dimensions: 34.2 × 61.5 mm
- weight: 140 g
- operating temperature: -18 °C to +50 °C
- packaging: 2 pcs, small paper box







4 891199 220166

B02412
10 13 422 100

2/-/20/80
GP 13AU

- chemical constitution: alkaline
- type: 6LR61 9 V
- voltage: 9 V
- dimensions: 26.5 × 17.5 × 48.5 mm
- weight: 47 g
- operating temperature: -18 °C to +50 °C
- packaging: 1 pc, small paper box







4 891199 216398

B02511
10 13 521 100

1/-/10/200
GP 1604AU

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

GP Super

- basic series of GP alkaline batteries
- for use in devices with low power consumption
- up to 7× more energy than standard zinc-carbon batteries
- operating temperature from -20 °C to +54 °C
- shelf life up to 10 years

0% MERCURY

- chemical constitution: alkaline
- type: LR03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 11.5 g
- operating temperature: -18 °C to +50 °C
- packaging: 2 pcs, shrink





4 891199 217968

B01102
10 13 102 002

2/40/200/1 000
GP24A

- chemical constitution: alkaline
- type: LR03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 11.5 g
- operating temperature: -18 °C to +50 °C
- packaging: 4 pcs, small paper box





4 891199 218224

B01114
10 13 124 200

4/-/40/320
GP 24A

- chemical constitution: alkaline
- type: LR03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 11.5 g
- operating temperature: -18 °C to +50 °C
- packaging: 8 pcs, small paper box






4 891199 218439

B01118
10 13 128 000

8/-/96/768
GP 24A

- chemical constitution: alkaline
- type: LR03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 11.5 g
- operating temperature: -18 °C to +50 °C
- packaging: 10 pc, small paper box





4 891199 224089

B0111G
10 13 121 001

10/-/60/480
GP 24A

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- chemical constitution: alkaline
- type: LR03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 11.5 g
- operating temperature: -18 °C to +50 °C
- packaging: 20 pcs, shrink



4 891199 224577

B0110L
10 13 122 001

20/-/320/960
GP 24A

- chemical constitution: alkaline
- type: LR03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 11.5 g
- operating temperature: -18 °C to +50 °C
- packaging: 288 pcs, display box



4 891199 224430

B0114T
10 13 101 201

288/-/288/1 152
GP 24A

- chemical constitution: alkaline
- type: LR6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 23 g
- operating temperature: -18 °C to +50 °C
- packaging: 2 pcs, shrink



4 891199 216671

B01202
10 13 202 002

2/40/200/600
GP 15A

- chemical constitution: alkaline
- type: LR6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 23 g
- operating temperature: -18 °C to +50 °C
- packaging: 4 pcs, small paper box



4 891199 216763

B01214
10 13 224 200

4/-/40/320
GP 15A

- chemical constitution: alkaline
- type: LR6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 23 g
- operating temperature: -18 °C to +50 °C
- packaging: 8 pcs, small paper box



4 891199 216886

B01218
10 13 228 000

8/-/96/576
GP 15A

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- chemical constitution: alkaline
- type: LR6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 23 g
- operating temperature: -18 °C to +50 °C
- packaging: 10 pc, small paper box





4 891199 224072

B0121G
10 13 221 001

10/-/60/480
GP 15A

- chemical constitution: alkaline
- type: LR6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 23 g
- operating temperature: -18 °C to +50 °C
- packaging: 20 pcs, shrink





4 891199 224546

B0120L
10 13 222 001

20/-/240/480
GP 15A

- chemical constitution: alkaline
- type: LR6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 23 g
- operating temperature: -18 °C to +50 °C
- packaging: 288 pcs, display box





4 891199 224416

B0124T
10 13 201 201

288/-/-/576
GP 15A

- chemical constitution: alkaline
- type: LR14 (C battery)
- voltage: 1.5 V
- dimensions: 26.2 × 50.0 mm
- weight: 68 g
- operating temperature: -18 °C to +50 °C
- packaging: 2 pcs, shrink



4 891199 217814

B01302
10 13 302 001

2/-/24/192
GP 14A

- chemical constitution: alkaline
- type: LR14 (C battery)
- voltage: 1.5 V
- dimensions: 26.2 × 50.0 mm
- weight: 68 g
- operating temperature: -18 °C to +50 °C
- packaging: 4 pcs, shrink



4 891199 217883

B01304
10 13 304 001

4/48/-/192
GP 14A


EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- chemical constitution: alkaline
- type: LR14 (C battery)
- voltage: 1.5 V
- dimensions: 26.2 × 50.0 mm
- weight: 68 g
- operating temperature: -18 °C to +50 °C
- packaging: 2 pcs, small paper box





4 891199 217784

B01312 2/-/20/160

10 13 322 200 GP 14A

- chemical constitution: alkaline
- type: LR20 (D battery)
- voltage: 1.5 V
- dimensions: 34.2 × 61.5 mm
- weight: 140 g
- operating temperature: -18 °C to +50 °C
- packaging: 2 pcs, shrink





4 891199 219061

B01402 2/-/20/80

10 13 402 001 GP 13A

- chemical constitution: alkaline
- type: LR20 (D battery)
- voltage: 1.5 V
- dimensions: 34.2 × 61.5 mm
- weight: 140 g
- operating temperature: -18 °C to +50 °C
- packaging: 4 pcs, shrink





4 891199 219313

B01404 4/48/-/96

10 13 404 001 GP 13A

- chemical constitution: alkaline
- type: LR20 (D battery)
- voltage: 1.5 V
- dimensions: 34.2 × 61.5 mm
- weight: 140 g
- operating temperature: -18 °C to +50 °C
- packaging: 2 pcs, small paper box





4 891199 220142

B01412 2/-/20/80

10 13 422 200 GP 13A

- chemical constitution: alkaline
- type: 6LR61 9 V
- voltage: 9 V
- dimensions: 26.5 × 17.5 × 48.5 mm
- weight: 47 g
- operating temperature: -18 °C to +50 °C
- packaging: 1 pc, shrink





4 891199 216282

B01501 1/10/50/300

10 13 501 001 GP 1604A

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- chemical constitution: alkaline
- type: 6LR61 9 V
- voltage: 9 V
- dimensions: 26.5 × 17.5 × 48.5 mm
- weight: 47 g
- operating temperature: -18 °C to +50 °C
- packaging: 1 pc, small paper box





4 891199 216251

B01511
10 13 521 200

1/-/10/200
GP 1604A

- chemical constitution: alkaline
- type: LR6 (AA battery)/LR03 (AAA battery)
- voltage: 1.5 V
- weight: 23 g
- operating temperature: -18 °C to +50 °C
- packaging: 2 304 pcs (AA) + 1 728 pcs (AAA)





B0125T
10 13 800 000

1/-/-/1
GP 15A

GP Batteries

GP Consumer batteries

GP Carbon Zinc

GP Greencell

- advanced version of zinc-carbon batteries
- operating temperature from -20 °C to +40 °C
- shelf life up to 3 years

0% MERCURY

- chemical constitution: zinc-chloride
- type: R6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 17.3 g
- operating temperature: 0 °C to +45 °C
- packaging: 4 pcs, shrink





4 891199 000119

B1220
10 12 204 000

4/40/200/1 000
GP 15G

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- chemical constitution: zinc-chloride
- type: R6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 17.3 g
- operating temperature: 0 °C to +45 °C
- packaging: 12 pcs, shrink





4 891199 065118

B1220F
10 12 209 002

12/-/204/612
GP 15G

- chemical constitution: zinc-chloride
- type: R6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 17.3 g
- operating temperature: 0 °C to +45 °C
- packaging: 4 pcs, blister





4 891199 000133

B1221
10 12 214 000

4/-/72/288
GP 15G

- chemical constitution: zinc-chloride
- type: R03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 8.5 g
- operating temperature: 0 °C to +45 °C
- packaging: 4 pcs, shrink





4 891199 014574

B12104
10 12 104 000

4/40/200/1 000
GP 24G

- chemical constitution: zinc-chloride
- type: R03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 8.5 g
- operating temperature: 0 °C to +45 °C
- packaging: 12 pcs, shrink





4 891199 083945

B1210F
10 12 109 002

12/-/204/612
GP 24G

- chemical constitution: zinc-chloride
- type: R03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 8.5 g
- operating temperature: 0 °C to +45 °C
- packaging: 4 pcs, blister





4 891199 000478

B1211
10 12 114 000

4/-/40/480
GP 24G

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- chemical constitution: zinc-chloride
- type: R14 (C battery)
- voltage: 1.5 V
- dimensions: 26.2 × 50.0 mm
- weight: 48 g
- operating temperature: 0 °C to +45 °C
- packaging: 2 pcs, shrink





4 891199 000096

B1230 | 2/-/24/240

10 12 302 000 | GP 14G

- chemical constitution: zinc-chloride
- type: R14 (C battery)
- voltage: 1.5 V
- dimensions: 26.2 × 50.0 mm
- weight: 48 g
- operating temperature: 0 °C to +45 °C
- packaging: 2 pcs, blister





4 891199 000102

B1231 | 2/-/20/240

10 12 312 000 | GP 14G

- chemical constitution: zinc-chloride
- type: R20 (D battery)
- voltage: 1.5 V
- dimensions: 34.2 × 61.5 mm
- weight: 97 g
- operating temperature: 0 °C to +45 °C
- packaging: 2 pcs, shrink





4 891199 000072

B1240 | 2/-/20/120

10 12 402 000 | GP 13G

- chemical constitution: zinc-chloride
- type: R20 (D battery)
- voltage: 1.5 V
- dimensions: 34.2 × 61.5 mm
- weight: 97 g
- operating temperature: 0 °C to +45 °C
- packaging: 2 pcs, blister





4 891199 000089

B1241 | 2/-/20/120

10 12 412 000 | GP 13G

- chemical constitution: zinc-chloride
- type: 6F22 9 V (1604)
- voltage: 9 V
- dimensions: 26.5 × 17.5 × 48.5 mm
- weight: 36 g
- operating temperature: 0 °C to +45 °C
- packaging: 1 pc, shrink





4 891199 002205


B1250 | 1/10/-/300

10 12 501 000 | GP 1604GLF

EMOS A brand of legrand | www.emos.eu | Order Code Item Number | Packaging Type

- chemical constitution: zinc-chloride
- type: 6F22 9 V (1604)
- voltage: 9 V
- dimensions: 26.5 × 17.5 × 48.5 mm
- weight: 36 g
- operating temperature: 0 °C to +45 °C
- packaging: 1 pc, blister





4 891199 002212 | **B1251** | 1/-/10/200
10 12 511 000 | GP 1604GLF

- chemical constitution: zinc-chloride
- type: 3R12 4.5 V (lantern battery)
- voltage: 4.5 V
- dimensions: 62 × 22 × 67 mm
- weight: 115 g
- operating temperature: 0 °C to +45 °C
- packaging: 1 pc, shrink





4 891199 000362 | **B1260** | 1/-/20/120
10 12 601 000 | GP 312G

GP Supercell

- for devices with low power consumption
- operating temperature from -20 °C to +40 °C
- shelf life up to 3 years

- chemical constitution: zinc-carbon
- type: R6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 14.6 g
- operating temperature: 0 °C to +45 °C
- packaging: 2 pcs, shrink





4 891199 030956 | **B11202** | 2/40/200/800
10 11 202 001 | GP 15PL

- chemical constitution: zinc-carbon
- type: R03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 8.5 g
- operating temperature: 0 °C to +45 °C
- packaging: 2 pcs, shrink





4 891199 008009 | **B1110** | 2/40/200/1 000
10 11 102 000 | GP 24PL

GP Batteries

GP Consumer batteries

GP Other batteries

GP Lithium cylindrical

- 1/3rd lighter and 7× stronger than standard alkaline batt.
- use modern technologies for maximum battery safety
- best choice for professionals
- for capturing up to 800 photos
- outstanding performance at high power consumption
- ideal for extremes of between -40 °C to +60 °C
- extremely long shelf life of up to 10 years

- chemical constitution: lithium
- type: FR6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 14.5 g
- operating temperature: -40 °C to +60 °C
- packaging: 2 pcs, blister





4 891199 130755

B15212 | 2/-/20/160
10 22 000 711 | GP 15LF

- chemical constitution: lithium
- type: FR03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 7.5 g
- operating temperature: -30 °C to +60 °C
- packaging: 2 pcs, blister





4 891199 169328

B15112 | 2/-/20/160
10 22 000 412 | GP 24LF

- chemical constitution: lithium
- type: CR-V9 (U9VL,1604LC)
- voltage: 9 V
- dimensions: 26.5 × 17.5 × 48.5 mm
- weight: 34 g
- operating temperature: -40 °C to +60 °C
- packaging: 1 pc, blister





4 891199 104565

B1509 | 1/-/10/450
10 22 000 911 | GP CR-V9

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- chemical constitution: lithium
- type: CR123A (CR123AP, CR17345)
- voltage: 3 V
- capacity: 1 500 mAh
- dimensions: 17.0 × 34.5 mm
- weight: 16 g
- operating temperature: -40 °C to +60 °C
- packaging: 1 pc, blister






4 891199 001086

B1501
10 22 000 111

1/-/10/450
GP CR123A

- chemical constitution: lithium
- type: CR-P2 (EL223AP, DL223A)
- voltage: 6 V
- capacity: 1 400 mAh
- dimensions: 34.8 × 19.5 × 35.8 mm
- weight: 37 g
- operating temperature: -40 °C to +60 °C
- packaging: 1 pc, blister





4 891199 001093

B1502
10 22 000 211

1/-/10/450
GP CR-P2

- chemical constitution: lithium
- type: 2CR5 (EL2CR5BP, DL245)
- voltage: 6 V
- capacity: 1 400 mAh
- dimensions: 34 × 17 × 45 mm
- weight: 40 g
- operating temperature: -40 °C to +60 °C
- packaging: 1 pc, blister





4 891199 001109

B1505
10 22 000 511

1/-/10/450
GP 2CR5

- chemical constitution: lithium
- type: CR2 (DLCR2)
- voltage: 3 V
- capacity: 800 mAh
- dimensions: 15.3 × 26.5 mm
- weight: 10 g
- operating temperature: -40 °C to +60 °C
- packaging: 1 pc, blister





4 891199 006999

B1506
10 22 000 611

1/-/10/450
GP CR2

- chemical constitution: lithium
- type: CR123A (CR123A Econ, CR17345)
- voltage: 3 V
- capacity: 1 400 mAh
- dimensions: 17.0 × 34.5 mm
- weight: 16 g
- operating temperature: -40 °C to +60 °C
- packaging: 1 pc, blister





4 891199 192043

B1501E
10 22 000 114


1/-/10/450
CR123AE

GP Lithium button

- wide range of packaging, size and model
- wide range of operating temperatures: -10 °C to +60 °C
- shelf life up to 10 years

- chemical constitution: lithium
- type: GP CR1/3N
- voltage: 3 V
- capacity: 160 mAh
- dimensions: 11.6 × 10.8 mm
- weight: 3.3 g
- operating temperature: -20 °C to +60 °C
- packaging: 1 pc, blister






4 891199 028175

B15711 | 1/-/10/720
10 42 103 011 | GP CR1/3N

- chemical constitution: lithium
- type: GP CR1025
- voltage: 3 V
- capacity: 30 mAh
- dimensions: 10.0 × 2.5 mm
- weight: 0.7 g
- operating temperature: -20 °C to +60 °C
- packaging: 1 pc, blister






4 891199 211485

B15101 | 1/-/10/900
10 42 102 511 | GP CR1025

- chemical constitution: lithium
- type: GP CR1216
- voltage: 3 V
- capacity: 30 mAh (discharge load 30 kOhm)
- dimensions: 12.5 × 1.6 mm
- weight: 0.6 g
- operating temperature: -20 °C to +60 °C
- packaging: 1 pc, blister






4 891199 028144

B15651 | 1/10/100/900
10 42 121 611 | GP CR1216

- chemical constitution: lithium
- type: GP CR1220
- voltage: 3 V
- capacity: 36 mAh (discharge load 30 kOhm)
- dimensions: 12.5 × 2.0 mm
- weight: 0.8 g
- operating temperature: -20 °C to +60 °C
- packaging: 1 pc, blister





4 891199 004346

B15201 | 1/10/100/900
10 42 122 011 | GP CR1220

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- chemical constitution: lithium
- type: GP CR1220
- voltage: 3 V
- capacity: 36 mAh (discharge load 30 kOhm)
- dimensions: 12.5 × 2.0 mm
- weight: 0.8 g
- operating temperature: -20 °C to +60 °C
- packaging: 5 pcs, blister






4 891199 001345

B1520 | 5/-/100/2 000

10 42 122 015 | GP CR1220

- chemical constitution: lithium
- type: GP CR1225
- voltage: 3 V
- capacity: 62 mAh
- dimensions: 12.5 × 2.5 mm
- weight: 1.0 g
- operating temperature: -20 °C to +60 °C
- packaging: 1 pc, blister






4 891199 205255

B15221 | 1/-/10/900

10 42 122 511 | GP CR1225

- chemical constitution: lithium
- type: GP CR1616
- voltage: 3 V
- capacity: 50 mAh
- dimensions: 16.0 × 1.6 mm
- weight: 1.1 g
- operating temperature: -20 °C to +60 °C
- packaging: 1 pc, blister






4 891199 003691

B15601 | 1/10/100/900

10 42 161 611 | GP CR1616

- chemical constitution: lithium
- type: GP CR1620
- voltage: 3 V
- capacity: 75 mAh
- dimensions: 16.0 × 2.0 mm
- weight: 1.3 g
- operating temperature: -20 °C to +60 °C
- packaging: 1 pc, blister





4 891199 028151

B15701 | 1/10/100/900

10 42 162 011 | GP CR1620

- chemical constitution: lithium
- type: GP CR1620
- voltage: 3 V
- capacity: 75 mAh
- dimensions: 16.0 × 2.0 mm
- weight: 1.3 g
- operating temperature: -20 °C to +60 °C
- packaging: 5 pcs, blister





4 891199 063886

B1570 | 5/-/100/2 000

10 42 162 015 | GP CR1620


EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- chemical constitution: lithium
- type: GP CR1632
- voltage: 3 V
- capacity: 140 mAh
- dimensions: 16.0 × 3.2 mm
- weight: 1.8 g
- operating temperature: -20 °C to +60 °C
- packaging: 1 pc, blister






4 891199 149030

B15951 | 1/10/100/900

10 42 163 221 | GP CR1632

- chemical constitution: lithium
- type: GP CR2016
- voltage: 3 V
- capacity: 90 mAh
- dimensions: 20.0 × 1.6 mm
- weight: 1.5 g
- operating temperature: -20 °C to +60 °C
- packaging: 1 pc, blister






4 891199 003707

B15161 | 1/10/100/900

10 42 201 611 | GP CR2016

- chemical constitution: lithium
- type: GP CR2016
- voltage: 3 V
- capacity: 90 mAh
- dimensions: 20.0 × 1.6 mm
- weight: 1.5 g
- operating temperature: -20 °C to +60 °C
- packaging: 2 pcs, blister





4 891199 139215

B15163 | 2/-/20/720

10 42 201 612 | GP CR2016

- chemical constitution: lithium
- type: GP CR2016
- voltage: 3 V
- capacity: 90 mAh
- dimensions: 20.0 × 1.6 mm
- weight: 1.5 g
- operating temperature: -20 °C to +60 °C
- packaging: 5 pcs, blister






4 891199 001123

B1516 | 5/-/100/2 000

10 42 201 615 | GP CR2016

- chemical constitution: lithium
- type: GP CR2025
- voltage: 3 V
- capacity: 165 mAh
- dimensions: 20.0 × 2.5 mm
- weight: 2.5 g
- operating temperature: -20 °C to +60 °C
- packaging: 1 pc, blister





4 891199 003714

B15251 | 1/10/100/900

10 42 202 511 | GP CR2025

EMOS
A brand of legrand


www.emos.eu

Order Code
Item Number

Packaging
Type

- chemical constitution: lithium
- type: GP CR2025
- voltage: 3 V
- capacity: 165 mAh
- dimensions: 20.0 × 2.5 mm
- weight: 2.5 g
- operating temperature: -20 °C to +60 °C
- packaging: 2 pcs, blister





4 891199 139208

B15253
10 42 202 512

2/-/20/720
GP CR2025

- chemical constitution: lithium
- type: GP CR2025
- voltage: 3 V
- capacity: 165 mAh
- dimensions: 20.0 × 2.5 mm
- weight: 2.5 g
- operating temperature: -20 °C to +60 °C
- packaging: 5 pcs, blister






4 891199 001130

B1525
10 42 202 515

5/-/100/2 000
GP CR2025

- chemical constitution: lithium
- type: GP CR2032
- voltage: 3 V
- capacity: 240 mAh
- dimensions: 20.0 × 3.2 mm
- weight: 3.1 g
- operating temperature: -20 °C to +60 °C
- packaging: 1 pc, blister






4 891199 003721

B15322
10 42 203 211

1/10/100/900
GP CR2032

- chemical constitution: lithium
- type: GP CR2032
- voltage: 3 V
- capacity: 240 mAh
- dimensions: 20.0 × 3.2 mm
- weight: 3.1 g
- operating temperature: -20 °C to +60 °C
- packaging: 2 pcs, blister





4 891199 139192

B15323
10 42 203 212

2/20/-/720
GP CR2032

- chemical constitution: lithium
- type: GP CR2032
- voltage: 3 V
- capacity: 240 mAh
- dimensions: 20.0 × 3.2 mm
- weight: 3.1 g
- operating temperature: -20 °C to +60 °C
- packaging: 5 pcs, blister





4 891199 001147

B1532
10 42 203 215

5/-/100/2 000
GP CR2032

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- chemical constitution: lithium
- type: GP CR2320
- voltage: 3 V
- capacity: 130 mAh
- dimensions: 23.0 × 2.0 mm
- weight: 3,0 g
- operating temperature: -20 °C to +60 °C
- packaging: 1 pc, blister





4 891199 211980

B15451
10 42 232 011

1/-/10/900
GP CR2320

- chemical constitution: lithium
- type: GP CR2325
- voltage: 3 V
- capacity: 190 mAh
- dimensions: 23.0 × 2.5 mm
- weight: 3.3 g
- operating temperature: -20 °C to +60 °C
- packaging: 1 pc, blister





4 891199 205286

B15431
10 42 232 511

1/-/10/900
GP CR2325

- chemical constitution: lithium
- type: GP CR2330
- voltage: 3 V
- capacity: 260 mAh
- dimensions: 23.0 × 3.0 mm
- weight: 4.0 g
- operating temperature: -20 °C to +60 °C
- packaging: 1 pc, blister






4 891199 205316

B15441
10 42 233 011

1/-/10/900
GP CR2330

- chemical constitution: lithium
- type: GP CR2354
- voltage: 3 V
- capacity: 560 mAh
- dimensions: 23.0 × 5.4 mm
- weight: 6.9 g
- operating temperature: -20 °C to +60 °C
- packaging: 1 pc, blister






4 891199 204234

B15231
10 42 235 411

1/-/10/900
CR2354

- chemical constitution: lithium
- type: GP CR2430
- voltage: 3 V
- capacity: 300 mAh
- dimensions: 24.5 × 3.0 mm
- weight: 4.3 g
- operating temperature: -20 °C to +60 °C
- packaging: 1 pc, blister





4 891199 003738

B15301
10 42 243 011

1/10/100/900
GP CR2430

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- chemical constitution: lithium
- type: GP CR2430
- voltage: 3 V
- capacity: 300 mAh
- dimensions: 24.5 × 3.0 mm
- weight: 4.3 g
- operating temperature: -20 °C to +60 °C
- packaging: 5 pcs, blister






4 891199 001154

B1530
10 42 243 015

5/100/-/1 000
GP CR2430

- chemical constitution: lithium
- type: GP CR2450
- voltage: 3 V
- capacity: 590 mAh
- dimensions: 24.5 × 5.0 mm
- weight: 6.6 g
- operating temperature: -20 °C to +60 °C
- packaging: 1 pc, blister





4 891199 063916

B15851
10 42 245 011

1/-/10/600
GP CR2450

- chemical constitution: lithium
- type: GP CR2450
- voltage: 3 V
- capacity: 590 mAh
- dimensions: 24.5 × 5.0 mm
- weight: 6.6 g
- operating temperature: -20 °C to +60 °C
- packaging: 5 pcs, blister





4 891199 063954

B1585
10 42 245 015

5/-/100/1 000
GP CR2450

- chemical constitution: lithium
- type: GP CR2477
- voltage: 3 V
- capacity: 590 mAh
- dimensions: 24.5 × 7.7 mm
- weight: 6.6 g
- operating temperature: -20 °C to +60 °C
- packaging: 1 pc, blister





4 891199 211270

B15771
10 42 247 711

1/-/10/600
GP CR2477

- chemical constitution: lithium
- type: GP CR3032
- voltage: 3 V
- capacity: 500 mAh
- dimensions: 30.0 × 3.2 mm
- weight: 6.8 g
- operating temperature: -20 °C to +60 °C
- packaging: 1 pc, blister





4 891199 204265

B15331
10 42 303 211

1/-/10/600
GP CR3032

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- chemical constitution: lithium
- type: GP CR2025
- voltage: 3 V
- capacity: 165 mAh
- dimensions: 20.0 × 2.5 mm
- weight: 2.5 g
- operating temperature: -20 °C to +60 °C
- packaging: 4 pcs, blister





4 891199 162350

B15254 | 4/-/40/2 400
10 42 202 514 | GP CR2025

- chemical constitution: lithium
- type: CR2032
- voltage: 3 V
- capacity: 240 mAh
- dimensions: 20.0 × 3.2 mm
- weight: 3.1 g
- operating temperature: -20 °C to +60 °C
- packaging: 4 pcs, blister





4 891199 162381

B15324 | 4/-/40/2 400
10 42 203 214 | GP CR2032

GP Special alkaline

- long-lasting performance
- stable operating voltage
- operating temperature from 0 °C to +45 °C
- shelf life up to 3 years

0% MERCURY

- chemical constitution: alkaline-special
- type: GP 23AF (V23GA, MN21, A23)
- voltage: 12 V
- capacity: 55 mAh (discharge load 20 kOhm)
- dimensions: 10.22 × 28.2 mm
- weight: 7.9 g
- operating temperature: 0 °C to +45 °C
- packaging: 1 pc, blister





4 891199 042119

B13001 | 1/-/10/720
10 21 002 311 | GP 23AF

- chemical constitution: alkaline-special
- type: GP 23AF (V23GA, MN21, A23)
- voltage: 12 V
- capacity: 55 mAh (discharge load 20 kOhm)
- dimensions: 10.22 × 28.2 mm
- weight: 7.9 g
- operating temperature: 0 °C to +45 °C
- packaging: 5 pcs, blister





4 891199 042140

B1300 | 5/-/100/1 000
10 21 002 315 | GP 23AF

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- chemical constitution: alkaline-special
- type: GP 27A (A27, MN27, A90)
- voltage: 12 V
- capacity: 20 mAh (discharge load 20 kOhm)
- dimensions: 8.0 × 28.2 mm
- weight: 4.4 g
- operating temperature: 0 °C to +45 °C
- packaging: 1 pc, blister





4 891199 003783

B13011
10 21 002 711

1/10/-/600
GP 27AF

- chemical constitution: alkaline-special
- type: GP 27A (A27, MN27, A90)
- voltage: 12 V
- capacity: 20 mAh (discharge load 20 kOhm)
- dimensions: 8.0 × 28.2 mm
- weight: 4.4 g
- operating temperature: 0 °C to +45 °C
- packaging: 5 pcs, blister





4 891199 011504

B1301
10 21 002 715

5/-/100/1 000
GP 27AF

- chemical constitution: alkaline-special
- type: GP 11AF
- voltage: 6 V
- capacity: 38 mAh (discharge load 10 kOhm)
- dimensions: 10.22 × 16.5 mm
- weight: 4.0 g
- operating temperature: 0 °C to +45 °C
- packaging: 1 pc, blister





4 891199 003776

B13021
10 21 001 111

1/-/10/720
GP 11AF

- chemical constitution: alkaline-special
- type: GP 11AF
- voltage: 6 V
- capacity: 38 mAh (discharge load 10 kOhm)
- dimensions: 10.22 × 16.5 mm
- weight: 4.0 g
- operating temperature: 0 °C to +45 °C
- packaging: 5 pcs, blister





4 891199 011467

B1302
10 21 001 115

5/-/100/1 000
GP 11AF

- chemical constitution: alkaline-special
- type: GP 476AF (4LR44, PX28A, V4034PX)
- voltage: 6 V
- capacity: 105 mAh (discharge load 6 kOhm)
- dimensions: 13.0 × 25.2 mm
- weight: 10 g
- operating temperature: 0 °C to +45 °C
- packaging: 1 pc, blister





4 891199 003769

B1303
10 21 047 612

1/-/10/600
GP 476AF

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- chemical constitution: alkaline-special
- type: GP 910A (N, LR1)
- voltage: 1.5 V
- capacity: 885 mAh (discharge load 20 kOhm)
- dimensions: 12.0 × 30.2 mm
- weight: 9 g
- operating temperature: 0 °C to +45 °C
- packaging: 2 pcs, blister





4 891199 000065

B1305
10 21 091 012

2/-/20/160
GP 910A

- chemical constitution: alkaline-special
- type: GP 25A (AAAA, LR61, LR8, MN2500)
- voltage: 1.5 V
- capacity: 525 mAh (discharge load 42 kOhm)
- dimensions: 8.3 × 42.5 mm
- weight: 6.8 g
- operating temperature: 0 °C to +45 °C
- packaging: 2 pcs, blister





4 891199 058615

B1306
10 21 002 512

2/-/20/160
GP 25A

- chemical constitution: alkaline-special
- type: GP 29A (A29, 32A, A32, L822)
- voltage: 9 V
- dimensions: 8.0 × 21.9 mm
- weight: 3.5 g
- operating temperature: 0 °C to +45 °C
- packaging: 1 pc, blister





4 891199 003929

B13951
10 21 002 911


1/-/10/600
GP 29AF

GP Alkaline button

- long-lasting performance
- voltage of 1.5 V
- operating temperature 0 °C to +45 °C
- shelf life up to 3 years

- chemical constitution: alkaline
- type: GP A76F (AG13, LR44, LR1154, V13GA, PX76A)
- voltage: 1.5 V
- capacity: 110 mAh (discharge load 1.6 kOhm)
- dimensions: 11.6 × 5.4 mm
- weight: 1.7 g
- operating temperature: 0 °C to +45 °C
- packaging: 1 pc, blister





4 891199 003967

B13762
10 41 007 611

1/-/10/750
GP A76F

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- chemical constitution: alkaline
- type: GP A76F (AG13, LR44, LR1154, V13GA, PX76A)
- voltage: 1.5 V
- capacity: 110 mAh (discharge load 1.6 kOhm)
- dimensions: 11.6 × 5.4 mm
- weight: 1.7 g
- operating temperature: 0 °C to +45 °C
- packaging: 5 pcs, blister






4 891199 011597

B1376
10 41 007 615

5/-/100/1 000
GP A76F

- chemical constitution: alkaline
- type: GP 186F (AG12, LR43, LR1142, V12GA)
- voltage: 1.5 V
- capacity: 70 mAh (discharge load 1.6 kOhm)
- dimensions: 11.6 × 4.2 mm
- weight: 1.4 g
- operating temperature: 0 °C to +45 °C
- packaging: 1 pc, blister






4 891199 003974

B13861
10 41 018 611

1/-/10/750
GP 186F

- chemical constitution: alkaline
- type: GP 189F (AG10, LR54, LR1130, V10GA)
- voltage: 1.5 V
- capacity: 44 mAh (discharge load 3.9 kOhm)
- dimensions: 11.6 × 3.05 mm
- weight: 1.0 g
- operating temperature: 0 °C to +45 °C
- packaging: 1 pc, blister





4 891199 003981

B13892
10 41 018 911

1/-/10/750
GP 189F

- chemical constitution: alkaline
- type: GP 189F (AG10, LR54, LR1130, V10GA)
- voltage: 1.5 V
- capacity: 44 mAh (discharge load 3.9 kOhm)
- dimensions: 11.6 × 3.05 mm
- weight: 1.0 g
- operating temperature: 0 °C to +45 °C
- packaging: 10 pcs, blister






4 891199 015519

B1389
10 41 018 910

10/-/250/5 000
GP 189F

- chemical constitution: alkaline
- type: GP 192F (LR41, V3GA)
- voltage: 1.5 V
- capacity: 24 mAh (discharge load 30 kOhm)
- dimensions: 7.9 × 3.6 mm
- weight: 0.5 g
- operating temperature: 0 °C to +45 °C
- packaging: 1 pc, blister





4 891199 136542

B13921
10 41 019 211

1/-/10/750
GP 192F

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- chemical constitution: alkaline
- type: GP 192F (LR41, V3GA)
- voltage: 1.5 V
- capacity: 24 mAh (discharge load 6.2 kOhm)
- dimensions: 7.9 × 3.6 mm
- weight: 0.5 g
- operating temperature: 0 °C to +45 °C
- packaging: 5 pcs, blister






4 891199 011634

B13925
10 41 019 205

5/-/100/1 000
GP 192F

- chemical constitution: alkaline
- type: GP PX625A (LR9, V625U)
- voltage: 1.5 V
- capacity: 190 mAh (discharge load 600 Ohm)
- dimensions: 15.6 × 5.95 mm
- weight: 2.9 g
- operating temperature: 0 °C to +45 °C
- packaging: 1 pc, blister






4 891199 003820

B1325
10 41 062 511

1/10/-/750
GP 625AF

- chemical constitution: alkaline
- type: GP A76F (AG13, LR44, LR1154, V13GA, PX76A)
- voltage: 1.5 V
- capacity: 110 mAh (discharge load 1.6 kOhm)
- dimensions: 11.6 × 5.4 mm
- weight: 1.7 g
- operating temperature: 0 °C to +45 °C
- packaging: 2 pcs, blister





4 891199 139222

B13763
10 41 007 601

2/-/20/1 500
GP A76F

GP Silver oxide

- long-lasting performance
- voltage of 1.55 V
- operating temperature from 0 °C to +45 °C
- shelf life up to 3 years

- chemical constitution: silver oxide
- type: GP 357F (SR44, SR1154, V357)
- voltage: 1.55 V
- capacity: 165 mAh (discharge load 3.0 kOhm)
- dimensions: 11.6 × 5.4 mm
- operating temperature: 0 °C to +45 °C
- packaging: 1 pc, blister





4 891199 111822

B3357F1
10 43 035 721

1/-/10/750
GP 357F

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- chemical constitution: silver oxide
- type: GP 377F (SR66, SR626, V377)
- voltage: 1.55 V
- capacity: 24 mAh (discharge load 33 kOhm)
- dimensions: 6.8 × 2.6 mm
- weight: 0.4 g
- operating temperature: 0 °C to +45 °C
- packaging: 1 pc, blister





4 891199 111808

B3377F1 1/-/10/750

10 43 037 721 GP 377F

- chemical constitution: silver oxide
- type: GP 364F (SR60, SR621, V364)
- voltage: 1.55 V
- capacity: 17 mAh (discharge load 6.2 kOhm)
- dimensions: 6.8 × 2.15 mm
- operating temperature: 0 °C to +45 °C
- packaging: 1 pc, blister





4 891199 138805

B3364F1 1/10/-/750

10 43 036 431

- chemical constitution: silver oxide
- type: GP 389F (SR54, SR1130, V389)
- voltage: 1.55 V
- capacity: 70 mAh (discharge load 3 kOhm)
- dimensions: 11.6 × 3.05 mm
- operating temperature: 0 °C to +45 °C
- packaging: 1 pc, blister





4 891199 138836

B3389F1 1/10/-/750

10 43 038 921

- chemical constitution: silver oxide
- type: GP 392F (SR41, SR736, V392)
- voltage: 1.55 V
- capacity: 42 mAh (discharge load 3.0 kOhm)
- dimensions: 7.9 × 3.6 mm
- operating temperature: 0 °C to +45 °C
- packaging: 1 pc, blister





4 891199 111846


B3392F1 1/10/-/750

10 43 039 221

GP Zinc air

- long lasting power +50 %
- consistent sound quality
- ideal also for latest wireless hearing aid devices
- longer battery tab for easy insertion into hearing aids
- safety and quality assurance
- storage time 4 years
- made in UK

- chemical constitution: zinc-air
- type: GP ZA10 (7005ZD, PR70)
- voltage: 1.45 V
- capacity: 90 mAh (discharge load 1.5 kOhm)
- dimensions: 5.8 × 3.6 mm
- weight: 0.3 g
- operating temperature: -10 °C to +50 °C
- packaging: 6 pcs, blister





5 000252 102410

B3510 | 6/60/300/3 000

10 44 001 016 | GP ZA10

- chemical constitution: zinc-air
- type: GP ZA13 (7000ZD, PR48)
- voltage: 1.45 V
- capacity: 290 mAh (discharge load 625 Ohm)
- dimensions: 7.9 × 5.4 mm
- weight: 0.8 g
- operating temperature: -10 °C to +50 °C
- packaging: 6 pcs, blister






4 891199 005152

B3513 | 6/60/300/3 000

10 44 001 316 | GP ZA13

- chemical constitution: zinc-air
- type: GP ZA312 (7002ZD, PR41)
- voltage: 1.45 V
- capacity: 170 mAh (discharge load 1.0 kOhm)
- dimensions: 7.9 × 3.6 mm
- weight: 0.5 g
- operating temperature: -10 °C to +50 °C
- packaging: 6 pcs, blister





5 000252 102519

B3512 | 6/60/300/3 000

10 44 031 216 | GP ZA312

- chemical constitution: zinc-air
- type: GP ZA675 (7003ZD, PR44)
- voltage: 1.45 V
- capacity: 620 mAh (discharge load 300 Ohm)
- dimensions: 11.6 × 5.4 mm
- weight: 1.8 g
- operating temperature: -10 °C to +50 °C
- packaging: 6 pcs, blister





4 891199 005176

B3575 | 6/60/300/3 000

10 44 067 516 | GP ZA675

GP Batteries

GP Consumer batteries

GP Rechargeable

GP ReCyko Pro

- high-performance rechargeable batteries with long run time
- at least 1 500 recharge cycles *
- extremely low self-discharge effect *
- charged to 70 % even after 5 years of no use *
- precharged from production – for immediate use
- friendly to the environment and your wallet
- * (valid for Professional line)

energy lock | 5 years storage | ready to use

- chemical constitution: NiMH
- type: HR03 (AAA battery)
- voltage: 1.2 V
- capacity: 800 mAh
- number of charging cycles: more than 1 500
- dimensions: 10.5 × 44.5 mm
- weight: 14 g
- operating temperature: -20 °C to +50 °C
- packaging: 4 pcs, small paper box





1500 charging cycles

4 891199 212758

B26184	4/-/40/400
10 32 124 080	85AAAHCBP

- chemical constitution: NiMH
- type: HR03 (AAA battery)
- voltage: 1.2 V
- capacity: 800 mAh
- number of charging cycles: more than 1 500
- dimensions: 10.5 × 44.5 mm
- weight: 14 g
- operating temperature: -20 °C to +50 °C
- packaging: 6 pcs, small paper box






1500 charging cycles

4 891199 222344

B2618V	6/-/60/720
10 32 126 080	85AAAHCBP

- chemical constitution: NiMH
- type: HR6 (AA battery)
- voltage: 1.2 V
- capacity: 2 000 mAh
- number of charging cycles: more than 1 500
- dimensions: 14.5 × 50.5 mm
- weight: 30 g
- operating temperature: -20 °C to +50 °C
- packaging: 4 pcs, small paper box





1500 charging cycles

4 891199 212734

B26204	4/-/40/400
10 32 224 200	210AAHCBP

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- chemical constitution: NiMH
- type: HR6 (AA battery)
- voltage: 1.2 V
- capacity: 2 000 mAh
- number of charging cycles: more than 500
- dimensions: 14.5 × 50.5 mm
- weight: 30 g
- operating temperature: -20 °C to +50 °C
- packaging: 4 pcs, small paper box






500 charging cycles

4 891199 212765

B2629 | 4/-/40/400

10 32 224 201 | 210AAHCF

- chemical constitution: NiMH
- type: HR6 (AA battery)
- voltage: 1.2 V
- capacity: 2 000 mAh
- number of charging cycles: more than 1 500
- dimensions: 14.5 × 50.5 mm
- weight: 30 g
- operating temperature: -20 °C to +50 °C
- packaging: 6 pcs, small paper box





1500 charging cycles

4 891199 222337

B2620V | 6/-/60/360

10 32 226 200 | 210AAHCBP

GP ReCyko

- wide range of capacities and retail packages
- one of the longest run times available on the market
- low self-discharge – charged to 70 % after a year of no use
- precharged from production – for immediate use
- friendly to the environment and your wallet

super **strong**

1 year 70% **storage**

ready to use

- chemical constitution: NiMH
- type: HR03 (AAA battery)
- voltage: 1.2 V
- capacity: 650 mAh
- number of charging cycles: more than 1 000
- dimensions: 10.5 × 44.5 mm
- weight: 12 g
- operating temperature: -20 °C to +50 °C
- packaging: 2 pcs, small paper box





1000 charging cycles

4 891199 212666

B25162 | 2/-/20/200

10 32 122 062 | 65AAAHCE

- chemical constitution: NiMH
- type: HR03 (AAA battery)
- voltage: 1.2 V
- capacity: 850 mAh
- number of charging cycles: more than 500
- dimensions: 10.5 × 44.5 mm
- weight: 14.5 g
- operating temperature: -20 °C to +50 °C
- packaging: 2 pcs, small paper box





500 charging cycles

4 891199 212642

B25182 | 2/-/20/200

10 32 122 080 | 85AAAHCE

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- chemical constitution: NiMH
- type: HR03 (AAA battery)
- voltage: 1.2 V
- capacity: 950 mAh
- number of charging cycles: more than 500
- dimensions: 10.5 × 44.5 mm
- weight: 15 g
- operating temperature: -20 °C to +50 °C
- packaging: 2 pcs, small paper box





500 charging cycles

4 891199 212628

B25112
10 32 122 090

2/-/20/200
100AAAHCE

- chemical constitution: NiMH
- type: HR03 (AAA battery)
- voltage: 1.2 V
- capacity: 850 mAh
- number of charging cycles: more than 500
- dimensions: 14.5 × 50.5 mm
- weight: 14.5 g
- operating temperature: -20 °C to +50 °C
- packaging: 4 pcs, small paper box





500 charging cycles

4 891199 212659

B25184
10 32 124 081

4/-/40/400
85AAAHCE

- chemical constitution: NiMH
- type: HR03 (AAA battery)
- voltage: 1.2 V
- capacity: 950 mAh
- number of charging cycles: more than 500
- dimensions: 10.5 × 44.5 mm
- weight: 15 g
- operating temperature: -20 °C to +50 °C
- packaging: 4 pcs, small paper box






500 charging cycles

4 891199 212635

B25114
10 32 124 090

4/-/40/400
100AAAHCE

- chemical constitution: NiMH
- type: HR03 (AAA battery)
- voltage: 1.2 V
- capacity: 950 mAh
- number of charging cycles: more than 500
- dimensions: 10.5 × 44.5 mm
- weight: 15 g
- operating temperature: -20 °C to +50 °C
- packaging: 6 pcs, small paper box





500 charging cycles

4 891199 222351

B2511V
10 32 126 090

6/-/60/720
100AAAHCE

- chemical constitution: NiMH
- type: HR6 (AA battery)
- voltage: 1.2 V
- capacity: 1 300 mAh
- number of charging cycles: more than 500
- dimensions: 14.5 × 50.5 mm
- weight: 23 g
- operating temperature: -20 °C to +50 °C
- packaging: 2 pcs, small paper box





500 charging cycles

4 891199 212604

B25232
10 32 222 131

2/-/20/200
130AAHCE

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number	Packaging Type

- chemical constitution: NiMH
- type: HR6 (AA battery)
- voltage: 1.2 V
- capacity: 2 100 mAh
- number of charging cycles: more than 500
- dimensions: 14.5 × 50.5 mm
- weight: 27 g
- operating temperature: -20 °C to +50 °C
- packaging: 2 pcs, small paper box





500 charging cycles

4 891199 212581

B25212 2/-/20/200

10 32 222 211 210AAHCE

- chemical constitution: NiMH
- type: HR6 (AA battery)
- voltage: 1.2 V
- capacity: 2 600 mAh
- number of charging cycles: more than 300
- dimensions: 14.5 × 50.5 mm
- weight: 31 g
- operating temperature: -20 °C to +50 °C
- packaging: 2 pcs, small paper box





300 charging cycles

4 891199 212567

B25272 2/-/20/200

10 32 222 260 270AAHCE

- chemical constitution: NiMH
- type: HR6 (AA battery)
- voltage: 1.2 V
- capacity: 2 100 mAh
- number of charging cycles: more than 500
- dimensions: 14.5 × 50.5 mm
- weight: 27 g
- operating temperature: -20 °C to +50 °C
- packaging: 4 pcs, small paper box






500 charging cycles

4 891199 212598

B25214 4/-/40/400

10 32 224 210 210AAHCE

- chemical constitution: NiMH
- type: HR6 (AA battery)
- voltage: 1.2 V
- capacity: 2 600 mAh
- number of charging cycles: up to 300
- dimensions: 14.5 × 50.5 mm
- weight: 31 g
- operating temperature: -20 °C to +50 °C
- packaging: 4 pcs, small paper box





300 charging cycles

4 891199 212574

B25274 4/-/40/400

10 32 224 260 270AAHCE

- chemical constitution: NiMH
- type: HR6 (AA battery)
- voltage: 1.2 V
- capacity: 2 100 mAh
- number of charging cycles: more than 500
- dimensions: 14.5 × 50.5 mm
- weight: 27 g
- operating temperature: -20 °C to +50 °C
- packaging: 6 pcs, small paper box





500 charging cycles

4 891199 222375

B2521V 6/-/60/360

10 32 226 212 210AAHCF

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- chemical constitution: NiMH
- type: HR6 (AA battery)
- voltage: 1.2 V
- capacity: 2 600 mAh
- number of charging cycles: up to 300
- dimensions: 14.5 × 50.5 mm
- weight: 31 g
- operating temperature: -20 °C to +50 °C
- packaging: 6 pcs, small paper box





300 charging cycles

4 891199 222368

B2527V 6/-/60/360

10 32 226 260 270AAHCE

- chemical constitution: NiMH
- type: HR14 (C battery)
- voltage: 1.2 V
- capacity: 3 000 mAh
- number of charging cycles: more than 1 000
- dimensions: 26.2 × 50.0 mm
- weight: 60 g
- operating temperature: -20 °C to +50 °C
- packaging: 2 pcs, small paper box





1000 charging cycles

4 891199 212697

B2533 2/-/12/120

10 32 322 301 300CHC

- chemical constitution: NiMH
- type: HR20 (D battery)
- voltage: 1.2 V
- capacity: 3 000 mAh
- number of charging cycles: more than 1 000
- dimensions: 34.2 × 61.5 mm
- weight: 70 g
- operating temperature: -20 °C to +50 °C
- packaging: 2 pcs, small paper box





1000 charging cycles

4 891199 212703

B2543 2/-/12/72

10 32 422 300 300DHC

- chemical constitution: NiMH
- type: 6HR61 9 V (1604)
- voltage: 8.4 V
- capacity: 200 mAh
- number of charging cycles: more than 500
- dimensions: 26.5 × 15.7 × 48.5 mm
- weight: 42.5 g
- operating temperature: -20 °C to +50 °C
- packaging: 1 pc, small paper box





500 charging cycles

4 891199 212710

B2552 1/-/10/100

10 32 521 021 20R8H

- chemical constitution: NiMH
- type: HR6 (AA battery)
- voltage: 1.2 V
- capacity: 1 700 mAh
- number of charging cycles: more than 700
- dimensions: 14.5 × 50.5 mm
- weight: 26.2 g
- operating temperature: -20 °C to +50 °C
- packaging: 4 pcs, small paper box





700 charging cycles

10 year storage

4 891199 204647

B24294 4/-/40/400

10 33 224 170 170AAHCV

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

Raver Batteries

Raver Lithium cylindrical

RAVER lithium extreme

- suitable for digital cameras and flashes
- electronic toys, hobby models, MP3 players, PDAs and GPS
- also meet the requirements of healthcare tools and devices
- ideal for use in extreme temperatures of -40 °C to +60 °C
- shelf life up to 10 years



- chemical constitution: lithium
- type: FR03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 7.2 g
- operating temperature: -40 °C to +60 °C
- packaging: 2 pcs, blister







8 595025 364357

B7811 | 2/-/28/280

13 21 112 000 | RLT FR03-B2

- chemical constitution: lithium
- type: FR6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 15.5 g
- operating temperature: -40 °C to +60 °C
- packaging: 2 pcs, blister







8 595025 364388

B7821 | 2/-/20/200

13 21 212 000 | RLT FR6-B2

Raver Batteries

Raver Alkaline

Raver Ultra

- top performance in devices with low long-term consumption
- up to 7× more energy than standard zinc-carbon batteries
- operating temperature from -20 °C to +60 °C
- shelf life up to 7 years

- chemical constitution: alkaline
- type: LR03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 11.5 g
- operating temperature: -20 °C to +60 °C
- packaging: 4 pcs, blister





8 595025 345899

B7911 | 4/-/40/320
13 20 114 000 | RUA LR03-B4

- chemical constitution: alkaline
- type: LR03 (AAA battery)
- voltage: 1.5 V
- dimensions: 10.5 × 44.5 mm
- weight: 11.5 g
- operating temperature: -20 °C to +60 °C
- packaging: 8 pcs, shrink





8 595025 348630

B79118 | 8/-/96/960
13 20 118 000 | RUA LR03-S8

- chemical constitution: alkaline
- type: LR6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 23,8 g
- operating temperature: -20 °C to +60 °C
- packaging: 4 pcs, blister





8 595025 345882

B7921 | 4/-/40/320
13 20 214 000 | RUA LR6-B4

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- chemical constitution: alkaline
- type: LR6 (AA battery)
- voltage: 1.5 V
- dimensions: 14.5 × 50.5 mm
- weight: 23,8 g
- operating temperature: -20 °C to +60 °C
- packaging: 8 pcs, shrink







8 595025 348609

B79218
13 20 218 000

8/-/96/960
RUA LR6-S8

Raver Batteries

Raver Rechargeable

RAVER Rechargeable for solar lamps

- RAVER SOLAR – excellent choice for solar garden lights
- it often only takes a new battery to get a light to work
- rechargeable batteries save both money and the environment
- also usable for other undemanding devices
- operating temperature from -20 °C to +50 °C

- chemical constitution: NiMH
- type: HR03 (AAA battery)
- voltage: 1.2 V
- capacity: 400 mAh
- number of charging cycles: more than 500
- dimensions: 10.5 × 44.5 mm
- weight: 9 g
- operating temperature: -20 °C to +50 °C
- packaging: 2 pcs, blister





8 592920 007808

B7414
13 32 112 040

2/-/32/384
RAVER SOLAR AAA

- chemical constitution: NiMH
- type: HR6 (AA battery)
- voltage: 1.2 V
- capacity: 600 mAh
- number of charging cycles: more than 500
- dimensions: 14.5 × 50.5 mm
- weight: 15 g
- operating temperature: -20 °C to +50 °C
- packaging: 2 pcs, blister





8 592920 007839

B7426
13 32 212 030

2/-/24/288
RAVER SOLAR AA

Raver Batteries

Raver Other batteries

Raver Lithium button

RAVER lithium cell

- suitable for devices requiring a stable supply of power
- e.g. watches, calculators, alarms, manometers, etc.
- long service life
- operating temperature from -10 °C to +60 °C
- shelf life up to 10 years

- chemical constitution: lithium
- type: CR2016
- voltage: 3 V
- capacity: 75 mAh (discharge load 30 kOhm)
- dimensions: 20.0 × 1.6 mm
- weight: 1.7 g
- operating temperature: -10 °C to +60 °C
- packaging: 5 pcs, blister





8 592920 018682

B7316
13 26 021 605

5/150/-/1 800
RAVER CR2016

- chemical constitution: lithium
- type: CR2032
- voltage: 3 V
- capacity: 220 mAh (discharge load 15 kOhm)
- dimensions: 20.0 × 3.2 mm
- weight: 3.1 g
- operating temperature: -10 °C to +60 °C
- packaging: 5 pcs, blister





8 592920 018705

B7332
13 26 023 205

5/-/150/1 800
RAVER CR2032

Batteries EMOS, lead acid battery

Lead acid batteries

- maintenance-free, valve-controlled industrial lead accumulators
- for low-cost powering of devices
- hermetically sealed lead AGM accumulators
- wide range of uses – fire alarms, communication devices, UPS
- optimal service life 5 years

B9651 1/-/-/20
12 01 000 500 OT1.3-6 (E613)



voltage: 6 V ▪ capacity: 1.3 Ah ▪ weight: 0.3 kg ▪ terminal: faston 4.7 mm ▪ optimal lifetime: 5 years ▪ dimensions: 97 × 24 × 51 mm ▪ packaging: 1 pc

B9641 1/-/-/20
12 01 000 100 OT4-6(E640)



for lanterns: 3810 (P2301), 3810 LED (P2304), 3810 LED EXPERT (P2305), 3810 10W + COB (P2308) ▪ chemical constitution: Pb ▪ voltage: 6 V ▪ capacity: 4 Ah ▪ dimensions: 70 × 47 × 101 mm ▪ packaging: 1 pc

B9659 1/-/-/16
12 01 000 520 OT7-6 (E670)



voltage: 6 V ▪ capacity: 7 Ah ▪ weight: 1 kg ▪ terminal: faston 4.7 mm ▪ optimal lifetime: 5 years ▪ dimensions: 151 × 34 × 94 mm ▪ packaging: 1 pc

B9682 1/-/-/10
12 01 003 500 OT12-6 (E-6120)



voltage: 6 V ▪ capacity: 12 Ah ▪ weight: 1.8 kg ▪ terminal: faston 4.7 mm ▪ optimal lifetime: 5 years ▪ dimensions: 151 × 51 × 94 mm ▪ packaging: 1 pc

B9652 1/-/-/20
12 01 000 600 OT1.3-12 (E1213; E1.3-12)



voltage: 12 V ▪ capacity: 1.3 Ah ▪ weight: 0.5 kg ▪ terminal: faston 4.7 mm ▪ optimal lifetime: 5 years ▪ dimensions: 97 × 45 × 53 mm ▪ packaging: 1 pc

B9672 1/-/-/20
12 01 002 600 OT2.2-12 (E1222)



voltage: 12 V ▪ capacity: 2.2 Ah ▪ weight: 0.95 kg ▪ terminal: faston 4.7 mm ▪ optimal lifetime: 5 years ▪ dimensions: 178 × 35 × 61 mm ▪ packaging: 1 pc

EMOS
A brand of legrand

www.emos.eu

Order Code / Item Number | Packaging Type

B9653 1/-/-/10
12 01 000 700
OT4.5-12 (E1245)



8 595025 340832

voltage: 12 V ▪ capacity: 4.5 Ah ▪ weight: 1.46 kg ▪ terminal: faston 4.7 mm ▪ optimal lifetime: 5 years ▪ dimensions: 91 × 71 × 105 mm ▪ packaging: 1 pc

B9679 1/-/-/10
12 01 003 300
OT5-12 (E1250)



8 592920 004890

voltage: 12 V ▪ capacity: 5 Ah ▪ weight: 1,65 kg ▪ terminal: faston 6.3 mm ▪ optimal lifetime: 5 years ▪ dimensions: 91 × 71 × 105 mm ▪ packaging: 1 pc

B9691 1/-/-/10
12 01 004 300
OT7-12 (E1270)



8 592920 018187

voltage: 12 V ▪ capacity: 7 Ah ▪ weight: 2.05 kg ▪ terminal: faston 4.7 mm ▪ optimal lifetime: 5 years ▪ dimensions: 151 × 65 × 94 mm ▪ packaging: 1 pc

B9654 1/-/-/10
12 01 000 800
OT7.2-12 (E1272; E7.2-12)



8 595025 340849

voltage: 12 V ▪ capacity: 7.2 Ah ▪ weight: 2.2 kg ▪ terminal: faston 4.7 mm ▪ optimal lifetime: 5 years ▪ dimensions: 151 × 65 × 94 mm ▪ packaging: 1 pc

B9674 1/-/-/10
12 01 002 800
OT 7.2-12(OT 7.2-12 T2)



8 592920 004449

voltage: 12 V ▪ capacity: 7.2 Ah ▪ weight: 2.2 kg ▪ terminal: faston 6.3 mm ▪ optimal lifetime: 5 years ▪ dimensions: 151 × 65 × 94 mm ▪ packaging: 1 pc

B9675 1/-/-/10
12 01 002 900
OT9-12 (E1290)



8 592920 004463

voltage: 12 V ▪ capacity: 9 Ah ▪ weight: 2.42 kg ▪ terminal: faston 6.3 mm ▪ optimal lifetime: 5 years ▪ dimensions: 151 × 65 × 94 mm ▪ packaging: 1 pc

B9656 1/-/-/4
12 01 000 850
OT12-12 (E12120; E12-12)



8 595025 343529

voltage: 12 V ▪ capacity: 12 Ah ▪ weight: 3.3 kg ▪ terminal: faston 6.3 mm ▪ optimal lifetime: 5 years ▪ dimensions: 151 × 98 × 96 mm ▪ packaging: 1 pc

B9656V 1/-/-/2
12 01 004 800
6-DZM-12



8 592920 091838

voltage: 12 V ▪ capacity: 15 Ah/20 hrs (14 Ah/10 hrs, 12 Ah/2 hrs) ▪ weight: 4.25 kg ▪ terminal: faston 6.3 mm ▪ optimal lifetime: 4 years for cyclic operation (approx. 1 200 cycles for 30 % D.O.D = discharge depth) ▪ dimensions: 150 × 100 × 102 mm ▪ packaging: 1 pc

B9655 1/-/-/4
12 01 000 900
OT17-12 (E12180; OT 18-12)



8 595025 340856

voltage: 12 V ▪ capacity: 18 Ah ▪ weight: 4.88 kg ▪ terminal: 12 × 12 × 2 mm ▪ optimal lifetime: 5 years ▪ dimensions: 181 × 77 × 167 mm ▪ packaging: 1 pc

B9683 1/-/-/2
12 01 003 600
OT26-12/W; (E12260)



8 592920 006399

voltage: 12 V ▪ capacity: 26 Ah ▪ weight: 8.05 kg ▪ terminal: 14 × 12 × 2 mm ▪ optimal lifetime: 5 years ▪ dimensions: 175 × 165 × 125 mm ▪ packaging: 1 pc

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

B9684

12 01 003 700

8 592920 006412

1/-/-/1

OT40-12 (E1240; E40-12)



voltage: 12 V ▪ capacity: 40 Ah ▪ weight: 13.05 kg ▪ terminal: T1 – M6 ▪ optimal lifetime: 5 years ▪ dimensions: 196 × 166 × 175 mm ▪ packaging: 1 pc

B9685

12 01 003 800

8 592920 006436

1/-/-/1

OT65-12 (E-12650)



voltage: 12 V ▪ capacity: 65 Ah ▪ weight: 20.65 kg ▪ terminal: T2 – M8 ▪ optimal lifetime: 5 years ▪ dimensions: 350 × 166 × 175 mm ▪ packaging: 1 pc

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

Battery chargers, powerbanks, USB chargers



Battery chargers

Charge 10

- thanks to the fast charging technology, it reliably charges the batteries in just 10 minutes
- will please with overheating protection or ECO mode for gentle charging of NiMH batteries
- it also has fully automatic intelligent charging and silent operation
- the charger includes 4 environmentally friendly AA batteries that last more than 700 charging cycles

- type of charger: intelligent
- charger design: separated AC cord
- power source: 100–240 V AC
- size of the charged cells: AAA, AA
- number of cells inside the package: 4
- type of cells inside the package: AA ReCyko Charge
- charging time of the enclosed cells: 00:10
- number of charging channels: 4
- number of batteries charged: 1 to 4
- charging current for AA: 10 000 mA
- charging current for AAA: 1 500 mA
- charging time AA 2 700 mAh: 0:30
- charging time AAA 1 000 mAh: 0:45
- packaging: 1 pc, small paper box





charging time · turbo charge · individual charging · auto on/off · smart diagnostics · cool power · ready to use · year storage · charging cycles

4 891199 204616

B56499	1/-/6/12
16 04 849 120	S491

- chemical constitution: NiMH
- type: HR6 (AA battery)
- voltage: 1.2 V
- capacity: 1 700 mAh
- number of charging cycles: more than 700
- dimensions: 14.5 × 50.5 mm
- weight: 26.2 g
- operating temperature: -20 °C to +50 °C
- packaging: 4 pcs, small paper box





charging cycles · ready to use · year storage

4 891199 204647

B24294	4/-/40/400
10 33 224 170	170AAHCV

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

GP Battery chargers

- unique new design concept of NiMH battery chargers
- USB power supply and small size allow you to charge anytime, anywhere
- even basic models offer quick and smart charging
- high-quality GP rechargeable batteries and micro USB cable included
- "Pro" model with LED screen and advanced features

auto on/off

smart diagnostics

charge everywhere

- type of charger: intelligent
- charger design: USB
- power source: USB 5 V/1 A
- size of the charged cells: AAA, AA
- number of cells inside the package: 4
- type of cells inside the package: AA ReCyko 2 700
- charging time of the enclosed cells: 2:45 - 5:30
- number of charging channels: 4
- number of batteries charged: 1 to 4
- charging current for AA: 1 100–550 mA
- charging current for AAA: 730–370 mA
- charging time AA 2 700 mAh: 2:45 - 5:30
- charging time AAA 1 000 mAh: 1:30 - 3:30
- packaging: 1 pc, small paper box

4 hrs charging time · individual charging · ready to use · super strong · 10 year storage





4 891199 195075

B53457 1/-/6/12

16 04 845 112 M451

- type of charger: intelligent
- charger design: USB
- power source: USB 5 V/1 A
- size of the charged cells: AAA, AA
- number of cells inside the package: 4
- type of cells inside the package: AA ReCyko Pro
- charging time of the enclosed cells: 2:00 - 4:00
- number of charging channels: 4
- number of batteries charged: 1 to 4
- charging current for AA: 1 100–550 mA
- charging current for AAA: 730–370 mA
- charging time AA 2 700 mAh: 2:45 - 5:30
- charging time AAA 1 000 mAh: 1:30 - 3:30
- packaging: 1 pc, small paper box

4 hrs charging time · individual charging · ready to use · energy lock · 5 years storage





4 891199 198335

B53455 1/-/6/12

16 04 845 111 M451

- type of charger: intelligent
- charger design: USB
- power source: USB 5 V/1 A
- size of the charged cells: AAA, AA
- number of charging channels: 4
- number of batteries charged: 1 to 4
- charging current for AA: 1 100–550 mA
- charging current for AAA: 730–370 mA
- charging time AA 2 700 mAh: 2:45 - 5:30
- charging time AAA 1 000 mAh: 1:30 - 3:30
- packaging: 1 pc, small paper box

4 hrs charging time · individual charging





4 891199 198304

B53450 1/-/6/12

16 04 845 110 M451

- type of charger: intelligent
- charger design: USB
- power source: USB 5 V/1 A
- size of the charged cells: AAA, AA
- number of cells inside the package: 2
- type of cells inside the package: AA ReCyko 2 100
- charging time of the enclosed cells: 8:00
- number of charging channels: 1
- number of batteries charged: 2
- charging current for AA: 300 mA
- charging current for AAA: 300 mA
- charging time AA 2 700 mAh: 10:00
- charging time AAA 1 000 mAh: 4:00
- packaging: 1 pc, small paper box

8 hrs charging time · ready to use · 10 year storage · 300 charging cycles





4 891199 192890

B51214 1/-/-/12

16 04 821 110 E211

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- type of charger: intelligent
- charger design: USB
- power source: USB 5 V/1 A
- size of the charged cells: AAA, AA
- number of cells inside the package: 2
- type of cells inside the package: AA ReCyko 2 100
- charging time of the enclosed cells: 8:00
- number of charging channels: 1
- number of batteries charged: 2

- charging current for AA: 300 mA
- charging current for AAA: 300 mA
- charging time AA 2 700 mAh: 10:00
- charging time AAA 1 000 mAh: 4:00
- packaging: 1 pc, small paper box





8 hrs charging time | ready to use | 1 year storage | 500 charging cycles

4 891199 213199

B50224 1/-/-/12

16 04 822 110 E221

- type of charger: intelligent
- charger design: USB
- power source: USB 5 V/1 A
- size of the charged cells: AAA, AA
- number of cells inside the package: 4
- type of cells inside the package: AA Recharge 1300,
- charging time of the enclosed cells: 2:00 - 4:00
- number of charging channels: 2
- number of batteries charged: 2 or 4

- charging current for AA: 770 mA/380 mA
- charging current for AAA: 300 mA
- charging time AA 2 700 mAh: 4:00 - 8:00
- charging time AAA 1 000 mAh: 4:00
- packaging: 1 pc, small paper box





6 hrs charging time | ready to use | 1 year storage | 500 charging cycles

4 891199 228711

B50449 1/-/-/12

16 04 844 100 B441

- type of charger: intelligent
- charger design: USB
- power source: USB 5 V/1 A
- size of the charged cells: AAA, AA
- number of cells inside the package: 4
- type of cells inside the package: AA ReCyko 2 100
- charging time of the enclosed cells: 3:00/6:00
- number of charging channels: 2
- number of batteries charged: 2 or 4

- charging current for AA: 770 mA/380 mA
- charging current for AAA: 300 mA
- charging time AA 2 700 mAh: 4:00 - 8:00
- charging time AAA 1 000 mAh: 2:30 - 3:30
- packaging: 1 pc, small paper box





6 hrs charging time | ready to use | 1 year storage | 500 charging cycles

4 891199 213212

B50444 1/-/-/12

16 04 844 110 B441

- type of charger: intelligent
- charger design: USB
- power source: USB 5 V/1 A
- size of the charged cells: AAA, AA
- number of cells inside the package: 4
- type of cells inside the package: AA ReCyko Pro
- charging time of the enclosed cells: 2:45 - 5:30
- number of charging channels: 4
- number of batteries charged: 1 to 4

- charging current for AA: 1 100–550 mA
- charging current for AAA: 730–370 mA
- charging time AA 2 700 mAh: 2:45 - 5:30
- charging time AAA 1 000 mAh: 1:30 - 3:30
- packaging: 1 pc, small paper box





6 hrs charging time | ready to use | 1 year storage

4 891199 213281

B50457 1/-/6/12

16 04 845 210 M452

- type of charger: intelligent
- charger design: USB
- power source: USB 5 V/2 A
- size of the charged cells: AAA, AA
- special features: capacity check, docking station
- number of cells inside the package: 4
- type of cells inside the package: AA ReCyko Pro
- charging time of the enclosed cells: 1:20 - 2:40
- number of charging channels: 4

- number of batteries charged: 1 to 4
- charging current for AA: 1 730 mA/ 870 mA
- charging current for AAA: 700 mA/350 mA
- charging time AA 2 700 mAh: 1:45/3:30
- charging time AAA 1 000 mAh: 1:30 - 3:15
- packaging: 1 pc, small paper box





2.5 hrs charging time | ready to use | 1 year storage

4 891199 213328

B50460D 1/-/6/12

16 04 846 114 P461

- type of charger: intelligent
- charger design: USB
- power source: USB 5 V/1 A
- size of the charged cells: AAA, AA
- number of cells inside the package: 8
- type of cells inside the package: AA ReCyko 2 100, A
- charging time of the enclosed cells: 9:00
- number of charging channels: 4
- number of batteries charged: 2, 4, 6 or 8
- charging current for AA: 250 mA
- charging current for AAA: 250 mA
- charging time AA 2 700 mAh: 10:00
- charging time AAA 1 000 mAh: 5:00
- packaging: 1 pc, small paper box





10 min charging time · ready to use · 1 year storage

4 891199 213236

B50829 1/-/-/12

16 04 882 110 E821

EMOS Battery chargers

- for carefree charging of consumer NiMH batteries
- automatic start and end of charging
- capable of charging any number and size of batteries at the same time
- smart diagnostics and management of the charging process
- high final level of charge of the batteries
- other eco-friendly and safety features
- colour LEDs indicate the state of charge

- type of charger: intelligent
- charger design: USB
- power source: USB 5 V/2 A
- size of the charged cells: 10440 – 26650, AAA, AA, C
- special features: capacity check
- number of charging channels: 2
- number of batteries charged: 1 or 2
- charging current for AA: 1 000 mA
- charging current for AAA: 1 000 mA
- charging current for C: 1 000 mA
- charging time AA 2 700 mAh: 3:00
- charging time AAA 1 000 mAh: 1:15
- packaging: 1 pc, small paper box





2 hrs Quick charge · 1 000 mA · Battery health care · Li-ion, LiFePO4, NiMH · Individual charging · Worry-free charging · Capacity check · Cool power

8 592920 092361

N9221 1/-/-/60

16 03 026 000 BCL-20D

- type of charger: intelligent
- charger design: USB
- power source: USB 5 V/1 A
- size of the charged cells: AAA, AA
- number of charging channels: 4
- number of batteries charged: 1 to 4
- charging current for AA: 300 mA
- charging current for AAA: 300 mA
- charging time AA 2 700 mAh: 10:00
- charging time AAA 1 000 mAh: 4:00
- packaging: 1 pc, small paper box





7 hrs Charging time · 300 mA · AA, AAA · Individual charging · Worry-free charging

8 592920 109991

N9321 1/-/-/60

16 03 027 000 BCN-40

- type of charger: intelligent
- charger design: USB
- power source: USB 5 V/1 A
- size of the charged cells: AAA, AA
- number of cells inside the package: 4
- type of cells inside the package: AA NiMH 2 700
- charging time of the enclosed cells: 4:00
- number of charging channels: 4
- number of batteries charged: 1 to 4
- charging current for AA: 1 000/500 mA
- charging current for AAA: 1 000/500 mA
- charging time AA 2 700 mAh: 3:00 - 4:00
- charging time AAA 1 000 mAh: 1:15 - 2:00
- packaging: 1 pc, small paper box





3 hrs Charging time · 1 000/500 mA · Dual speed charging · AA, AAA · Individual charging · Worry-free charging

8 592920 110010

N9331 1/-/-/60

16 03 028 000 BCN-41D

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- type of charger: intelligent
- charger design: USB
- power source: USB 5 V/1 A
- size of the charged cells: AAA, AA
- special features: capacity check
- number of cells inside the package: 4
- type of cells inside the package: AA NiMH 2 700
- charging time of the enclosed cells: 3:00
- number of charging channels: 4
- number of batteries charged: 1 to 4
- charging current for AA: 1 000–250 mA
- charging current for AAA: 1 000–250 mA
- charging time AA 2 700 mAh: 3:00 - 12:00
- charging time AAA 1 000 mAh: 1:15 - 5:00
- packaging: 1 pc, small paper box





2 hrs Quick charge | 1 000 mA | Battery health care | AA, AAA | Individual charging | Worry-free charging | Capacity check | Cool power | Optional speed charging

8 592920 110034

N9341 | 1/-/-/40

16 03 029 000 | BCN-42D

- type of charger: intelligent
- charger design: USB
- power source: USB 5 V/2 A
- size of the charged cells: AAA, AA, C, D, 9 V
- number of charging channels: 7
- number of batteries charged: 1 to 6
- charging current for AA: 500 mA
- charging current for AAA: 500 mA
- charging current for C: 500 mA
- charging current for D: 500 mA
- charging current for 9 V: 30 mA
- charging time AA 2 700 mAh: 6:30
- charging time AAA 1 000 mAh: 2:30
- packaging: 1 pc, small paper box





4 hrs Charging time | 500 mA | AA, AAA C, D, 9 V | Individual charging | Worry-free charging

8 592920 109984

N9361 | 1/-/-/30

16 03 030 000 | BCN-60U

Powerbanks

GP Powerbanks

- 7 electronic safety protection features
- Specific models have wireless charging possibility
- All models are able to charge more devices simultaneously
- All models are capable of Light Load charging (for smart-watches, headphones)
- All models are equipped with LED Display or LED indication (MagSafe Wireless model)
- Passthrough function, auto On/Off

- battery capacity: 5 000 mAh/18.5 Wh
- battery type: Li-Po 3.7 V
- fast charging: PD 20 W
- max.input power: 18 W
- type of input interface: 1× USB-C
- charging time: 2 hours
- max.output power: 20 W
- type of output interface: 1× USB-C
- cable included: USB-C/USB-C
- LED charging indicator
- LED battery status indicator
- auto ON/OFF
- passthrough
- material: ABS plastic
- colour: black
- weight: 150 g
- dimensions: 111 × 63 × 18,5 mm





4 891199 224379

B6305B | 1/-/2/20

16 11 630 500 | Q05B

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- battery capacity: 10 000 mAh/37 Wh
- battery type: Li-Po 3.7 V
- fast charging: PD 3.0, QC 3.0, PPS, SCP, FCP, AFC
- max.input power: 18 W
- type of input interface: 1× USB-C
- charging time: 2.5 hours
- max.output power: 22.5 W
- type of output interface: 2× USB-C, 1× USB-A
- cable included: USB-A/USB-C

- LED charging indicator
- LED battery status indicator
- passthrough
- material: ABS plastic
- colour: green
- weight: 240 g
- dimensions: 142 × 67 × 16 mm





4 891199 224256

B6310G
16 11 631 000

1/-/2/20
GPM10CGR

- battery capacity: 10 000 mAh/37 Wh
- battery type: Li-Po 3.7 V
- fast charging: PD 3.0, QC 3.0, PPS, SCP, FCP, AFC
- max.input power: 18 W
- type of input interface: 1× USB-C
- charging time: 2.5 hours
- max.output power: 22.5 W
- type of output interface: 2× USB-C, 1× USB-A
- cable included: USB-A/USB-C

- LED charging indicator
- LED battery status indicator
- passthrough
- material: ABS plastic
- colour: blue
- weight: 240 g
- dimensions: 142 × 67 × 16 mm





4 891199 224263

B6310BL
16 11 631 001

1/-/2/20
GPM10CBL

- battery capacity: 10 000 mAh/37 Wh
- battery type: Li-Po 3.7 V
- fast charging: PD 20 W + SCP 22.5 W + Dash + War
- max.input power: 18 W
- type of input interface: 1× USB-C
- charging time: 2.5 hours
- max.output power: 22.5 W
- type of output interface: 2× USB-C, 1× USB-A
- cable included: USB-A/USB-C

- LED charging indicator
- LED battery status indicator
- passthrough
- material: ABS plastic
- colour: beige
- weight: 240 g
- dimensions: 142 × 67 × 16 mm





4 891199 224270

B6310BE
16 11 631 002

1/-/2/20
GPM10CBE

- battery capacity: 20 000 mAh/74 Wh
- battery type: Li-Po 3.7 V
- fast charging: PD 3.0, QC 3.0, PPS, SCP, FCP, AFC
- max.input power: 18 W
- type of input interface: 1× USB-C
- charging time: 5 hours
- max.output power: 22.5 W
- type of output interface: 2× USB-C, 1× USB-A
- cable included: USB-A/USB-C

- LED charging indicator
- LED battery status indicator
- passthrough
- material: ABS plastic
- colour: grey
- weight: 390 g
- dimensions: 146 × 68 × 29 mm





4 891199 224287

B6320GY
16 11 632 000

1/-/2/20
GPM20CGY

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

EMOS Powerbanks

- all models are compatible with USB-C or micro USB devices
- 6 electronic safety protection features
- cables with data transfer function are included
- certain models are featured with quick charge QC3.0 and PD18W
- excellent performance thanks to used high-quality battery and el.
- passthrough function, auto ON/OFF







- battery capacity: 5 000 mAh/18.5 Wh
- battery type: Li-Po 3.85 V
- fast charging: PD 20 W
- max.input power: 18 W
- type of input interface: 1× USB-C
- charging time: 2 hours
- max.output power: 20 W
- type of output interface: 1× USB-C
- cable included: USB-C/USB-C

- LED charging indicator
- LED battery status indicator
- auto ON/OFF
- passthrough
- material: ABS plastic
- colour: black
- weight: 118 g
- dimensions: 103 × 68 × 13 mm



















8 592920 131695

B0545B
16 13 054 500

1/-/-/28
WI 521

- battery capacity: 10 000 mAh/38.5 Wh
- battery type: Li-Po 3.85 V
- fast charging: PD 20 W + SCP 22.5 W + Dash + War
- max.input power: 18 W
- type of input interface: 1× USB-C
- charging time: 4 hours (with QC)
- max.output power: 22.5 W
- type of output interface: 1× USB-A, 1× USB-C
- cable included: USB-A/USB-C, data

- LED charging indicator
- LED battery status indicator
- auto ON/OFF
- passthrough
- material: ABS plastic
- colour: black
- weight: 186 g
- dimensions: 109 × 68 × 20 mm





















8 592920 119853

B0543B
16 13 054 300

1/-/-/28
WI 1023D

- battery capacity: 10 000 mAh/37 Wh
- battery type: Li-Po 3.7 V
- fast charging: PD 20 W + SCP 22.5 W + Dash + War
- max.input power: 18 W
- type of input interface: 1× micro USB, 1× USB-C
- charging time: 4 hours
- max.output power: 22.5 W
- type of output interface: 2× USB-A, 1× USB-C
- cable included: USB-A/USB-C, data

- LED charging indicator
- LED battery status indicator
- auto ON/OFF
- passthrough
- material: ABS plastic
- colour: black
- weight: 233 g
- dimensions: 143 × 68 × 16 mm





















8 592920 124772

B0531B
16 13 053 100

1/-/-/20
BETAQ 10

- battery capacity: 20 000 mAh/74 Wh
- battery type: Li-Po 3.7 V
- fast charging: PD 20 W + SCP 22.5 W + Dash + War
- max.input power: 18 W
- type of input interface: 1× micro USB, 1× USB-C
- charging time: 7 hours (with QC)
- max.output power: 22.5 W
- type of output interface: 2× USB-A, 1× USB-C
- cable included: USB-A/USB-C, data

- LED charging indicator
- LED battery status indicator
- auto ON/OFF
- passthrough
- material: ABS plastic
- colour: black
- weight: 409 g
- dimensions: 143 × 68 × 28 mm

















8 592920 124796

B0532B
16 13 053 200

1/-/-/12
BETAQ 20

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- battery capacity: 10 000 mAh/37 Wh
- battery type: Li-Po 3.7 V
- fast charging: no
- max.input power: 10 W
- type of input interface: micro USB
- charging time: 6 hours
- max.output power: 10,5 W
- type of output interface: 2× USB-A
- cable included: micro USB, USB-C, data
- LED charging indicator
- LED battery status indicator
- auto ON/OFF
- passthrough
- material: ABS plastic
- colour: black
- weight: 220 g
- dimensions: 138 × 68 × 16 mm





10 W | 10 000 mAh | 2× USB-A output | LED indication

8 592920 084083

B0526B | 1/-/-/28

16 13 052 600 | ALPHA 10S

- battery capacity: 20 000 mAh/74 Wh
- battery type: Li-Po 3.7 V
- fast charging: no
- max.input power: 10 W
- type of input interface: 1× micro USB, 1× USB-C
- charging time: 12 hours
- max.output power: 10 W
- type of output interface: 2× USB-A, 1× USB-C
- cable included: USB-A/USB-C, data
- LED charging indicator
- LED battery status indicator
- auto ON/OFF
- passthrough
- material: ABS plastic
- colour: black
- weight: 412 g
- dimensions: 142 × 67 × 27 mm





10 W | 20 000 mAh | 1× USB-C output | 2× USB-A output | LED indication

8 592920 109847

B0527B | 1/-/-/24

16 13 052 700 | ALPHA2 20 000

USB chargers

- faster charging than via USB port on laptop
- USB adapters for standard socket or car with 1–4 USB ports
- smart functions for fast charging and device protection
- minimum energy losses during transfer
- BASIC–Economy line of high-quality chargers
- SMART–Higher current allows charging multiple devices at once
- QUICK–Quick charging for devices with Qualcomm processors

---

max. output 1× USB: 5 V/2.1 A/10.5 W ▪ max. output total: 5 V/3.1 A/15.5 W ▪ input voltage: 100–240 V~ 50/60 Hz ▪ charging: smart ▪ number of USB outputs: 2 ▪ protection against overload, overvoltage and short circuit ▪ designed for: smartphone, tablet ▪ dimensions: 80 × 39 × 27 mm ▪ packaging: 1 pc, blister





Smart Charge | IN 100–240 V | Smartphone | Tablet | 2× USB 3.1 A max.

8 592920 117408

V0125 | 1/-/4/36

17 04 012 500 | V0125

---

max. output 1× USB: QC 3.0-2.0 (5–12 V/1.5–3.0 A/18 W) ▪ max. output total: QC 3.0–2.0 (5–12 V/1.5–3.0 A/18 W) ▪ input voltage: 100–240 V~ 50/60 Hz ▪ charging: quick ▪ number of USB outputs: 1 ▪ protection against overload, overvoltage and short circuit ▪ designed for: smartphone, tablet ▪ dimensions: 87 × 44 × 25 mm ▪ packaging: 1 pc, blister





Quick Charge | IN 100–240 V | Smartphone | Tablet | USB 1.5–3 A max. | Quick Charge

8 592920 117415

V0123 | 1/-/-/50

17 04 012 300 | V0123

EMOS
A brand of legrand

www.emos.eu

Order Code / Item Number | Packaging Type

max. output 1× USB: 5 V/1 A/5 W ▪ max. output total: 5 V/1 A/5 W ▪ input voltage: 100–240 V~ 50/60 Hz ▪ charging: basic ▪ number of USB outputs: 1 ▪ protection against overload, overvoltage and short circuit ▪ designed for: smartphone ▪ dimensions: 78 × 34 × 21 mm ▪ packaging: 1 pc, blister





Basic Charge | IN 100–240 V | Smartphone | USB 1 A max.

8 592920 107539

V0122 | 1/-/25/50

17 04 012 200 | V0122

---

max. output 1× USB: QC 3.0–2.0, PD (5–12 V/1,5–3,0 A/18 W) ▪ max. output total: QC 3.0–2.0, PD (5–12 V/1,5–3,0 A/30 W) ▪ input voltage: 100–240 V~ 50/60 Hz ▪ charging: quick ▪ number of USB outputs: 2 ▪ protection against overload, overvoltage and short circuit ▪ designed for: smartphone, tablet ▪ dimensions: 91 × 54 × 27 mm ▪ packaging: 1 pc, blister





Quick Charge | IN 100–240 V | Smartphone | Tablet | 2× USB 3.1 A max. | Quick Charge

8 592920 080283

V0120 | 1/-/-/56

17 04 012 000 | V0120

---

max. output 1× USB: 5 V/2.1 A/10.5 W ▪ max. output total: 5 V/2.1 A/10.5 W ▪ input voltage: 12–24 V DC ▪ charging: basic ▪ number of USB outputs: 1 ▪ protection against overload, overvoltage and short circuit ▪ designed for: smartphone, tablet ▪ LED indicators ▪ power supply type: micro USB cable 1 m, USB-C reduction in packaging ▪ dimensions: 65 × 28 × 28 mm ▪ packaging: 1 pc, blister





Basic Charge | Smartphone | Tablet | USB 2.1 A max.

8 592920 067123

V0219 | 1/-/-/25

17 04 021 900 | V0219

Universal adaptors

- EMOS adapters come with a set of replaceable connectors
- SMPS suitable for light-current devices (torches, antennas)

---

max. output 1× USB: 5 V/2.0 A/10 W ▪ max. output total: 5 V/2.0 A/10 W ▪ input voltage: 100–240 V~ 50/60 Hz ▪ number of USB outputs: 1 ▪ protection against overload, overvoltage and short circuit ▪ designed for: universal ▪ LED indicators ▪ output voltage: 3 V, 4.5 V, 5 V, 6 V, 7.5 V, 9 V, 12 V ▪ output current: max. 2 250 mA ▪ size of the connector: B 3.5/15; C 3.0×1.0/10; D 5.0×2.1/12; G 5.5×2.5/10; H 3.5×1.35/10; I 4×1.7/10; S 2.35×0.75/8.7 ▪ power supply type: cable + set of DC connectors + USB out ▪ dimensions: 50 × 80 × 32 mm ▪ packaging: 1 pc, blister





2 250 mA max. | OUT 3–12 V | IN 100–240 V | USB OUT

8 592920 064115

N3113 | 1/-/-/24

17 03 225 021 | N3113

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

max. output 1× USB: 5 V/2.0 A/10 W ▪ max. output total: 5 V/2.0 A/10 W ▪ input voltage: 100–240 V~ 50/60 Hz ▪ number of USB outputs: 1 ▪ protection against overload, overvoltage and short circuit ▪ designed for: universal ▪ LED indicators ▪ output voltage: 3 V, 4.5 V, 5 V, 6 V, 7.5 V, 9 V, 12 V ▪ output current: max. 1 500 mA ▪ size of the connector: B 3.5/15; C 3.0×1.0/10; D 5.0×2.1/12; G 5.5×2.5/10; H 3.5×1.35/10; I 4×1.7/10; S 2.35×0.75/8.7 ▪ power supply type: cable + set of DC connectors + USB out ▪ dimensions: 50 × 80 × 32 mm ▪ packaging: 1 pc, blister





1 500 mA max. | OUT 3–12 V | IN 100–240 V | USB OUT

8 592920 064092

N3112 1/-/-/24

17 03 150 021 N3112

---

max. output 1× USB: 5 V/2.0 A/10 W ▪ max. output total: 5 V/2.0 A/10 W ▪ input voltage: 100–240 V~ 50/60 Hz ▪ number of USB outputs: 1 ▪ protection against overload, overvoltage and short circuit ▪ designed for: universal ▪ LED indicators ▪ output voltage: 3 V, 4.5 V, 5 V, 6 V, 7.5 V, 9 V, 12 V ▪ output current: max. 1 000 mA ▪ size of the connector: B 3.5/15; C 3.0×1.0/10; D 5.0×2.1/12; G 5.5×2.5/10; H 3.5×1.35/10; I 4×1.7/10; S 2.35×0.75/8.7 ▪ power supply type: cable + set of DC connectors + USB out ▪ dimensions: 50 × 80 × 32 mm ▪ packaging: 1 pc, blister





1 000 mA max. | OUT 3–12 V | IN 100–240 V | USB OUT

8 592920 064078

N3111 1/-/-/24

17 03 100 021 N3111

---

input voltage: 100–240 V~ 50/60 Hz ▪ protection against overload, overvoltage and short circuit ▪ designed for: universal ▪ LED indicators ▪ output voltage: 3 V, 4.5 V, 5 V, 6 V, 7.5 V, 9 V, 12 V ▪ output current: max. 600 mA ▪ size of the connector: B 3.5/15; C 3.0×1.0/10; D 5.0×2.1/12; G 5.5×2.5/10; H 3.5×1.35/10; I 4×1.7/10; S 2.35×0.75/8.7 ▪ power supply type: cable + set of DC connectors ▪ dimensions: 36 × 66 × 30 mm ▪ packaging: 1 pc, blister





600 mA max. | OUT 3–12 V | IN 100–240 V

8 592920 064054

N3110 1/-/-/20

17 03 060 021 N3110

Car battery chargers, testers

- for charging car batteries and other accumulators
- with voltage of 6 or 12 V and capacity of 1.2–120 Ah
- diagnoses type of connected battery, auto-selects programme
- adapts charging speed and intensity to ambient temperature
- non-stop connection extends battery life in rarely-used cars
- restores slightly damaged accumulators to original condition
- with short-circuit and reversed polarity protection

---

designed for: cars, motorcycles, backup batteries, lead acid battery WET (acid), MF (Maintenance Free), VRLA, AGM and GEL ▪ charging: 6 V (1.2 Ah–14 Ah), 12 V (1.2 Ah–120 Ah) ▪ charging cable: 1.8 m is terminated by clips ▪ disfultation mode ▪ sustaining mode ▪ cold weather program ▪ protection against short circuit and reverse polarity ▪ entrance: 220–240 V AC/50 Hz/600 mA ▪ IP rating: IP65 ▪ packaging: 1 pc, box





IP65 | 6/12 V 4 A max. | 1.8 m | 1.2–120 Ah | 1.2–120 Ah | Reverse polarity protection

AGM GEL

8 592920 017395

N1014 1/-/-/12

16 06 025 000 EE04A

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

designed for: cars, motorbikes, backup accumulator, SLA battery WET (acid), MF (maintenance-free), VRLA, AGM + GEL and 12.8 V LiFePO4 ▪ charging: 6 V (1.2 Ah–30 Ah), 12 V (1.2 Ah–30 Ah); 12.8 V LiFePO4 (2 Ah–15 Ah) ▪ charging cable: 1.8 m is terminated by clips ▪ disfultation mode ▪ sustaining mode ▪ protection against short circuit and reverse polarity ▪ entrance: 220–240 V AC/50 Hz/300 mA ▪ IP rating: IP65 (charger cover) ▪ packaging: 1 pc, box





IP65 | 6/12 V 0.8 A max. | 1.8 m | 1.2–120 Ah | 1.2–120 Ah | Reverse polarity protection

AGM GEL

8 592920 049686

N1015

16 08 000 001

1/-/-/20

E-CC008A

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

Portable Lighting



GP

Flashlights

GP Discovery

- quality all-metal GP torches for daily use
- powerful yet efficient LED chips (CREE LED in some models)
- compatible with alkaline and rechargeable batteries
- anti-scratch surface finish
- water-resistance up to IPX7 (CR41 usable briefly underwater)

- source of light: CREE SMD LED
- maximal light output: 650 lm
- maximal beam distance: 135 m
- number of lighting modes: 4
- runtime: 5.5–40 hrs
- focus
- impact resistance: 1 m
- waterproof: IPX7
- rechargeable

- battery: Li-Ion
- battery type: 18650/3,7 V/2 550 mAh
- batteries included
- recharge time: 3 hrs
- power connector type: micro USB
- features: textile loop
- dimensions: 33 × 136 mm
- weight: 179 g
- packaging: 1 pc, small paper box





650 LUMENS · 135 m · 40 h · IPX7 · 1 m · 179 g · 1× 18650 · Alu · ANTI-SLIP BODY · rechargeable

4 891199 183935

P8511	1/-/-/12
14 51 704 100	CR41

- source of light: CREE SMD LED
- maximal light output: 300 lm
- maximal beam distance: 100 m
- number of lighting modes: 3
- runtime: 4.5–15 hrs
- focus
- impact resistance: 1 m
- waterproof: IPX4
- rechargeable: no

- battery: 3× AAA
- battery type: LR03 (1.5 V)
- batteries included
- features: textile loop
- dimensions: 32 × 108 mm
- weight: 120 g
- packaging: 1 pc, small paper box





300 LUMENS · 100 m · 15 h · IPX4 · 1 m · 120 g · 3× AAA · Alu · ANTI-SLIP BODY · focus able

4 891199 183874

P8506	1/-/-/12
14 51 703 200	C32

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- source of light: COB LED + CREE SMD LED
- maximal light output: 180 lm
- maximal beam distance: 100 m
- number of lighting modes: 3
- runtime: 2–20 hrs
- focus
- impact resistance: 1 m
- waterproof: IPX4
- rechargeable: no
- battery: 2× AA
- battery type: LR6 (1,5 V)
- batteries included
- features: magnet, metal clip
- dimensions: 26 × 165 mm
- weight: 128 g
- packaging: 1 pc, small paper box





150 LUMENS · 100 m · 20 h · IPX4 · 1 m · 128 g · 2× AA · Alu · ANTI-SLIP BODY · COB light · 4 891199 183904

P8504 | 1/-/-/12
14 51 703 300 | C33

- source of light: 1× LED
- maximal light output: 20 lm
- maximal beam distance: 25 m
- number of lighting modes: 1
- runtime: 3 hrs
- impact resistance: 1 m
- waterproof: IPX4
- rechargeable: no
- battery: 1× AAA
- battery type: LR03 (1.5 V)
- batteries included
- features: metal snap-hook
- dimensions: 18 × 89 mm
- weight: 37 g
- packaging: 1 pc, small paper box





20 LUMENS · 25 m · 3 h · IPX4 · 1 m · 37 g · 1× AAA · Alu · ANTI-SLIP BODY · lightweight · 4 891199 183645

P8502 | 1/-/12/72
14 51 701 200 | CK12

- source of light: CREE SMD LED
- maximal light output: 100 lm
- maximal beam distance: 75 m
- number of lighting modes: 2
- runtime: 2–7 hours
- impact resistance: 1 m
- waterproof: IPX4
- rechargeable: no
- battery: 1× AA
- battery type: LR6 (1,5 V)
- batteries included
- features: textile loop
- dimensions: 22.5 × 95 mm
- weight: 64 g
- packaging: 1 pc, small paper box





100 LUMENS · 75 m · IPX4 · 7 h · 1 m · 64 g · 1× AA · Alu · ANTI-SLIP BODY · 2 lighting modes · 4 891199 214479

P8507 | 1/-/-/12
14 51 703 110 | C31X

- source of light: COB LED + CREE LED
- maximal light output: 550 lm
- maximal beam distance: 110 m
- number of lighting modes: 4
- runtime: 20 hrs
- impact resistance: 1 m
- waterproof: IPX4
- rechargeable: no
- battery: 3× AA
- battery type: LR6 (1,5 V)
- batteries included
- features: magnet, metal clip
- dimensions: 27.5 × 193 mm
- weight: 217 g
- packaging: 1 pc, small paper box





550 LUMENS · 110 m · IPX4 · 30 h · 1 m · 217 g · 3× AA · Alu · ANTI-SLIP BODY · 4 lighting modes · 4 891199 190223

P8508 | 1/-/-/12
14 51 703 402 | C34

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

GP Everyday

- lightweight and compact flashlights for everyday use
- ready-made fixing for any wrist strap
- ocus on the head of the flashlight for precise light focusing
- made of durable plastic

- source of light: LED
- maximal light output: 50 lm
- maximal beam distance: 30 m
- number of lighting modes: 1
- runtime: 24 hours
- focus: yes (screwable)
- impact resistance: 1 m
- waterproof: IPX4
- rechargeable: no

- battery: 1× AA 1.5 V
- battery type: LR6 (1,5 V)
- batteries included
- features: hole for strap
- dimensions: 36 × 126 mm
- weight: 62 g
- packaging: 1 pc, blister







4 891199 222481

P8105
14 51 710 500

1/-/-/12
C105

- source of light: LED
- maximal light output: 70 lm
- maximal beam distance: 45 m
- number of lighting modes: 1
- runtime: 24 hours
- focus: yes (screwable)
- impact resistance: 1 m
- waterproof: IPX4
- rechargeable: no

- battery: 2× AA
- battery type: LR6 (1,5 V)
- batteries included
- features: hole for strap
- dimensions: 42 × 166 mm
- weight: 106 g
- packaging: 1 pc, blister







4 891199 222498

P8107
14 51 710 700

1/-/-/12
C107

GP

Headlights

GP Xplor

- ultra-light trail running headlamps
- natural part of sports and professional equipment
- quality CREE LED chips for high luminous flux: 300–500 lm
- water-resistant (IPX6) and impact-resistant (from up to 1 m)
- AAA powered or as a rechargeable version
- compatible with single-use and rechargeable batteries
- Button Lock – protects against switching on accidentally

- source of light: 3× CREE SMD LED
- maximal light output: 500 lm
- maximal beam distance: 85 m
- number of lighting modes: 10
- runtime: 60 s – 100 hrs
- focus: no
- reflective head strap
- impact resistance: 1 m
- waterproof: IPX6

- charging
- power supply: Li-Po
- battery type: Li-Po 1 600 mAh
- batteries included
- special function: button lock mode
- accessories: USB-C cable
- dimensions: 56 × 38 × 39 mm
- weight: 59.5 g
- packaging: 1 pc, small paper box





500 LUMENS | 85 m | 100 h | IPX6 | 1 m | 59 g | 1× Li-Po | 3 YEARS WARRANTY | rechargeable | spot·flood light

4 891199 203879

P8567	1/-/-/10
14 51 085 670	PHR17

- source of light: 2× CREE SMD LED
- maximal light output: 300 lm
- maximal beam distance: 50 m
- number of lighting modes: 9
- runtime: 60 s – 45 hrs
- focus: no
- reflective head strap
- impact resistance: 1 m
- waterproof: IPX6

- charging
- power supply: Li-Po
- battery type: Li-Po 800 mAh
- batteries included
- special function: button lock mode
- accessories: USB-C cable
- dimensions: 56 × 38 × 34 mm
- weight: 44 g
- packaging: 1 pc, small paper box





300 LUMENS | 50 m | 45 h | IPX6 | 1 m | 43 g | 1× Li-Po | 3 YEARS WARRANTY | rechargeable | spot·flood light

4 891199 203855

P8566	1/-/-/10
14 51 085 660	PHR16

- source of light: 2× Osram SMD LED
- maximal light output: 1 200 lm
- maximal beam distance: 110 m
- number of lighting modes: 11
- runtime: 2–100 hrs
- focus: no
- reflective head strap
- impact resistance: 1.5 m
- waterproof: IPX8

- charging
- power supply: Li-ion/2× CR123A
- battery type: 18650/3,7 V/2 550 mAh
- batteries included
- special function: button lock mode
- accessories: USB-A=>USB-C cable 30 cm
- dimensions: 91.5 × 39 × 51 mm
- weight: 90 g/151 g
- packaging: 1 pc, small paper box





1 200 LUMENS | 110 m | 100 h | IPX8 | 1.5 m | 151 g | 1× 18650 | 11 lighting modes | REFLEX

4 891199 203893

P8569	1/-/-/10
14 51 701 900	PHR19

EMOS A brand of legrand | www.emos.eu | Order Code Item Number | Packaging Type

GP Discovery

- quality all-metal GP headlamps for daily use
- powerful yet efficient LED chips (CREE LED in some models)
- compatible with alkaline and rechargeable batteries
- anti-scratch surface finish
- water-resistance up to IPX7 (CR41 usable briefly underwater)

- source of light: CREE SMD LED
- maximal light output: 600 lm
- maximal beam distance: 130 m
- number of lighting modes: 5
- runtime: 40 s – 60 hrs
- focus: no
- reflective head strap: no
- impact resistance: 1 m
- waterproof: IPX4

- charging
- power supply: Li-Ion
- battery type: 18650/3,7 V/2 550 mAh
- batteries included
- special function: button lock mode
- accessories: micro USB cable
- dimensions: 106 × 27 × 27 mm
- weight: 153 g
- packaging: 1 pc, small paper box





600 LUMENS · 130 m · 60 h · IPX4 · 1 m · 153 g · 1× 18650 · Alu · anti-slip body · rechargeable · 4 891199 190131

P8555 | 1/-/-/10
14 51 703 500 | CHR35

- source of light: CREE SMD LED
- maximal light output: 300 lm
- maximal beam distance: 157 m
- number of lighting modes: 4
- runtime: 5–69 hrs
- focus: no
- reflective head strap: no
- impact resistance: 1 m
- waterproof: IPX6

- charging
- power supply: 3× AAA
- battery type: HR03 (1.5 V)
- batteries included
- special function: auto-dimming mode, button lock m
- accessories: micro USB cable
- dimensions: 34 × 46 × 56 mm
- weight: 110 g
- packaging: 1 pc, small paper box





300 LUMENS · 157 m · 69 h · IPX6 · 1 m · 110 g · 3× AAA · 3 YEARS WARRANTY · rechargeable · auto dimming · 4 891199 205200

P8572 | 1/-/6/24
14 51 704 101 | CHR41

- source of light: CREE SMD LED
- maximal light output: 300 lm
- maximal beam distance: 157 m
- number of lighting modes: 4
- runtime: 5–69 hrs
- focus: no
- reflective head strap: no
- impact resistance: 1 m
- waterproof: IPX6

- charging: no
- power supply: 3× AAA
- battery type: LR03 (1.5 V)
- batteries included
- special function: touchless dimming
- dimensions: 34 × 46 × 56 mm
- weight: 110 g
- packaging: 1 pc, small paper box





300 LUMENS · 157 m · 69 h · IPX6 · 1 m · 110 g · 3× AAA · 3 YEARS WARRANTY · Touchless control · 4 lighting modes · 4 891199 205187

P8571 | 1/-/6/24
14 51 704 600 | CH46

- source of light: 4× LED
- maximal light output: 40 lm
- maximal beam distance: 8 m
- number of lighting modes: 3
- runtime: 2–6 hrs
- focus: no
- reflective head strap: no
- impact resistance: 1 m
- waterproof: no

- charging: no
- power supply: 2× CR2025
- batteries included
- dimensions: 37 × 36 × 20 mm
- weight: 31 g
- packaging: 1 pc, blister





40 LUMENS · 8 m · 6 h · IP20 · 1 m · 31 g · 2× CR2025 · lightweight · 3 lighting modes · impact resistant · 4 891199 183416

P8551P | 1/-/-/12
14 51 703 102 | CH31

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- source of light: 2× SMD LED
- maximal light output: 110 lm
- maximal beam distance: 40 m
- number of lighting modes: 4
- runtime: 15 hours
- focus: no
- reflective head strap: no
- impact resistance: 1 m
- waterproof: IP43
- charging: no
- power supply: 3× AAA
- battery type: LR03 (1.5 V)
- batteries included
- dimensions: 59 × 46 × 34 mm
- weight: 29 g/65 g
- packaging: 1 pc, small paper box





110 LUMENS | 40 m | 15 h | IP43 | 1 m | 65 g | 3× AAA | spot·flood light | 4 lighting modes | impact resistant | 4 891199 210990

P8582 | 1/-/-/10
14 51 704 200 | CH42

- source of light: 2× SMD LED + LED
- maximal light output: 150 lm
- maximal beam distance: 45 m
- number of lighting modes: 5
- runtime: 36 hours
- focus: no
- reflective head strap: no
- impact resistance: 1 m
- waterproof: IPX4
- charging: no
- power supply: 3× AAA
- battery type: LR03 (1.5 V)
- batteries included
- dimensions: 61 × 47 × 37 mm
- weight: 42 g/78 g
- packaging: 1 pc, small paper box





150 LUMENS | 45 m | 36 h | IPX4 | 1 m | 78 g | 3× AAA | spot·flood light | red light | 5 lighting modes | 4 891199 211027

P8583 | 1/-/-/10
14 51 704 300 | CH43

- source of light: 2× SMD LED
- maximal light output: 300 lm
- maximal beam distance: 60 m
- number of lighting modes: 6
- runtime: 36 hours
- focus: no
- reflective head strap: no
- impact resistance: 1 m
- waterproof: IPX4
- charging: no
- power supply: 3× AAA
- battery type: LR03 (1.5 V)
- batteries included
- special function: touchless control
- dimensions: 61 × 47 × 37 mm
- weight: 42 g/78 g
- packaging: 1 pc, small paper box





300 LUMENS | 60 m | 36 h | IPX4 | 1 m | 78 g | 3× AAA | Touchless control | spot·flood light | red light | 4 891199 211058

P8584 | 1/-/-/10
14 51 704 400 | CH44

- source of light: 2× CREE SMD LED
- maximal light output: 280 lm
- maximal beam distance: 90 m
- number of lighting modes: 6
- runtime: 25 hours
- focus: no
- reflective head strap: no
- impact resistance: 5 m
- waterproof: IPX5
- charging: no
- power supply: 3× AAA
- battery type: LR03 (1.5 V)
- batteries included
- dimensions: 66 × 49 × 37 mm
- weight: 95 g
- packaging: 1 pc, small paper box





280 LUMENS | 90 m | 25 h | IPX5 | 5 m | 98 g | 3× AAA | 3 YEARS WARRANTY | spot·flood light | red light | 4 891199 211089

P8573 | 1/-/-/10
14 51 705 300 | CHW53

- source of light: 2× CREE SMD LED
- maximal light output: 375 lm
- maximal beam distance: 110 m
- number of lighting modes: 4
- runtime: 26 hours
- focus: no
- reflective head strap: no
- impact resistance: 5 m
- waterproof: IPX5
- charging: no
- power supply: 3× AAA
- battery type: LR03 (1.5 V)
- batteries included
- special function: touchless dimming
- dimensions: 66 × 49 × 37 mm
- weight: 62 g/98 g
- packaging: 1 pc, small paper box





375 LUMENS | 110 m | 26 h | IPX5 | 5 m | 98 g | 3× AAA | 3 YEARS WARRANTY | spot·flood light | Touchless control | 4 891199 211119

P8574 | 1/-/-/10
14 51 705 400 | CHW54

EMOS

LED Metal Flashlights

ULTIBRIGHT Flashlights

ULTIBRIGHT

- ULTIBRIGHT premium flashlights – compact, durable and reliable
- distinguished by an elegant red ring
- designer flashlights made of durable metal
- reliably withstand impact from falling onto a hard surface
- extraordinary luminous flux and beam distance thanks to a brand-name CREE LED chip
- easy to keep on hand thanks to their compact size practical clip and reliable strap

- source of light: CREE LED
- maximal light output: 1 200 lm
- maximal beam distance: 280 m
- number of lighting modes: 3
- runtime: 3–11 hrs
- focus: yes (screwable)
- impact resistance
- waterproof: yes (IP65)
- rechargeable

- battery: Li-Ion 26650
- battery type: 5 000 mAh/3.7 V
- batteries included
- recharge time: 11.5 hrs
- power connector type: USB C
- features: hand strap
- dimensions: 157 × 40 × 40 mm
- weight: 198 g (without battery)
- packaging: 1 pc, box

LED | 1 200 lm | 280 m | Water resistance

Rechargeable | 3 lighting modes | Recharge battery protection | 3 YEARS WARRANTY





8 592920 089798

P3190 | 1/-/4/16

14 50 000 340 | P3190

- source of light: CREE LED
- maximal light output: 600 lm
- maximal beam distance: 230 m
- number of lighting modes: 3
- runtime: 3.5–12 hrs
- focus: yes (screwable)
- impact resistance
- waterproof: yes (IP65)
- rechargeable

- battery: Li-Ion 18650
- battery type: 2 600 mAh/3.7 V
- batteries included
- recharge time: 4.5 hrs
- power connector type: USB C
- features: hand strap
- dimensions: 151 × 34 × 34 mm
- weight: 189 g
- packaging: 1 pc, box

LED | 600 lm | 230 m | Water resistance

Rechargeable | 3 lighting modes | Recharge battery protection | 3 YEARS WARRANTY





8 592920 089767

P3180 | 1/-/4/16

14 50 000 330 | P3180

- source of light: CREE LED
- maximal light output: 340 lm
- maximal beam distance: 200 m
- number of lighting modes: 2
- runtime: 3–5,5 hrs
- focus: yes (screwable)
- impact resistance
- waterproof: yes (IP65)
- rechargeable: no

- battery: 3× AAA
- battery type: LR03 (1.5 V)
- batteries included: no
- features: clip, loop
- dimensions: 124 × 34 × 34 mm
- weight: 112 g
- packaging: 1 pc, box

LED | 340 lm | 200 m | Water resistance

3× AAA | 2 lighting modes | 3 YEARS WARRANTY





8 592920 089736

P3170 | 1/-/4/16

14 40 013 123 | P3170

EMOS
A brand of legrand

www.emos.eu | Order Code Item Number | Packaging Type

- source of light: CREE LED
- maximal light output: 170 lm
- maximal beam distance: 100 m
- number of lighting modes: 1
- runtime: 2.5 hrs
- impact resistance
- waterproof: yes (IP65)
- rechargeable: no
- battery: 1× AA

- battery type: LR6 (1,5 V)
- batteries included: no
- features: clip, loop
- dimensions: 101 × 22 × 22 mm
- weight: 47 g
- packaging: 1 pc, box





LED | 170 lm | 100 m | Water resistance | 1× AA | 3 YEARS WARRANTY

8 592920 089705

P3160 | 1/-/8/32
14 40 011 203 | P3160

- source of light: CREE LED
- maximal light output: 100 lm
- maximal beam distance: 65 m
- number of lighting modes: 1
- runtime: 3 hrs
- impact resistance
- waterproof: yes (IP65)
- rechargeable: no
- battery: 1× AAA

- battery type: LR03 (1.5 V)
- batteries included: no
- features: clip, loop
- dimensions: 98 × 16 × 16 mm
- weight: 32 g
- packaging: 1 pc, box





LED | 100 lm | 65 m | Water resistance | 1× AAA | 3 YEARS WARRANTY

8 592920 089675

P3150 | 1/-/8/32
14 40 011 100 | P3150

EMOS Flashlights

- quality aluminium casing ensures lightness and durability
- battery-powered and rechargeable
- run time up to 35 hours
- maximal beam distanceup to 230 m

- source of light: LED
- maximal light output: 600 lm
- maximal beam distance: 230 m
- number of lighting modes: 3
- runtime: 4–8 hrs
- focus
- impact resistance
- waterproof: yes (IP44)
- rechargeable

- battery: Li-Ion 18650 or 3× AAA
- battery type: 2 000 mAh/3.7 V or LR03 (1.5 V)
- batteries included
- recharge time: 4 hrs
- power connector type: USB C
- features: hand strap
- dimensions: 183 × 41 × 41 mm
- weight: 230 g
- packaging: 1 pc, box





LED | 600 lm | 230 m | Water resistance | Rechargeable | 3 lighting modes | QUICK SWITCH OFF

8 592920 092224

P3116 | 1/-/10/20
14 40 011 500 | P3116

- source of light: LED
- maximal light output: 500 lm
- maximal beam distance: 160 m
- number of lighting modes: 3
- runtime: 5.5–22 hrs
- focus
- impact resistance
- waterproof: yes (IP44)
- rechargeable: no

- battery: 4× AAA
- battery type: LR03 (1.5 V)
- batteries included: no
- features: hand strap
- dimensions: 128 × 37 × 37 mm
- weight: 129 g
- packaging: 1 pc, paper blister





LED | 500 lm | 160 m | Water resistance | 4× AAA | 3 lighting modes | QUICK SWITCH OFF

8 592920 092194

P3115 | 1/-/6/24
14 40 014 100 | P3115

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number	Packaging Type

- source of light: LED
- maximal light output: 330 lm
- maximal beam distance: 120 m
- number of lighting modes: 3
- runtime: 10–27 hrs
- focus
- impact resistance
- waterproof: yes (IP44)
- rechargeable: no

- battery: 3× AAA
- battery type: LR03 (1.5 V)
- batteries included: no
- features: hand strap
- dimensions: 128 × 37 × 37 mm
- weight: 121 g
- packaging: 1 pc, paper blister





LED | 330 lm | 120 m | Water resistance | 3× AAA | 3 lighting modes | QUICK SWITCH OFF

8 592920 092163

P3114 | 1/-/6/24
14 40 013 125 | P3114

- source of light: LED
- maximal light output: 120 lm
- maximal beam distance: 90 m
- number of lighting modes: 1
- runtime: 7 hrs
- focus
- impact resistance
- waterproof: yes (IP44)
- rechargeable: no

- battery: 2× AAA
- battery type: LR03 (1.5 V)
- batteries included: no
- features: hand strap
- dimensions: 131 × 21 × 21 mm
- weight: 48 g
- packaging: 1 pc, paper blister





LED | 120 lm | 90 m | Water resistance | 2× AAA

8 592920 092132

P3113 | 1/-/6/30
14 40 012 111 | P3113

- source of light: COB LED + LED
- maximal light output: 270 lm
- maximal beam distance: 145 m
- number of lighting modes: 5
- runtime: 4–15 hrs
- impact resistance
- waterproof: yes (IP44)
- rechargeable: no
- battery: 2× AA

- battery type: LR6 (1,5 V)
- batteries included: no
- features: clip, 1× magnet
- dimensions: 171 × 30 × 30 mm
- weight: 108 g
- packaging: 1 pc, paper blister





COB + LED | 270 lm | 145 m | Water resistance | 2× AA | 5 lighting modes

8 592920 092101

P3112 | 1/-/6/24
14 40 022 200 | P3112

- source of light: LED + COB LED
- maximal light output: 230 lm
- maximal beam distance: 210 m
- number of lighting modes: 3
- runtime: 1.5–6 hrs
- focus
- impact resistance: no
- waterproof: no
- rechargeable: no

- battery: 3× AAA
- battery type: LR03 (1.5 V)
- batteries included: no
- features: loop, 1× magnet
- dimensions: 150 × 37 × 37 mm
- weight: 158 g
- packaging: 1 pc, blister





COB + LED | 230 lm | 210 m | 3× AAA | 3 lighting modes | QUICK SWITCH OFF | BATTERY PROTECTION FUNCTION

8 592920 071908

P3111 | 1/-/6/18
14 40 813 170 | E-1631-1

- source of light: COB LED
- maximal light output: 100 lm
- maximal beam distance: 20 m
- number of lighting modes: 1
- runtime: 28 hrs
- impact resistance
- waterproof: yes (IP43)
- rechargeable: no
- battery: 3× AAA

- battery type: LR03 (1.5 V)
- batteries included: no
- features: hand strap
- dimensions: 102 × 28 × 28 mm
- packaging: 1 pc, blister





COB | 100 lm | 20 m | Water resistance | 3× AAA

8 592920 040874

P4704 | 1/-/12/60
14 40 813 150 | E-2217

EMOS
A brand of legrand

www.emos.eu | Order Code Item Number | Packaging Type

- source of light: COB LED
- maximal light output: 100 lm
- maximal beam distance: 15 m
- number of lighting modes: 1
- runtime: 35 hrs
- impact resistance
- waterproof: no
- rechargeable: no
- battery: 3× AAA

- battery type: LR03 (1.5 V)
- batteries included: no
- features: hand strap
- dimensions: 85 × 25 × 25 mm
- weight: 34 g
- packaging: 1 pc, blister





COB | 100 lm | 15 m | 3× AAA

8 592920 036228

P3894 | 1/-/12/60
14 40 813 110 | E3221

EMOS

LED Plastic Flashlights

- efficient, yet inexpensive light source
- compact and light
- for battery types: AA, AAA or D
- run time up to 140 hours
- maximal beam distance up to 305 m

- source of light: SMD LED + LED
- maximal light output: 215 lm
- maximal beam distance: 305 m
- number of lighting modes: 5
- runtime: 90 hrs
- impact resistance: no
- waterproof: no
- rechargeable: no
- battery: 3× AA

- battery type: LR6 (1,5 V)
- batteries included: no
- dimensions: 80 × 130 × 150 mm
- weight: 210 g
- packaging: 1 pc, box





SMD + LED | 215 lm | 305 m | 3× AA | 5 lighting modes

8 592920 085615

P4008 | 1/-/8/16
14 47 013 200 | P4008

- source of light: LED
- maximal light output: 75 lm
- maximal beam distance: 130 m
- number of lighting modes: 1
- runtime: 72 hrs
- focus
- impact resistance
- waterproof: yes (IP43)
- rechargeable: no

- battery: 3× AAA
- battery type: LR03 (1.5 V)
- batteries included: no
- features: hand strap
- dimensions: 120 × 35 × 35 mm
- weight: 83 g
- packaging: 1 pc, paper blister





LED | 75 lm | 130 m | Water resistance | 3× AAA

8 592920 038673

P4702 | 1/-/10/50
14 40 013 114 | E-1512

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- source of light: LED
- maximal light output: 55 lm
- maximal beam distance: 125 m
- number of lighting modes: 1
- runtime: 16 hrs
- impact resistance
- waterproof: no
- rechargeable: no
- battery: 2× AA

- battery type: LR6 (1,5 V)
- batteries included: no
- features: hand strap
- dimensions: 155 × 45 × 45 mm
- weight: 73 g
- packaging: 1 pc, paper blister





LED | 55 lm | 125 m | 2× AA

8 592920 080443

P3210 | 1/-/6/24
14 40 004 904 | E-5134

- source of light: LED
- maximal light output: 20 lm
- maximal beam distance: 35 m
- number of lighting modes: 1
- runtime: 30 hrs
- impact resistance
- waterproof: yes (IP43)
- rechargeable: no
- battery: 2× AA

- battery type: LR6 (1,5 V)
- batteries included: no
- features: hand strap
- dimensions: 162 × 43 × 43 mm
- weight: 85 g
- packaging: 1 pc, paper blister





LED | 20 lm | 35 m | Water resistance | 2× AA

8 595025 395160

P3861 | 1/-/-/24
14 40 032 202 | HL-R0217-2AA

- source of light: LED
- maximal light output: 20 lm
- maximal beam distance: 75 m
- number of lighting modes: 1
- runtime: 140 hrs
- impact resistance: no
- waterproof: yes (IP43)
- rechargeable: no
- battery: 2× D

- battery type: LR20 (1.5 V)
- batteries included: no
- features: hand strap
- dimensions: 190 × 68 × 68 mm
- weight: 216 g
- packaging: 1 pc, paper blister





LED | 20 lm | 75 m | Water resistance | 2× D

8 595025 395153

P3862 | 1/-/-/10
14 40 032 400 | HL-R0217-2D

- source of light: COB LED
- maximal light output: 300 lm
- maximal beam distance: 15 m
- number of lighting modes: 1
- runtime: 5 hrs
- impact resistance
- rechargeable: no
- battery: 3× AA
- battery type: LR6 (1,5 V)

- batteries included: no
- features: 1× hook, 1× magnet
- dimensions: 85 × 130 × 85mm
- packaging: 1 pc, box





COB | 300 lm | 15 m | 3× AA

8 592920 037492

P4006 | 1/-/-/16
14 47 003 100 | E-6020

- source of light: LED
- maximal light output: 10 lm
- maximal beam distance: 7 m
- number of lighting modes: 2
- runtime: 25–35 hrs
- rechargeable: no
- battery: 1× AAA
- battery type: LR03 (1.5 V)
- batteries included: no

- features: clip
- dimensions: 259 × 20 × 25 mm
- weight: 30 g
- packaging: 1 pc, blister





LED | 10 lm | 7 m | 1× AAA | 2 lighting modes

8 592920 106839

P3400 | 1/-/10/20
14 40 211 100 | P3400

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- source of light: LED + COB LED
- maximal light output: 110 lm
- maximal beam distance: 150 m
- number of lighting modes: 4
- runtime: 2,5–4,5 h
- focus
- impact resistance
- waterproof: IP44
- rechargeable

- battery: Li-Ion 18650
- battery type: 1 200 mAh/3.7 V
- batteries included
- recharge time: 2 hrs
- power connector type: micro USB B
- dimensions: 130 × 35 × 35 mm
- weight: 80 g





COB + LED | 110 lm | 150 m | Water resistance

Rechargeable | 4 lighting modes | Recharge battery protection

8 592920 125540

P3213 | 1/-/6/24
14 40 004 907 | P3213

LED Headlights

- indispensable part of outdoor gear
- selected models contains top quality CREE LED chips
- battery-powered and rechargeable models
- multiple light modes
- maximal beam distance up to 200 m
- run time up to 50 hours

- source of light: COB LED + LED
- maximal light output: 380 lm
- maximal beam distance: 30 m
- number of lighting modes: 4
- runtime: 3–12 hrs
- focus: no
- reflective head strap: no
- impact resistance
- waterproof: yes (IP43)

- charging
- power supply: Li-pol
- battery type: 1 200 mAh/3.7 V
- batteries included
- special function: hand-operated switching, quick swi
- accessories: USB-C cable
- dimensions: 300 × 3.2 × 20 mm
- weight: 73 g
- packaging: 1 pc, small paper box





COB + LED | 380 lm | 30 m | Water resistance

Rechargeable | 4 lighting modes | Switch off quick switch | Recharge battery protection

8 592920 112571

P3541 | 1/-/6/24
14 41 292 150 | P3541

- source of light: CREE LED
- maximal light output: 230 lm
- maximal beam distance: 80 m
- number of lighting modes: 4
- runtime: 3–13 hrs
- focus: no
- reflective head strap
- impact resistance
- waterproof: no

- charging
- power supply: Li-pol
- battery type: 1 200 mAh (3.7 V)
- batteries included
- special function: hand-operated switching, quick swi
- accessories: power cable
- dimensions: 61 × 37 × 31 mm
- weight: 60 g
- packaging: 1 pc, paper blister





LED | 230 lm | 80 m

Rechargeable | 4 lighting modes | Switch off quick switch | Recharge battery protection

8 592920 049990

P3534 | 1/-/10/40
14 41 250 920 | E-943

- source of light: CREE LED + 4× SMD
- maximal light output: 110 lm
- maximal beam distance: 55 m
- number of lighting modes: 3
- runtime: 3–7 hrs
- focus: no
- reflective head strap
- impact resistance: no
- waterproof: no

- charging
- power supply: Li-pol
- battery type: 850 mAh (3.7 V)
- batteries included
- special function: quick switch ON/OFF,battery prote
- accessories: power cable
- dimensions: 47 × 31 × 54 mm
- weight: 64 g
- packaging: 1 pc, paper blister





SMD + LED | 110 lm | 55 m

Rechargeable | 3 lighting modes | Switch off quick switch | Recharge battery protection

8 592920 070185

P3535 | 1/-/6/36
14 41 251 900 | E-HL030

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- source of light: CREE LED + COB LED (green, red) +
- maximal light output: 330 lm
- maximal beam distance: 65 m
- number of lighting modes: 7
- runtime: 18–72 hrs
- focus: no
- reflective head strap
- impact resistance
- waterproof: yes (IP44)

- charging: no
- power supply: 3× AAA + 1× CR2032
- battery type: LR03 (1.5 V) + CR2032 (3 V)
- batteries included: 1× CR2032
- special function: quick switch ON/OFF
- accessories: helmet hooks
- dimensions: 65 × 32 × 39 mm
- weight: 80 g/115 g
- packaging: 1 pc, paper blister

COB + LED | 330 lm | 65 m | Water resistance

3× AAA | 7 lighting modes | Quick switch ON/OFF





8 592920 036365

P3531 | 1/-/6/24

14 41 233 110 | E1801

- source of light: CREE LED + 2× red LED
- maximal light output: 330 lm
- maximal beam distance: 200 m
- number of lighting modes: 5
- runtime: 50–87 hrs
- focus
- reflective head strap: no
- impact resistance
- waterproof: yes (IP43)

- charging: no
- power supply: 3× AAA
- battery type: LR03 (1.5 V)
- batteries included: no
- special function: quick switch ON/OFF, focus
- dimensions: 60 × 48 × 43 mm
- weight: 70 g/105 g
- packaging: 1 pc, paper blister

LED | 330 lm | 200 m | Water resistance

3× AAA | 5 lighting modes | Quick switch ON/OFF | Battery protection





8 592920 084564

P3539 | 1/-/6/24

14 41 341 100 | P3539

- source of light: LED + COB LED (green, red)
- maximal light output: 220 lm
- maximal beam distance: 100 m
- number of lighting modes: 7
- runtime: 45–160 hrs
- focus: no
- reflective head strap
- impact resistance
- waterproof: yes (IP43)

- charging: no
- power supply: 3× AAA
- battery type: LR03 (1.5 V)
- batteries included: no
- special function: quick switch ON/OFF
- dimensions: 65 × 45 × 50 mm
- weight: 65 g/100 g
- packaging: 1 pc, paper blister

COB + LED | 220 lm | 100 m | Water resistance

3× AAA | 7 lighting modes | Quick switch ON/OFF





8 592920 080313

P3536 | 1/-/6/24

14 41 263 110 | E-HL117

- source of light: COB LED (white, red)
- maximal light output: 125 lm
- maximal beam distance: 20 m
- number of lighting modes: 3
- runtime: 9–19 hrs
- focus: no
- reflective head strap: no
- impact resistance
- waterproof: yes (IP44)

- charging: no
- power supply: 3× AAA
- battery type: LR03 (1.5 V)
- batteries included: no
- special function: battery protection
- dimensions: 69 × 43 × 46 mm
- weight: 54 g/89 g
- packaging: 1 pc, paper blister

COB | 125 lm | 20 m | Water resistance

3× AAA | 3 lighting modes | Battery protection





8 592920 036969

P3532 | 1/-/6/24

14 41 233 120 | E-923

- source of light: COB LED
- maximal light output: 150 lm
- maximal beam distance: 20 m
- number of lighting modes: 3
- runtime: 8–27 hrs
- focus: no
- reflective head strap
- impact resistance
- waterproof: no

- charging: no
- power supply: 3× AAA
- battery type: LR03 (1.5 V)
- batteries included: no
- dimensions: 60 × 40 × 40 mm
- weight: 53 g/88 g
- packaging: 1 pc, paper blister

COB | 150 lm | 20 m

3× AAA | 3 lighting modes





8 592920 029633

P3528 | 1/-/6/24

14 41 203 100 | E-1450

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- source of light: LED + 2× red LED
- maximal light output: 85 lm
- maximal beam distance: 65 m
- number of lighting modes: 4
- runtime: 50–120 hrs
- focus: no
- reflective head strap
- impact resistance
- waterproof: yes (IP43)

- charging: no
- power supply: 3× AAA
- battery type: LR03 (1.5 V)
- batteries included: no
- special function: quick switch ON/OFF
- dimensions: 58 × 38 × 44 mm
- weight: 54 g/89 g
- packaging: 1 pc, paper blister





LED | 85 lm | 65 m | Water resistance | 3× AAA | 4 lighting modes | Quick switch OFF

8 592920 004753

P3521 | 1/-/8/32
14 41 162 100 | HL-H0520

- source of light: COB LED
- maximal light output: 110 lm
- maximal beam distance: 15 m
- number of lighting modes: 3
- runtime: 20–40 hrs
- focus: no
- reflective head strap: no
- impact resistance
- waterproof: no

- charging: no
- power supply: 3× AAA
- battery type: LR03 (1.5 V)
- batteries included: no
- dimensions: 60 × 18 × 40 mm
- weight: 21 g/56 g
- packaging: 1 pc, paper blister





COB | 110 lm | 15 m | 3× AAA | 3 lighting modes

8 592920 080252

P3537 | 1/-/12/48
14 41 273 110 | E-HL120

- source of light: 3× LED
- maximal light output: 12 lm
- maximal beam distance: 12 m
- number of lighting modes: 3
- runtime: 55 hrs
- focus: no
- reflective head strap
- impact resistance
- waterproof: yes (IP44)

- charging: no
- power supply: 2× CR2032
- batteries included
- weight: 47 g
- packaging: 8 pcs, display box





LED | 12 lm | 12 m | Water resistance | 2× CR2032 | 3 lighting modes

8 592920 096697

P3540 | 8/-/8/24
14 41 212 901 | P3540

- source of light: COB LED + LED
- maximal light output: 500 lm
- maximal beam distance: 130 m
- number of lighting modes: 7
- runtime: 4–6.5 hrs
- focus: no
- reflective head strap
- impact resistance
- waterproof: yes (IP44)

- charging
- power supply: Li-pol
- battery type: 1 200 mAh/3.7 V
- batteries included
- special function: hand-operated switching, quick swi
- accessories: USB-C cable
- dimensions: 70 × 45 × 35 mm
- weight: 90 g
- packaging: 1 pc, small paper box





COB + LED | 500 lm | 130 m | Water resistance | Rechargeable | 7 lighting modes | Quick switch OFF | Rechargeable battery protection

8 592920 122716

P3542 | 1/-/6/24
14 41 317 000 | P3542

EMOS

LED Work Lights

LED Rechargeable Work Lights

- with quality SMD/COB LED chips, lights the whole workspace
- adapter for standard socket or car, some types also feature a power bank function
- adjustable body and numerous magnets and hooks for easy work
- reinforced ABS plastic – withstands most impacts and falls
- selected models are equipped with a powerbank function

- source of light: COB LED cold + COB LED warm
- maximal light output: 900 lm
- maximal beam distance: 35 m
- number of lighting modes: 16
- runtime: 3,5–12,5 h
- impact resistance
- rechargeable
- battery: Li-Ion
- battery type: 2× 2 000 mAh/3,7 V
- batteries included
- recharge time: 4.5 hrs
- power connector type: USB C
- features: magnet, rotating stand, hook
- dimensions: 125 × 45 × 95 mm
- weight: 325 g
- packaging: 1 pc, box





COB | 900 lm | 35 m | Rechargeable | PowerBank | Replaceable battery protection

8 592920 129524

P4542 | 1/-/-/12
14 50 000 420 | P4542

- source of light: COB LED
- maximal light output: 1 200 lm
- maximal beam distance: 60 m
- number of lighting modes: 3
- runtime: 3.5–6.5 hrs
- impact resistance
- waterproof: yes (IP44)
- rechargeable
- battery: Li-pol
- battery type: 2 000 mAh/3.7 V
- batteries included
- recharge time: 3 hrs
- power connector type: USB C
- features: magnet, stand, clip
- dimensions: 80 × 45 × 80 mm
- weight: 160 g
- packaging: 1 pc, box





COB | 1 200 lm | 60 m | Water resistance | Rechargeable | 3 lighting modes | Quick switch off | Replaceable battery protection

8 592920 129500

P4543 | 1/-/-/12
14 50 000 430 | P4543

- source of light: 2× COB LED
- maximal light output: 2 000 lm
- maximal beam distance: 70 m
- number of lighting modes: 5
- runtime: 3.5–14.5 hrs
- impact resistance
- waterproof: no
- rechargeable
- battery: Li-Ion accumulator
- battery type: 8 000 mAh/3.7 V
- batteries included
- recharge time: 7 hrs
- power connector type: USB C
- features: swivel handle, 4× magnet
- dimensions: 214 × 140 (280) × 56 mm
- weight: 818 g
- packaging: 1 pc, box





COB | 2 000 lm | 70 m | Rechargeable | PowerBank | 5 lighting modes | Quick switch off | Replaceable battery protection

8 592920 085646

P4536 | 1/-/4/8
14 50 000 320 | E-17172

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- source of light: COB LED
- maximal light output: 1 000 lm
- maximal beam distance: 45 m
- number of lighting modes: 3
- runtime: 3.5–15.5 hrs
- impact resistance
- waterproof: yes (IP44)
- rechargeable
- battery: Li-Ion accumulator

- battery type: 4 400 mAh/3.7 V
- batteries included
- recharge time: 7.5 hrs
- power connector type: micro USB B
- features: swivel handle
- dimensions: 172 × 45 × 126 mm
- weight: 453 g
- packaging: 1 pc, box





COB | 1 000 lm | 45 m | Water resistance | Rechargeable | PowerBank | 3 lighting modes | QUICK SWITCH OFF | RECHARGEABLE BATTERY PROTECTION | 3 YEARS WARRANTY

8 592920 075807

P4533 | 1/-/-/10
14 50 000 300 | E-5145

- source of light: COB LED
- maximal light output: 600 lm
- maximal beam distance: 35 m
- number of lighting modes: 2
- runtime: 2.5–3.5 hrs
- impact resistance
- waterproof: yes (IP44)
- rechargeable
- battery: Li-Ion accumulator

- battery type: 3 000 mAh/3.7 V
- batteries included
- recharge time: 3.5 hrs
- power connector type: micro USB B
- features: swivel handle
- dimensions: 172 × 45 × 126 mm
- weight: 436 g
- packaging: 1 pc, box





COB | 600 lm | 35 m | Water resistance | Rechargeable | PowerBank | 2 lighting modes | QUICK SWITCH OFF | RECHARGEABLE BATTERY PROTECTION

8 592920 077658

P4534 | 1/-/-/10
14 50 000 310 | E1204

- source of light: COB LED
- maximal light output: 1 000 lm
- maximal beam distance: 40 m
- number of lighting modes: 3
- runtime: 3–17 hrs
- impact resistance
- waterproof: yes (IP44)
- rechargeable
- battery: Li-Ion

- battery type: 2 200 mAh/3.7 V
- batteries included
- recharge time: 3 hrs
- power connector type: USB C
- features: magnet, stand, clip
- dimensions: 104 × 39 × 94 mm
- packaging: 1 pc, box





COB | 1 000 lm | 40 m | Water resistance | Rechargeable | PowerBank | 3 lighting modes | QUICK SWITCH OFF | RECHARGEABLE BATTERY PROTECTION

8 592920 108031

P4539 | 1/-/-/10
14 50 000 390 | P4539

- source of light: COB LED + LED
- maximal light output: 750 lm
- maximal beam distance: 35 m
- number of lighting modes: 6
- runtime: 2–13 h
- impact resistance
- waterproof: yes (IP44)
- rechargeable
- battery: Li-Ion

- battery type: 1 800 mAh/3.7 V
- batteries included
- recharge time: 2,5 h
- power connector type: USB C
- features: rotating reflector, magnet, hook
- dimensions: 28 × 35 × 147/285 mm
- weight: 118 g
- packaging: 1 pc, box





COB + LED | 750 lm | 100 m | Water resistance | Rechargeable | 6 lighting modes | QUICK SWITCH OFF | RECHARGEABLE BATTERY PROTECTION

8 592920 128961

P4540 | 1/-/5/25
14 50 000 291 | P4540

- source of light: COB LED + LED
- maximal light output: 450 lm
- maximal beam distance: 100 m
- number of lighting modes: 3
- runtime: 7–16 h
- impact resistance
- waterproof: yes (IP44)
- rechargeable
- battery: Li-Ion

- battery type: 2 000 mAh/3.7 V
- batteries included
- recharge time: 3.5 hrs
- power connector type: USB C
- features: magnet, hook
- dimensions: 43 × 43 × 197 mm
- weight: 190 g
- packaging: 1 pc, box





COB + LED | 450 lm | 100 m | Water resistance | Rechargeable | 2 lighting modes | RECHARGEABLE BATTERY PROTECTION

8 592920 128763

P4541 | 1/-/4/12
14 50 000 292 | P4541

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- source of light: COB LED + LED
- maximal light output: 470 lm
- maximal beam distance: 45 m
- number of lighting modes: 3
- runtime: 2.5–8 hrs
- impact resistance
- waterproof: no
- rechargeable
- battery: Li-Ion accumulator
- battery type: 1 800 mAh/3.7 V
- batteries included
- recharge time: 3.5 hrs
- features: swivel handle, clip, 1× hook, 2× magnet
- dimensions: 52 × 41 × 242 mm
- weight: 256 g
- packaging: 1 pc, box




COB + LED | 470 lm | 45 m | Rechargeable | 3 lighting modes | 3 YEARS WARRANTY

8 592920 072806

P4532 | 1/-/-/16
14 50 000 290 | E-7712

- source of light: COB LED + 5× LED
- maximal light output: 500 lm
- maximal beam distance: 30 m
- number of lighting modes: 3
- runtime: 2–26 hrs
- impact resistance
- waterproof: yes (IP43)
- rechargeable
- battery: Li-Ion accumulator
- battery type: 2 000 mAh/3.7 V
- batteries included
- recharge time: 3 hrs
- power connector type: 3.0 × 1.0/12 mm
- features: swivel handle, 1× hook, 3× magnet
- dimensions: 76 × 66 × 317 mm
- weight: 537 g
- packaging: 1 pc, box




COB + LED | 500 lm | 30 m | Water resistance | Rechargeable | 3 lighting modes

8 592920 038345

P4525 | 1/-/-/12
14 50 000 240 | E708A-COB+5

- source of light: COB LED + LED
- maximal light output: 380 lm
- maximal beam distance: 27 m
- number of lighting modes: 3
- runtime: 3.5–24 hrs
- impact resistance
- waterproof: yes (IP43)
- rechargeable
- battery: Li-Ion accumulator
- battery type: 2 500 mAh/3.7 V
- batteries included
- recharge time: 4 hrs
- power connector type: –
- features: swivel handle, 1× hook, 2× magnet
- dimensions: 56 × 50 × 240 mm
- weight: 265 g
- packaging: 1 pc, box




COB + LED | 380 lm | 27 m | Water resistance | Rechargeable | 3 lighting modes

8 592920 032695

P4518 | 1/-/6/12
14 50 000 180 | E709A-COB3W+6

- source of light: 2× COB LED + LED
- maximal light output: 670 lm
- maximal beam distance: 40 m
- number of lighting modes: 3
- runtime: 2–10 hrs
- impact resistance: no
- waterproof: no
- rechargeable
- battery: Li-Ion accumulator
- battery type: 2 200 mAh/3.7 V
- batteries included
- recharge time: 3 hrs
- power connector type: USB C
- features: 1× hook, 4× magnet
- dimensions: 35 × 33 × 257 mm
- packaging: 1 pc, box




COB + LED | 670 lm | 40 m | Rechargeable | PowerBank | 3 lighting modes

8 592920 080078

P4535 | 1/-/8/16
14 40 004 901 | E719AU

- source of light: COB LED + LED
- maximal light output: 400 lm
- maximal beam distance: 40 m
- number of lighting modes: 3
- runtime: 3–8.5 hrs
- impact resistance
- waterproof: yes (IP43)
- rechargeable
- battery: Li-Ion accumulator
- battery type: 2 000 mAh/3.7 V
- batteries included
- recharge time: 3 hrs
- power connector type: USB C
- features: swivel handle, clip, 1× hook, 1× magnet
- dimensions: 52 × 32 × 165 mm
- weight: 196 g
- packaging: 1 pc, box




COB + LED | 400 lm | 40 m | Water resistance | Rechargeable | 3 lighting modes

8 592920 072950

P4531 | 1/-/8/32
14 50 000 280 | E-17191 (P4531)

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- source of light: SMD LED + LED
- maximal light output: 700 lm
- maximal beam distance: 45 m
- number of lighting modes: 3
- runtime: 3–6 hrs
- impact resistance: no
- waterproof: no
- rechargeable
- battery: Li-Ion
- battery type: 1 200 mAh/3.7 V
- batteries included
- recharge time: 2 hrs
- power connector type: USB C
- features: 2× magnet
- dimensions: 37 × 14 × 240 mm
- weight: 100 g
- packaging: 1 pc, box





SMD + LED | 700 lm | 45 m | Rechargeable | 3 lighting modes | Recharge Safe Battery Protection | light boost

8 592920 092590

P4538 1/-/6/24

14 50 000 360 P4538

- source of light: COB LED + SMD LED
- maximal light output: 330 lm
- maximal beam distance: 45 m
- number of lighting modes: 3
- runtime: 3–7 hrs
- impact resistance
- waterproof: yes (IP43)
- rechargeable
- battery: Li-Ion
- battery type: 1 200 mAh/3.7 V
- batteries included
- recharge time: 2–4 hrs
- power connector type: USB C
- features: swivel handle, 1× clip, 1× magnet, 1× hook
- dimensions: 41 × 29 × 154 mm
- weight: 110 g
- packaging: 1 pc, box





COB + SMD | 330 lm | 45 m | Water resistance | Rechargeable | 3 lighting modes | Quick Switch Off | Recharge Safe Battery Protection

8 592920 092408

P4537 1/-/12/24

14 50 000 350 P4537

LED Work Lights

- fitted with quality COB LED chips – lights a large workspace
- small and light – just right for the hand
- powered by AA or AAA batteries
- adjustable body and numerous magnets and hooks for easy work
- reinforced ABS plastic – withstands most impacts and falls
- long run time

- source of light: COB LED
- maximal light output: 700 lm
- maximal beam distance: 35 m
- number of lighting modes: 3
- runtime: 8–14 hrs
- impact resistance
- waterproof: yes (IP43)
- rechargeable: no
- battery: 4× AA
- battery type: LR6 (1,5 V)
- batteries included: no
- features: swivel handle
- dimensions: 145 ×105 × 35 mm
- weight: 165 g
- packaging: 1 pc, small paper box





COB | 700 lm | 35 m | Impact resistance | Water resistance | 4× AA | 3 lighting modes | Quick Switch Off

8 592920 119877

P4113 1/-/-/14

14 40 814 200 P4113

- source of light: 2× COB LED + LED
- maximal light output: 350 lm
- maximal beam distance: 110 m
- number of lighting modes: 2
- runtime: 10–20 hrs
- waterproof: no
- rechargeable: no
- battery: 3× AA
- battery type: LR6 (1,5 V)
- batteries included: no
- features: swivel handle
- dimensions: 135 × 100 × 40 mm
- weight: 140 g
- packaging: 1 pc, small paper box





COB + LED | 350 lm | 110 m | 3× AA | 2 lighting modes

8 592920 119891

P4112 1/-/-/14

14 40 833 200 P4112

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- source of light: COB LED
- maximal light output: 180 lm
- maximal beam distance: 45 m
- number of lighting modes: 2
- runtime: 16–24 hrs
- impact resistance
- waterproof: no
- rechargeable: no
- battery: 3× AAA
- battery type: LR03 (1.5 V)
- batteries included: no
- features: break-over handle, 1× hook, 2× magnet
- dimensions: 59 × 30 × 133 mm
- weight: 110 g
- packaging: 1 pc, blister





COB | 180 lm | 45 m | 3× AAA | 2 lighting modes

8 592920 028100

P3888 | 1/-/12/24
14 40 813 100 | E-6166

LED Work Lights – 230 V

- powered from standard socket (230 V)
- long lead-in cable – 5 m
- fitted with hooks for hanging

- power source: 230 V~/50 Hz
- source of light: 20× LED 0,2 W (360 lm)
- type of cable: H05RN-F 2× 1.0 mm² rubber
- cable length: 5 m
- IP rating: IP20
- dimensions: 35 × 470 mm
- packaging: 1 pc, hanging





LED | 300 lm | 230 V~/50 Hz | 5 m

8 592920 032671

P4205 | 1/-/-/30
14 49 000 050 | E-A-5LP

- power source: 230 V~/50 Hz
- source of light: bulb 60 W max. (not included)
- type of cable: H05RN-F 2× 1.0 mm² rubber
- cable length: 5 m
- IP rating: IP20
- dimensions: 110 × 390 mm
- packaging: 1 pc, hanging





E27 | 230 V~/50 Hz | 5 m

8 595025 385963

P4203 | 1/-/-/24
14 49 000 030 | DY-YJD-A-8P (DY-YJD-A-8)

EMOS
A brand of legrand

www.emos.eu | Order Code Item Number | Packaging Type

EMOS

LED Rechargeable flashlights EXPERT

- torches with high luminous efficiency and long range
- most models fitted with top quality OSRAM or CREE LED chips
- last more than 70 hours on one charging, various light modes
- pack contains classic power adapter and car adapter
- made of reinforced ABS plastic resistant to falls

- source of light: OSRAM LED
- maximal light output: 300 lm
- maximal beam distance: 370 m
- number of lighting modes: 2
- runtime: 24–30 hrs
- impact resistance: no
- waterproof: no
- rechargeable
- battery: Li-Ion accumulator

- battery type: 2 400 mAh/3.7 V
- batteries included
- recharge time: 4.5 hrs
- dimensions: 162 × 100 × 140 mm
- weight: 275 g
- packaging: 1 pc, box



LED | 300 lm | 370 m | Rechargeable | 2 lighting modes | Recharge battery protection

8 592920 107966

P2311 | 1/-/-/10

14 50 000 370 | P2311

- source of light: OSRAM LED
- maximal light output: 750 lm
- maximal beam distance: 470 m
- number of lighting modes: 3
- runtime: 15–30 hrs
- impact resistance: no
- waterproof: no
- rechargeable
- battery: Li-Ion accumulator

- battery type: 4 000 mAh/3.7 V
- batteries included
- recharge time: 6.5 h
- power connector type: micro USB B
- dimensions: 212 × 150 × 155 mm
- weight: 527 g
- packaging: 1 pc, box



LED | 750 lm | 470 m | Rechargeable | 3 lighting modes | Recharge battery protection

8 592920 107980

P2312 | 1/-/-/4

14 50 000 380 | P2312

- source of light: SMD LED + LED
- maximal light output: 350 lm
- maximal beam distance: 260 m
- number of lighting modes: 7
- runtime: 5–23 hrs
- impact resistance
- waterproof
- rechargeable
- battery: Li-Ion accumulator

- battery type: 2× 2 000 mAh/3,7 V
- batteries included
- recharge time: 7 hrs
- power connector type: USB C
- features: swivel handle, 1× hook, 3× magnet
- dimensions: 175 × 91 mm
- weight: 406 g
- packaging: 1 pc, box



SMD + LED | 350 lm | 260 m | Water resistance | Rechargeable | 7 lighting modes | Quick switch off | Recharge battery protection

8 592920 119266

P2313 | 1/-/-/12

14 50 000 400 | P2313

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

LED Bike Lights

- front (white) and rear (red) bike lights with efficient LEDs
- consume little energy despite high luminous efficiency
- water-resistant and impact-resistant from 1 m
- bike mount included

- source of light: LED/SMD LED
- maximal light output: 90 lm
- maximal beam distance: 35 m
- number of lighting modes: 3/4
- runtime: 2–5 hrs
- impact resistance: no
- waterproof: no
- rechargeable
- battery: Li-pol

- battery type: 500 mAh/3.7 V
- batteries included
- recharge time: 1 h
- power connector type: micro USB B
- dimensions: 27 × 27 × 65 mm/71 × 21 × 18 mm
- weight: 34/25 g
- packaging: 1 pc, blister





SMD + LED | 90 lm | 35 m

Rechargeable | 7 lighting modes | Recharge battery protection

8 592920 109632

P3923 | 1/-/5/20
14 46 002 300 | P3923

- source of light: LED (front), 3× LED (back)
- maximal light output: 150 lm
- maximal beam distance: 110 m
- number of lighting modes: 10
- runtime: 96–172 hrs
- waterproof: yes (IP43)
- rechargeable: no
- battery: front: 3× AAA, back: 2× AAA
- battery type: LR03 (1.5 V)

- batteries included: no
- dimensions: 28 × 103 mm, 30 × 65 × 40 mm
- packaging: 1 pc, blister





LED | 150 lm | 110 m | Water resistance

5× AAA | 10 lighting modes

8 592920 029848

P3920 | 1/-/5/20
14 46 002 000 | E-3219

- source of light: COB LED white, COB LED red
- maximal light output: 22 lm
- maximal beam distance: 7 m
- number of lighting modes: 2
- runtime: 80 hrs
- impact resistance
- waterproof: yes (IP43)
- rechargeable: no
- battery: 2× 2 CR2032

- battery type: CR2032 (3 V)
- batteries included
- dimensions: 61 × 17 × 32 mm
- packaging: 1 pc, blister





COB | 22 lm | 7 m | Water resistance

4× CR2032 | 2 lighting modes

8 592920 071984

P3922 | 1/-/6/12
14 46 002 200 | E-8068

- source of light: 2× LED white, 2× LED red
- maximal light output: 10 lm
- maximal beam distance: 13 m
- number of lighting modes: 3
- runtime: 140 hrs
- impact resistance
- waterproof: yes (IP43)
- rechargeable: no
- battery: 2× 2 CR2032

- battery type: CR2032 (3 V)
- batteries included
- dimensions: 90 × 29 × 25 mm
- packaging: 1 pc, blister





LED | 10 lm | 13 m | Water resistance

4× CR2032 | 3 lighting modes

8 592920 071953

P3921 | 1/-/6/36
14 46 002 100 | E-8075 (P3921)

EMOS

LED Night Lights

LED Battery Night Lights

- better orientation in the dark for both children and adults
- powered by AA or AAA batteries
- smart solution for places without power (attic or cabinet)
- with switch, photosensor (day/night) or PIR sensor
- very low power consumption; run time: 41–100 hours

- source of light: 8× LED 5 mm in diameter
- light color: cool white
- power source: 3× 1.5 V AA
- switch
- automatic on/off
- photosensor
- motion sensor
- time delay: 25 seconds +/- 5 seconds
- dimensions: 90 × 37 mm
- packaging: 1 pc, blister





LED | 60 lm | 15 m | 3× AA

8 592920 079317

P3310K | 1/-/4/16
14 40 883 200 | E-84001

- source of light: COB LED
- light color: cool white
- power source: 3× 1.5 V AA
- switch
- automatic on/off
- photosensor
- motion sensor
- time delay: 25 seconds +/- 5 seconds
- rotation: 360°
- dimensions: 85 × 96 × 119 mm
- packaging: 1 pc, box





COB | 90 lm | 15 m | 3× AA

8 592920 080153

P3311 | 1/-/-/16
14 40 004 902 | E-XGCL-08MC

- source of light: 3× LED 5 mm in diameter
- light color: cool white
- power source: 3× 1.5 V AAA (included)
- switch
- motion sensor: no
- dimensions: 65 × 23 × 65 mm
- packaging: 3 pcs, blister





LED | 10 lm | 15 m | 3× AAA

8 595025 349170

P3819 | 3/-/12/36
14 40 033 100 | P3819

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- source of light: SMD LED
- maximal light output: 35 lm
- maximal beam distance: 22 m
- number of lighting modes: 1
- runtime: 90 hrs
- impact resistance
- waterproof: no
- rechargeable: no
- battery: 3× AAA
- battery type: LR03 (1.5 V)
- batteries included: no
- dimensions: 108 × 148 mm
- weight: 195 g
- packaging: 1 pc, box





SMD | 35 lm | 22 m | 3× AAA | Timer

8 592920 091357

P3380 | 1/-/4/8

14 40 013 124 | P3380

LED 230 V Night Lights

- better orientation in the dark for both children and adults
- very low power consumption
- socket-powered – comfortable and eco-friendly (no batteries)
- selected models with passthrough socket
- with switch, photosensor (day/night) or PIR sensor

- source of light: LED
- light color: cool white
- power source: 230 V~/50 Hz, max. 0.5 W
- automatic on/off
- photosensor
- motion sensor: no
- dimensions: 46 × 67 × 46 mm
- packaging: 1 pc, blister





LED | 230 V~/50 Hz | Sensor | COOL WHITE

8 592920 002148

P3306 | 1/4/-/36

14 56 000 060 | EMN100

- source of light: 1× LED 5 mm in diameter
- light color: cool white
- power source: 230 V~/50 Hz, max. 0,3 W
- switch
- automatic on/off
- photosensor
- motion sensor: no
- dimensions: 60 × 60 × 73 mm
- packaging: 1 pc, blister





LED | 230 V~/50 Hz | USB OUT | Sensor | COOL WHITE

8 592920 080030

P3313 | 1/-/4/16

14 56 000 100 | P3313

- source of light: LED
- light color: warm white
- power source: 230 V~/50 Hz
- automatic on/off
- photosensor
- motion sensor: no
- dimensions: 51 × 56 × 51 mm
- packaging: 1 pc, blister





LED | 230 V~/50 Hz | Sensor | WARM WHITE

8 592920 109526

P3314 | 1/-/-/20

14 56 000 110 | P3314

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- source of light: LED
- light color: warm white
- power source: 230 V~/50 Hz
- automatic on/off
- photosensor
- motion sensor: no
- dimensions: 63 × 57 × 63 mm
- packaging: 1 pc, blister





LED | 230 V~/50 Hz | Sensor | WARM WHITE

8 592920 109540

P3315 1/-/-/20

14 56 000 120 P3315

- source of light: LED
- light color: warm white
- power source: 230 V~/50 Hz
- switch
- automatic on/off
- photosensor
- motion sensor: no
- dimensions: 76 × 54 × 76 mm
- packaging: 1 pc, blister





LED | 230 V~/50 Hz | ON/OFF | Sensor | WARM WHITE

8 592920 109564

P3316 1/-/-/15

14 56 000 130 P3316

- source of light: LED
- light color: warm white
- power source: 230 V~/50 Hz
- switch
- automatic on/off
- photosensor
- motion sensor: no
- dimensions: 87 × 63 × 87 mm
- packaging: 1 pc, blister





LED | 230 V~/50 Hz | ON/OFF | Sensor | WARM WHITE

8 592920 109588

P3317 1/-/-/10

14 56 000 140 P3317

- source of light: LED
- light color: warm white
- power source: 230 V
- automatic on/off
- photosensor
- motion sensor
- time delay: 90 seconds +/- 3 seconds
- dimensions: 55 × 80 × 102 mm
- packaging: 1 pc, paper blister





LED | 230 V~/50 Hz | PIR sensor | Sensor | WARM WHITE

8 592920 118450

P3318 1/-/-/12

14 56 000 150 P3318

- source of light: SMD LED
- light color: warm white
- power source: 230 V
- switch
- automatic on/off
- photosensor
- motion sensor
- time delay: 30/60/120 seconds
- dimensions: 74 × 54 × 80 mm
- packaging: 1 pc, paper blister





LED | 230 V~/50 Hz | Timer | Dimmable | PIR sensor | Sensor | WARM WHITE

8 592920 118467

P3319 1/-/-/15

14 56 000 160 P3319

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- source of light: LED
- light color: warm white
- power source: 230 V~/50 Hz
- automatic on/off
- photosensor
- motion sensor: no
- dimensions: 79 × 66 × 79 mm
- packaging: 1 pc, blister





LED | 230 V~/50 Hz | Sensor | 1× | WARM WHITE

8 592920 118658

P3320 1/-/3/18

14 56 000 170 P3320

EMOS

LED Flashlights display box

- made of aluminium or reinforced ABS plastic
- always at hand: in the pocket, tool case or the car
- batteries included
- flashlights with maximum beam distance to 150 m
- run timeup to 128 hours

- source of light: COB LED
- maximal light output: 110 lm
- maximal beam distance: 15 m
- number of lighting modes: 3
- runtime: 20–40 hrs
- focus: no
- reflective head strap: no
- impact resistance
- waterproof: no

- charging: no
- power supply: 3× AAA
- battery type: LR03 (1.5 V)
- batteries included
- dimensions: 60 × 18 × 40 mm
- weight: 21 g/56 g
- packaging: 12 pcs, display box





COB | 110 lm | 15 m | 3× AAA | 3 lighting modes

8 592920 080344

P3538 12/-/12/60

14 41 283 110 E-HL120

- source of light: COB LED + 3× LED
- maximal light output: 200 lm
- maximal beam distance: 17 m
- number of lighting modes: 2
- runtime: 25–128 hrs
- impact resistance
- waterproof: no
- rechargeable: no
- battery: 3× AAA

- battery type: LR03 (1.5 V)
- batteries included
- features: 1× hook, 1× magnet
- dimensions: 94 × 34 × 64 mm
- weight: 105 g
- packaging: 12 pcs, display box





COB + LED | 200 lm | 17 m | 3× AAA | 2 lighting modes

8 592920 029558

P3889 12/-/12/60

14 40 833 100 E-6113

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- source of light: COB LED + LED
- maximal light output: 230 lm
- maximal beam distance: 80 m
- number of lighting modes: 2
- runtime: 47–72 hrs
- impact resistance
- waterproof: no
- rechargeable: no
- battery: 3× AAA
- battery type: LR03 (1.5 V)
- batteries included
- features: clip
- dimensions: 168 × 29 × 26 mm
- weight: 64 g
- packaging: 16 pcs, display box





COB + LED | 230 lm | 80 m | 3× AAA | 2 lighting modes

8 592920 037102

P3897 | 16/-/16/64
14 40 813 130 | P3897

- source of light: LED
- maximal light output: 75 lm
- maximal beam distance: 125 m
- number of lighting modes: 1
- runtime: 15 hrs
- focus
- impact resistance
- waterproof: yes (IP43)
- rechargeable: no
- battery: 3× AAA
- battery type: LR03 (1.5 V)
- batteries included
- features: hand strap
- dimensions: 120 × 35 × 35 mm
- weight: 83 g
- packaging: 12 pcs, display box





LED | 75 lm | 125 m | Water resistance | 3× AAA

8 592920 038710

P4703 | 12/-/12/96
14 40 013 115 | E-1512

- source of light: COB LED
- maximal light output: 100 lm
- maximal beam distance: 20 m
- number of lighting modes: 1
- runtime: 28 hrs
- impact resistance
- waterproof: yes (IP43)
- rechargeable: no
- battery: 3× AAA
- battery type: LR03 (1.5 V)
- batteries included
- features: hand strap
- dimensions: 102 × 28 × 28 mm
- packaging: 12 pcs, display box





COB | 100 lm | 20 m | Water resistance | 3× AAA

8 592920 042625

P4705 | 12/-/12/96
14 40 813 160 | E-2217

- source of light: 9× LED
- maximal light output: 50 lm
- maximal beam distance: 22 m
- number of lighting modes: 1
- runtime: 30 hrs
- impact resistance
- rechargeable: no
- battery: 3× AAA
- battery type: LR03 (1.5 V)
- batteries included
- dimensions: 88 × 26 × 26 mm
- weight: 71 g
- packaging: 24 pcs, display box





LED | 50 lm | 22 m | 3× AAA

8 595025 395184

P3848A | 24/-/24/96
14 40 093 109 | LFL215-9T

- source of light: COB LED
- maximal light output: 100 lm
- maximal beam distance: 12 m
- number of lighting modes: 1
- runtime: 25 hrs
- impact resistance
- waterproof: no
- rechargeable: no
- battery: 3× AAA
- battery type: LR03 (1.5 V)
- batteries included
- features: hand strap
- dimensions: 100 × 29 × 29 mm
- weight: 34 g
- packaging: 12 pcs, display box





COB | 100 lm | 12 m | 3× AAA

8 592920 040638

P4706 | 12/-/12/96
14 40 013 116 | E2910-C

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- source of light: COB LED
- maximal light output: 30 lm
- maximal beam distance: 8 m
- number of lighting modes: 4
- runtime: 3.5–60 hrs
- rechargeable: no
- battery: 2× AAA
- battery type: LR03 (1.5 V)
- batteries included
- dimensions: 63 × 25 × 35 mm
- weight: 38 g
- packaging: 12 pcs, display box





COB | 30 lm | 8 m | 2× AAA | 4 lighting modes

8 592920 028858

P3887 12/-/12/72

14 40 812 900 E-3205

- source of light: COB LED
- maximal light output: 350 lm
- maximal beam distance: 25 m
- number of lighting modes: 1
- runtime: 4 hrs
- impact resistance: no
- waterproof: no
- rechargeable: no
- battery: 3× AAA
- battery type: LR03 (1.5 V)
- batteries included
- features: clip, 1× magnet
- dimensions: 42 × 118 × 30 mm
- weight: 48 g
- packaging: 12 pcs, display box





COB | 350 lm | 25 m | 3× AAA


8 592920 132050

P4715 12/-/12/36

14 40 113 100 P4715

- source of light: LED
- maximal light output: 10 lm
- number of lighting modes: 2
- runtime: 160 hrs
- impact resistance
- waterproof: yes (IP43)
- rechargeable: no
- battery: 2× CR2032
- battery type: CR2032 (3 V)
- batteries included
- features: arm band
- dimensions: 190 × 35 × 17 mm
- weight: 44 g
- packaging: 16 pcs, display box





LED | 400 m | 160 h | Water resistance | Impact resistance | 2× CR2032 | 2 lighting modes

8 282920 119648

P4713 16/-/16/32

14 40 812 903 P4713

- source of light: COB LED
- maximal light output: 750 lm
- maximal beam distance: 40 m
- number of lighting modes: 7
- runtime: 45 min – 2 h
- impact resistance
- waterproof: yes (IP44)
- rechargeable
- battery: Li-pol
- battery type: 500 mAh/3.7 V
- batteries included
- recharge time: 1 h
- power connector type: USB C
- features: clip, 1× magnet, rotary stand, bottle opene
- dimensions: 61 × 45 × 21 mm
- weight: 37 g
- packaging: 10 pcs, display box





COB | 750 lm | 40 m | Water resistance | Impact resistance | Rechargeable | 7 lighting modes

8 592920 124741

P4714 10/-/10/40

14 50 000 410 P4714

LED Keychains display box

- cute LED keychains for children
- different designs and motives
- some also make a sound when lit up
- powered by 3 button batteries (included)

- source of light: LED
- maximal light output: 5 lm
- number of lighting modes: 1
- rechargeable: no
- battery: 3× 1.5 V LR54
- battery type: LR54 (1.5 V)
- batteries included
- packaging: 24 pcs, display box





LED | 5 lm

3× LR54

8 592920 089637

P4712

14 39 013 901

24/-/24/96

E-1321; E-1322; E-1323; E-1324

- source of light: LED
- maximal light output: 5 lm
- number of lighting modes: 1
- rechargeable: no
- battery: 3× 1.5 V LR54
- battery type: LR54 (1.5 V)
- batteries included
- packaging: 24 pcs, display box





LED | 5 lm

3× LR54

8 592920 089613

P4711

14 39 013 900

24/-/24/96

E-1325; E-1326; E-1327; E-1328

- source of light: 1× LED
- maximal light output: 5 lm
- number of lighting modes: 1
- impact resistance: no
- waterproof: no
- rechargeable: no
- battery: 3× LR54
- battery type: LR54 (1.5 V)
- batteries included
- packaging: 24 pcs, display box





LED | 5 lm

3× LR54

8 592920 084540

P4710

14 39 011 900

24/-/24/96

E-1317; E-1318; E-1319; E-1320

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

Insect killer

- electric trap for reliable protection from pesky insects
- 1 m lead-in cable

- source of light: UV-A LED tube
- number of lighting modes: 1
- battery: 220–240 V~/50 Hz
- features: hand strap
- dimensions: 136 × 240 mm
- packaging: 1 pc, box





8 592920 131466

P4104 | 1/-/-/6
14 48 000 040 | P4104

Spare parts

- primarily as accessory to rechargeable LED torches
- socket adapters
- maintenance-free lead-acid accumulators
- switches

V94420 | 1/-/-/90
16 06 022 000 | LG060030EP (LGSPSA060030E

8 595025 394460



input voltage: 230 V~, 50/60 Hz ▪ designed for: 3810. 3 W (P2306) lamp ▪ output voltage: 6 V= ▪ output current: 300 mA ▪ size of the connector: 5.5 × 2.5/9.5 mm ▪ power supply type: cable with DC connector ▪ dimensions: 71 × 42 × 55 mm ▪ packaging: 1 pc, box

P2398 | 1/-/-/500
14 33 010 008 | 3810LED

8 595025 366382



packaging: 1 pc

P2399 | 1/-/-/500
14 33 010 009 | 3810

8 595025 361141



packaging: 1 pc

B9664 | 1/-/-/20
12 01 001 800 | DHB440

8 595025 394477



for lanterns: 3810 - 3 W (P2306), 3810-10 W (P2307) ▪ chemical constitution: Pb ▪ voltage: 4 V ▪ capacity: 4 Ah ▪ dimensions: 70 × 47 × 101 mm ▪ packaging: 1 pc

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

Lighting



Light sources

LED bulbs

Filament

- maximum lighting efficiency with minimum energy consumption
- acts as a perfect replacement for tungsten filament bulbs
- instantly illuminates 100% at the flick of a switch
- high luminous efficacy up to 212 lm/W
- use: modern interiors, reception areas

UV Free | Hg Free | 100 % = 0 s | 230 V~/50 Hz

- replacement of incandescent bulb: 60 W
- shape: A60
- luminous flux: 806 lm
- color temperature: 2 700 K
- power: 3.8 W
- luminous efficacy: 212 lm/W
- energy efficiency class: A
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 108 mm
- packaging: 1 pc, small box





E27 | 806 lm | 3.8 W | 50 000 h | Dimmable | 2 700 K WARM WHITE | 5 YEARS WARRANTY | A | ULTRA EFFICIENT

8 592920 120569

ZF5147 | 1/-/10/40

15 25 283 273 | EMOS

- replacement of incandescent bulb: 60 W
- shape: A60
- luminous flux: 806 lm
- color temperature: 2 700 K
- power: 3.8 W
- luminous efficacy: 212 lm/W
- energy efficiency class: A
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 108 mm
- packaging: 3 pcs, small box





E27 | 806 lm | 3.8 W | 50 000 h | Dimmable | 2 700 K WARM WHITE | 5 YEARS WARRANTY | A | ULTRA EFFICIENT

8 592920 120590

ZF5147.3 | 3/-/12/48

15 25 283 274 | EMOS

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- replacement of incandescent bulb: 60 W
- shape: A60
- luminous flux: 806 lm
- color temperature: 4 000 K
- power: 3.8 W
- luminous efficacy: 212 lm/W
- energy efficiency class: A
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 108 mm
- packaging: 1 pc, small box





E27 | 806 lm | 3.8 W | 50 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | A | ULTRA EFFICIENT

8 592920 120620

ZF5148 | 1/-/10/40

15 25 283 410 | EMOS

- replacement of incandescent bulb: 60 W
- shape: A60
- luminous flux: 806 lm
- color temperature: 4 000 K
- power: 3.8 W
- luminous efficacy: 212 lm/W
- energy efficiency class: A
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 108 mm
- packaging: 3 pcs, small box





E27 | 806 lm | 3.8 W | 50 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | A | ULTRA EFFICIENT

8 592920 120651

ZF5148.3 | 3/-/12/48

15 25 283 411 | EMOS

- replacement of incandescent bulb: 75 W
- shape: A60
- luminous flux: 1 060 lm
- color temperature: 2 700 K
- power: 5 W
- luminous efficacy: 212 lm/W
- energy efficiency class: A
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 108 mm
- packaging: 1 pc, small box





E27 | 1 060 lm | 5 W | 50 000 h | Dimmable | 2 700 K WARM WHITE | 5 YEARS WARRANTY | A | ULTRA EFFICIENT

8 592920 120682

ZF5157 | 1/-/10/40

15 25 283 275 | EMOS

- replacement of incandescent bulb: 75 W
- shape: A60
- luminous flux: 1 060 lm
- color temperature: 2 700 K
- power: 5 W
- luminous efficacy: 212 lm/W
- energy efficiency class: A
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 108 mm
- packaging: 3 pcs, small box





E27 | 1 060 lm | 5 W | 50 000 h | Dimmable | 2 700 K WARM WHITE | 5 YEARS WARRANTY | A | ULTRA EFFICIENT

8 592920 120712

ZF5157.3 | 3/-/12/48

15 25 283 276 | EMOS

- replacement of incandescent bulb: 75 W
- shape: A60
- luminous flux: 1 060 lm
- color temperature: 4 000 K
- power: 5 W
- luminous efficacy: 212 lm/W
- energy efficiency class: A
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 108 mm
- packaging: 1 pc, small box





E27 | 1 060 lm | 5 W | 50 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | A | ULTRA EFFICIENT

8 592920 120743

ZF5158 | 1/-/10/40

15 25 283 412 | EMOS

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- replacement of incandescent bulb: 75 W
- shape: A60
- luminous flux: 1 060 lm
- color temperature: 4 000 K
- power: 5 W
- luminous efficacy: 212 lm/W
- energy efficiency class: A
- beam angle: 360°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 108 mm
- packaging: 3 pcs, small box



E27 | 1 060 lm | 5 W | 50 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | A | ULTRA EFFICIENT

8 592920 120774

ZF5158.3 | 3/-/12/48
15 25 283 413 | EMOS

- replacement of incandescent bulb: 100 W
- shape: A60
- luminous flux: 1 521 lm
- color temperature: 2 700 K
- power: 7.2 W
- luminous efficacy: 211 lm/W
- energy efficiency class: A
- beam angle: 360°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 108 mm
- packaging: 1 pc, small box



E27 | 1 521 lm | 7.2 W | 50 000 h | Dimmable | 2 700 K WARM WHITE | 5 YEARS WARRANTY | A | ULTRA EFFICIENT

8 592920 126103

ZF5167 | 1/-/10/20
15 25 283 279 | ZF5167

- replacement of incandescent bulb: 100 W
- shape: A60
- luminous flux: 1 521 lm
- color temperature: 4 000 K
- power: 7.2 W
- luminous efficacy: 211 lm/W
- energy efficiency class: A
- beam angle: 360°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 108 mm
- packaging: 1 pc, small box



E27 | 1 521 lm | 7.2 W | 50 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | A | ULTRA EFFICIENT

8 592920 126134

ZF5168 | 1/-/10/20
15 25 283 417 | ZF5168

- replacement of incandescent bulb: 75 W
- dimmable
- shape: A60
- luminous flux: 1 055 lm
- color temperature: 2 700 K
- power: 7.5 W
- luminous efficacy: 141 lm/W
- energy efficiency class: D
- beam angle: 320°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 106 mm
- packaging: 1 pc, small box



E27 | 1 055 lm | 7.5 W | 25 000 h | Dimmable | 2 700 K WARM WHITE | 3 YEARS WARRANTY | D

8 592920 125267

ZF5154D | 1/-/10/40
15 25 283 277 | ZF5154D

- replacement of incandescent bulb: 75 W
- dimmable
- shape: A60
- luminous flux: 1 055 lm
- color temperature: 4 000 K
- power: 7.5 W
- luminous efficacy: 141 lm/W
- energy efficiency class: D
- beam angle: 320°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 106 mm
- packaging: 1 pc, small box



E27 | 1 055 lm | 7.5 W | 25 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | D

8 592920 125298

ZF5254D | 1/-/10/40
15 25 283 415 | ZF5254D

EMOS
A brand of legrand

www.emos.eu

Order Code / Item Number | Packaging Type

- replacement of incandescent bulb: 100 W
- dimmable
- shape: A60
- luminous flux: 1 521 lm
- color temperature: 2 700 K
- power: 11 W
- luminous efficacy: 138 lm/W
- energy efficiency class: D
- beam angle: 320°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 108 mm
- packaging: 1 pc, small box





E27 | 1 521 lm | 11 W | 25 000 h | Dimmable | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A–G D

8 592920 125083

ZF5164D | 1/-/10/20

15 25 283 278 | ZF5164D

- replacement of incandescent bulb: 100 W
- dimmable
- shape: A60
- luminous flux: 1 521 lm
- color temperature: 4 000 K
- power: 11 W
- luminous efficacy: 138 lm/W
- energy efficiency class: D
- beam angle: 320°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 108 mm
- packaging: 1 pc, small box





E27 | 1 521 lm | 11 W | 25 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A–G D

8 592920 125113

ZF5264D | 1/-/10/20

15 25 283 416 | ZF5264D

- replacement of incandescent bulb: 40 W
- shape: A60
- luminous flux: 470 lm
- color temperature: 2 700 K
- power: 3.4 W
- luminous efficacy: 138 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 108 × 60 × 60 mm
- packaging: 1 pc, small box





E27 | 470 lm | 3.4 W | 25 000 h | Dimmable | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A–G D

8 592920 129715

ZF5D22 | 1/-/10/20

15 25 743 203 | ZF5D22

- replacement of incandescent bulb: 40 W
- shape: A60
- luminous flux: 470 lm
- color temperature: 4 000 K
- power: 3.4 W
- luminous efficacy: 138 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 108 × 60 × 60 mm
- packaging: 1 pc, small box





E27 | 470 lm | 3.4 W | 25 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A–G D

8 592920 129746

ZF5D23 | 1/-/10/20

15 25 733 497 | ZF5D23

- replacement of incandescent bulb: 60 W
- shape: A60
- luminous flux: 806 lm
- color temperature: 2 700 K
- power: 5.9 W
- luminous efficacy: 137 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 108 × 60 × 60 mm
- packaging: 1 pc, small box





E27 | 806 lm | 5.9 W | 25 000 h | Dimmable | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A–G D

8 592920 129777

ZF5D42 | 1/-/10/20

15 25 743 204 | ZF5D42

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- replacement of incandescent bulb: 60 W
- shape: A60
- luminous flux: 806 lm
- color temperature: 2 700 K
- power: 5.9 W
- luminous efficacy: 137 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 108 × 60 × 60 mm
- packaging: 2 pcs, small box





E27 | 806 lm | 5.9 W | 25 000 h | Dimmable | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A↑G D

8 592920 130049

ZF5D42.2 2/-/10/20

15 25 743 207 ZF5D42.2

- replacement of incandescent bulb: 60 W
- shape: A60
- luminous flux: 806 lm
- color temperature: 4 000 K
- power: 5.9 W
- luminous efficacy: 137 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 108 × 60 × 60 mm
- packaging: 1 pc, small box





E27 | 806 lm | 5.9 W | 25 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A↑G D

8 592920 129807

ZF5D43 1/-/10/20

15 25 733 498 ZF5D43

- replacement of incandescent bulb: 75 W
- shape: A60
- luminous flux: 1 060 lm
- color temperature: 2 700 K
- power: 7.8 W
- luminous efficacy: 136 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 108 × 60 × 60 mm
- packaging: 1 pc, small box





E27 | 1 060 lm | 7.8 W | 25 000 h | Dimmable | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A↑G D

8 592920 129838

ZF5D52 1/-/10/20

15 25 743 205 ZF5D52

- replacement of incandescent bulb: 75 W
- shape: A60
- luminous flux: 1 060 lm
- color temperature: 4 000 K
- power: 7.8 W
- luminous efficacy: 136 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 108 × 60 × 60 mm
- packaging: 1 pc, small box





E27 | 1 060 lm | 7.8 W | 25 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A↑G D

8 592920 129869

ZF5D53 1/-/10/20

15 25 733 499 ZF5D53

- replacement of incandescent bulb: 100 W
- shape: A60
- luminous flux: 1 521 lm
- color temperature: 2 700 K
- power: 10.5 W
- luminous efficacy: 145 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 108 × 60 × 60 mm
- packaging: 1 pc, small box





E27 | 1 521 lm | 10.5 W | 25 000 h | Dimmable | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A↑G D

8 592920 129890

ZF5D62 1/-/10/20

15 25 743 206 ZF5D62

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- replacement of incandescent bulb: 100 W
- shape: A60
- luminous flux: 1 521 lm
- color temperature: 4 000 K
- power: 10.5 W
- luminous efficacy: 145 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 108 × 60 × 60 mm
- packaging: 1 pc, small box





E27 | 1 521 lm | 10.5 W | 25 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A–G D

8 592920 129920

ZF5D63 1/-/10/20

15 25 743 400 ZF5D63

- replacement of incandescent bulb: 150 W
- shape: A70
- luminous flux: 2 452 lm
- color temperature: 2 700 K
- power: 18 W
- luminous efficacy: 136 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 70 × 70 × 126 mm
- packaging: 1 pc, small box





E27 | 2 452 lm | 18 W | 25 000 h | Dimmable | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A–G D

8 592920 129951

ZF5D82 1/-/10/20

15 25 743 208 ZF5D82

- replacement of incandescent bulb: 150 W
- shape: A70
- luminous flux: 2 452 lm
- color temperature: 4 000 K
- power: 18 W
- luminous efficacy: 136 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 70 × 70 × 126 mm
- packaging: 1 pc, small box





E27 | 2 452 lm | 18 W | 25 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A–G D

8 592920 129982

ZF5D83 1/-/10/20

15 25 743 401 ZF5D83

- replacement of incandescent bulb: 25 W
- shape: Mini Globe
- luminous flux: 250 lm
- color temperature: 2 700 K
- power: 1.8 W
- luminous efficacy: 139 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 78 × 45 × 45 mm
- packaging: 1 pc, small box





E27 | 250 lm | 1.8 W | 25 000 h | Dimmable | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A–G D

8 592920 130407

ZF6D02 1/-/10/60

15 25 743 209 ZF6D02

- replacement of incandescent bulb: 25 W
- shape: Mini Globe
- luminous flux: 250 lm
- color temperature: 4 000 K
- power: 1.8 W
- luminous efficacy: 139 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 78 × 45 × 45 mm
- packaging: 1 pc, small box





E27 | 250 lm | 1.8 W | 25 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A–G D

8 592920 130438

ZF6D03 1/-/10/60

15 25 743 402 ZF6D03

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- replacement of incandescent bulb: 40 W
- shape: Mini Globe
- luminous flux: 470 lm
- color temperature: 2 700 K
- power: 3.4 W
- luminous efficacy: 138 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 78 × 45 × 45 mm
- packaging: 1 pc, small box





E27 | 470 lm | 3.4 W | 25 000 h | Dimmable | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A–G D

8 592920 130469

ZF6D22 | 1/-/10/60

15 25 743 210 | ZF6D22

- replacement of incandescent bulb: 40 W
- shape: Mini Globe
- luminous flux: 470 lm
- color temperature: 4 000 K
- power: 3.4 W
- luminous efficacy: 138 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 78 × 45 × 45 mm
- packaging: 1 pc, small box





E27 | 470 lm | 3.4 W | 25 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A–G D

8 592920 130490

ZF6D23 | 1/-/10/60

15 25 743 403 | ZF6D23

- replacement of incandescent bulb: 60 W
- shape: Mini Globe
- luminous flux: 806 lm
- color temperature: 2 700 K
- power: 5.9 W
- luminous efficacy: 137 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 78 × 45 × 45 mm
- packaging: 1 pc, small box





E27 | 806 lm | 5.9 W | 25 000 h | Dimmable | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A–G D

8 592920 130520

ZF6D42 | 1/-/10/60

15 25 743 211 | ZF6D42

- replacement of incandescent bulb: 60 W
- shape: Mini Globe
- luminous flux: 806 lm
- color temperature: 4 000 K
- power: 5.9 W
- luminous efficacy: 137 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 78 × 45 × 45 mm
- packaging: 1 pc, small box





E27 | 806 lm | 5.9 W | 25 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A–G D

8 592920 130551

ZF6D43 | 1/-/10/60

15 25 743 404 | ZF6D43

- replacement of incandescent bulb: 25 W
- shape: Mini Globe
- luminous flux: 250 lm
- color temperature: 2 700 K
- power: 1.8 W
- luminous efficacy: 139 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 80 × 45 × 45 mm
- packaging: 1 pc, small box





E14 | 250 lm | 1.8 W | 25 000 h | Dimmable | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A–G D

8 592920 130223

ZF1D02 | 1/-/10/60

15 25 731 251 | ZF1D02

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- replacement of incandescent bulb: 25 W
- shape: Mini Globe
- luminous flux: 250 lm
- color temperature: 4 000 K
- power: 1.8 W
- luminous efficacy: 139 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 80 × 45 × 45 mm
- packaging: 1 pc, small box





E14 | 250 lm | 1.8 W | 25 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A↑G D

8 592920 130254

ZF1D03 1/-/10/60

15 25 731 448 ZF1D03

- replacement of incandescent bulb: 40 W
- shape: Mini Globe
- luminous flux: 470 lm
- color temperature: 2 700 K
- power: 3.4 W
- luminous efficacy: 138 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 80 × 45 × 45 mm
- packaging: 1 pc, small box





E14 | 470 lm | 3.4 W | 25 000 h | Dimmable | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A↑G D

8 592920 130285

ZF1D22 1/-/10/60

15 25 731 252 ZF1D22

- replacement of incandescent bulb: 40 W
- shape: Mini Globe
- luminous flux: 470 lm
- color temperature: 4 000 K
- power: 3.4 W
- luminous efficacy: 138 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 80 × 45 × 45 mm
- packaging: 1 pc, small box





E14 | 470 lm | 3.4 W | 25 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A↑G D

8 592920 130315

ZF1D23 1/-/10/60

15 25 731 449 ZF1D23

- replacement of incandescent bulb: 60 W
- shape: Mini Globe
- luminous flux: 806 lm
- color temperature: 2 700 K
- power: 5.9 W
- luminous efficacy: 137 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 80 × 45 × 45 mm
- packaging: 1 pc, small box





E14 | 806 lm | 5.9 W | 25 000 h | Dimmable | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A↑G D

8 592920 130346

ZF1D42 1/-/10/60

15 25 731 253 ZF1D42

- replacement of incandescent bulb: 60 W
- shape: Mini Globe
- luminous flux: 806 lm
- color temperature: 4 000 K
- power: 5.9 W
- luminous efficacy: 137 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 80 × 45 × 45 mm
- packaging: 1 pc, small box





E14 | 806 lm | 5.9 W | 25 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A↑G D

8 592920 130377

ZF1D43 1/-/10/60

15 25 731 450 ZF1D43

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number	Packaging Type

- replacement of incandescent bulb: 25 W
- shape: Candle
- luminous flux: 250 lm
- color temperature: 2 700 K
- power: 1.8 W
- luminous efficacy: 139 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 97 mm
- packaging: 1 pc, small box





E14 | 250 lm | 1.8 W | 25 000 h | Dimmable | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A–G D

8 592920 130018

ZF3D02 | 1/-/10/40
15 25 731 248 | ZF3D02

- replacement of incandescent bulb: 25 W
- shape: Candle
- luminous flux: 250 lm
- color temperature: 4 000 K
- power: 1.8 W
- luminous efficacy: 139 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 97 mm
- packaging: 1 pc, small box





E14 | 250 lm | 1.8 W | 25 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A–G D

8 592920 130070

ZF3D03 | 1/-/10/40
15 25 731 445 | ZF3D03

- replacement of incandescent bulb: 40 W
- shape: Candle
- luminous flux: 470 lm
- color temperature: 2 700 K
- power: 3.4 W
- luminous efficacy: 138 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 97 mm
- packaging: 1 pc, small box





E14 | 470 lm | 3.4 W | 25 000 h | Dimmable | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A–G D

8 592920 130100

ZF3D22 | 1/-/10/40
15 25 731 249 | ZF3D22

- replacement of incandescent bulb: 40 W
- shape: Candle
- luminous flux: 470 lm
- color temperature: 4 000 K
- power: 3.4 W
- luminous efficacy: 138 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 97 mm
- packaging: 1 pc, small box





E14 | 470 lm | 3.4 W | 25 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A–G D

8 592920 130131

ZF3D23 | 1/-/10/40
15 25 731 446 | ZF3D23

- replacement of incandescent bulb: 60 W
- shape: Candle
- luminous flux: 806 lm
- color temperature: 2 700 K
- power: 5.9 W
- luminous efficacy: 137 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 97 mm
- packaging: 1 pc, small box





E14 | 806 lm | 5.9 W | 25 000 h | Dimmable | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A–G D

8 592920 130162

ZF3D42 | 1/-/10/40
15 25 731 250 | ZF3D42

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- replacement of incandescent bulb: 60 W
- shape: Candle
- luminous flux: 806 lm
- color temperature: 4 000 K
- power: 5.9 W
- luminous efficacy: 137 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 97 mm
- packaging: 1 pc, small box





E14 | 806 lm | 5.9 W | 25 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A↑G D

8 592920 130193

ZF3D43 1/-/10/40

15 25 731 447 ZF3D43

- replacement of incandescent bulb: 75 W
- shape: G95
- luminous flux: 1 055 lm
- color temperature: 2 700 K
- power: 7.8 W
- luminous efficacy: 135 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 95 × 95 × 140 mm
- packaging: 1 pc, small box





E27 | 1 055 lm | 7.8 W | 25 000 h | Dimmable | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A↑G D

8 592920 130582

ZF2D52 1/-/-/6

15 25 743 212 ZF2D52

- replacement of incandescent bulb: 75 W
- shape: G95
- luminous flux: 1 055 lm
- color temperature: 4 000 K
- power: 7.8 W
- luminous efficacy: 135 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 95 × 95 × 140 mm
- packaging: 1 pc, small box





E27 | 1 055 lm | 7.8 W | 25 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A↑G D

8 592920 130605

ZF2D53 1/-/-/6

15 25 743 405 ZF2D53

- replacement of incandescent bulb: 100 W
- shape: G125
- luminous flux: 1 521 lm
- color temperature: 2 700 K
- power: 11 W
- luminous efficacy: 138 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 125 × 125 × 178 mm
- packaging: 1 pc, small box





E27 | 1 521 lm | 11 W | 25 000 h | Dimmable | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A↑G D

8 592920 130629

ZF2D62 1/-/-/6

15 25 743 213 ZF2D62

- replacement of incandescent bulb: 100 W
- shape: G125
- luminous flux: 1 521 lm
- color temperature: 4 000 K
- power: 11 W
- luminous efficacy: 138 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 125 × 125 × 178 mm
- packaging: 1 pc, small box





E27 | 1 521 lm | 11 W | 25 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A↑G D

8 592920 130643

ZF2D63 1/-/-/6

15 25 743 406 ZF2D63

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- replacement of incandescent bulb: 150 W
- shape: G125
- luminous flux: 2 452 lm
- color temperature: 2 700 K
- power: 18 W
- luminous efficacy: 136 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 125 × 125 × 178 mm
- packaging: 1 pc, small box





E27 | 2 452 lm | 18 W | 25 000 h | Dimmable | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A↑G D

8 592920 130667

ZF2D82 1/-/-/6

15 25 743 214 ZF2D82

- replacement of incandescent bulb: 150 W
- shape: G125
- luminous flux: 2 452 lm
- color temperature: 4 000 K
- power: 18 W
- luminous efficacy: 136 lm/W
- energy efficiency class: D
- beam angle: 360°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 125 × 125 × 178 mm
- packaging: 1 pc, small box





E27 | 2 452 lm | 18 W | 25 000 h | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A↑G D

8 592920 130681

ZF2D83 1/-/-/6

15 25 743 407 ZF2D83

- replacement of incandescent bulb: 40 W
- shape: A60
- luminous flux: 420 lm
- color temperature: 2 200 K
- power: 4.5 W
- luminous efficacy: 93 lm/W
- energy efficiency class: F
- beam angle: 320°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 108 mm
- packaging: 1 pc, small box





E27 | 420 lm | 4.5 W | 25 000 h | Dimmable | 2 200 K WARM WHITE+ | 3 YEARS WARRANTY | A↑G F


8 592920 133927

Z55032 1/-/10/20

15 25 743 227 Z55032

- replacement of incandescent bulb: 20 W
- shape: Candle
- luminous flux: 225 lm
- color temperature: 2 200 K
- power: 2.5 W
- luminous efficacy: 90 lm/W
- energy efficiency class: F
- beam angle: 320°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 97 mm
- packaging: 1 pc, small box





E14 | 225 lm | 2.5 W | 25 000 h | Dimmable | 2 200 K WARM WHITE+ | 3 YEARS WARRANTY | A↑G F

8 592920 133828

Z53012 1/-/10/40

15 25 743 228 Z53012

- replacement of incandescent bulb: 40 W
- shape: ST64
- luminous flux: 420 lm
- color temperature: 2 200 K
- power: 4.5 W
- luminous efficacy: 93 lm/W
- energy efficiency class: F
- beam angle: 320°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 64 × 64 × 140 mm
- packaging: 1 pc, small box





E27 | 420 lm | 4.5 W | 25 000 h | Dimmable | 2 200 K WARM WHITE+ | 3 YEARS WARRANTY | A↑G F

8 592920 133859

Z57032 1/-/10/20

15 25 743 224 Z57032

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- replacement of incandescent bulb: 40 W
- shape: G95
- luminous flux: 420 lm
- color temperature: 2 200 K
- power: 4.5 W
- luminous efficacy: 93 lm/W
- energy efficiency class: F
- beam angle: 320°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 95 × 95 × 140 mm
- packaging: 1 pc, small box





E27 | 420 lm | 4.5 W | 25 000 h | Dimmable | 2 200 K WARM WHITE+ | 3 YEARS WARRANTY | A↑G F

8 592920 133903

Z52032 1/-/-/6

15 25 743 226 Z52032

- replacement of incandescent bulb: 40 W
- shape: G125
- luminous flux: 420 lm
- color temperature: 2 200 K
- power: 4.5 W
- luminous efficacy: 93 lm/W
- energy efficiency class: F
- beam angle: 320°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 125 × 125 × 178 mm
- packaging: 1 pc, small box





E27 | 420 lm | 4.5 W | 25 000 h | Dimmable | 2 200 K WARM WHITE+ | 3 YEARS WARRANTY | A↑G F

8 592920 133880

Z58032 1/-/-/6

15 25 743 225 Z58032

Classic

- economical light source with an optimal price/quality ratio
- powerful, economical and extremely long lifetime
- 90% energy savings compared to conventional bulbs
- positive effect on human vision and health
- greater concentration of work and lower error rate
- 3 years warranty
- use: modern interiors, commercial and relaxation areas

UV Free | Hg Free | 100 % = 0 s | 230 V~/50 Hz

- replacement of incandescent bulb: 40 W
- shape: A60
- luminous flux: 470 lm
- color temperature: 2 700 K
- power: 4 W
- luminous efficacy: 118 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 107 mm
- packaging: 1 pc, small box





E27 | 470 lm | 4 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 126325

ZQ5E21 1/-/10/20

15 25 733 277 ZQ5E21

- replacement of incandescent bulb: 40 W
- shape: A60
- luminous flux: 470 lm
- color temperature: 4 000 K
- power: 4 W
- luminous efficacy: 118 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 107 mm
- packaging: 1 pc, small box





E27 | 470 lm | 4 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 126356

ZQ5E23 1/-/10/20

15 25 733 470 ZQ5E23

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number	Packaging Type

- replacement of incandescent bulb: 50 W
- shape: A60
- luminous flux: 645 lm
- color temperature: 2 700 K
- power: 5.8 W
- luminous efficacy: 111 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 107 mm
- packaging: 1 pc, small box





E27 | 645 lm | 5.8 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 126387

ZQ5E31 | 1/-/10/20
15 25 733 278 | ZQ5E31

- replacement of incandescent bulb: 50 W
- shape: A60
- luminous flux: 645 lm
- color temperature: 4 000 K
- power: 5.8 W
- luminous efficacy: 111 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 107 mm
- packaging: 1 pc, small box





E27 | 645 lm | 5.8 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 126417

ZQ5E33 | 1/-/10/20
15 25 733 471 | ZQ5E33

- replacement of incandescent bulb: 60 W
- shape: A60
- luminous flux: 806 lm
- color temperature: 2 700 K
- power: 7 W
- luminous efficacy: 115 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 107 mm
- packaging: 1 pc, small box





E27 | 806 lm | 7 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 126448

ZQ5E41 | 1/-/10/20
15 25 733 279 | ZQ5E41

- replacement of incandescent bulb: 60 W
- shape: A60
- luminous flux: 806 lm
- color temperature: 2 700 K
- power: 7 W
- luminous efficacy: 115 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 107 mm
- packaging: 3 pcs, small box





E27 | 806 lm | 7 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 126714

ZQ5E41.3 | 3/-/15/30
15 25 733 282 | ZQ5E41.3

- replacement of incandescent bulb: 60 W
- shape: A60
- luminous flux: 806 lm
- color temperature: 4 000 K
- power: 7 W
- luminous efficacy: 115 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 107 mm
- packaging: 1 pc, small box





E27 | 806 lm | 7 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 126479

ZQ5E43 | 1/-/10/20
15 25 733 472 | ZQ5E43

EMOS
A brand of legrand

www.emos.eu

Order Code / Item Number | Packaging Type

- replacement of incandescent bulb: 60 W
- shape: A60
- luminous flux: 806 lm
- color temperature: 4 000 K
- power: 7 W
- luminous efficacy: 115 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 107 mm
- packaging: 3 pcs, small box




E27 | 806 lm | 7 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 126776

ZQ5E43.3 | 3/-/15/30
15 25 733 475 | ZQ5E43.3

- replacement of incandescent bulb: 60 W
- shape: A60
- luminous flux: 806 lm
- color temperature: 6 500 K
- power: 7 W
- luminous efficacy: 115 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 107 mm
- packaging: 1 pc, small box




E27 | 806 lm | 7 W | Dimmable | 30 000 h | 6 500 K COOL WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 126509

ZQ5E44 | 1/-/10/20
15 25 733 121 | ZQ5E44

- replacement of incandescent bulb: 75 W
- shape: A60
- luminous flux: 1 055 lm
- color temperature: 2 700 K
- power: 9.5 W
- luminous efficacy: 111 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 109 mm
- packaging: 1 pc, small box




E27 | 1 055 lm | 9.5 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 126530

ZQ5E51 | 1/-/10/20
15 25 733 280 | ZQ5E51

- replacement of incandescent bulb: 75 W
- shape: A60
- luminous flux: 1 055 lm
- color temperature: 2 700 K
- power: 9.5 W
- luminous efficacy: 111 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 109 mm
- packaging: 3 pcs, small box




E27 | 1 055 lm | 9.5 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 126837

ZQ5E51.3 | 3/-/15/30
15 25 733 284 | ZQ5E51.3

- replacement of incandescent bulb: 75 W
- shape: A60
- luminous flux: 1 055 lm
- color temperature: 4 000 K
- power: 9.5 W
- luminous efficacy: 111 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 109 mm
- packaging: 1 pc, small box




E27 | 1 055 lm | 9.5 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 126561

ZQ5E53 | 1/-/10/20
15 25 733 473 | ZQ5E53

EMOS
A brand of legrand

www.emos.eu

Order Code / Item Number | Packaging Type

- replacement of incandescent bulb: 75 W
- shape: A60
- luminous flux: 1 055 lm
- color temperature: 4 000 K
- power: 9.5 W
- luminous efficacy: 111 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 109 mm
- packaging: 3 pcs, small box




E27 | 1 055 lm | 9.5 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A–G E

8 592920 126868

ZQ5E53.3 | 3/-/15/30
15 25 733 477 | ZQ5E53.3

- replacement of incandescent bulb: 75 W
- shape: A60
- luminous flux: 1 055 lm
- color temperature: 6 500 K
- power: 9.5 W
- luminous efficacy: 111 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 109 mm
- packaging: 1 pc, small box




E27 | 1 055 lm | 9.5 W | Dimmable | 30 000 h | 6 500 K COOL WHITE | 3 YEARS WARRANTY | A–G E

8 592920 126592

ZQ5E54 | 1/-/10/20
15 25 733 122 | ZQ5E54

- replacement of incandescent bulb: 75 W
- dimmable
- shape: A60
- luminous flux: 1 060 lm
- color temperature: 2 700 K
- power: 10.5 W
- luminous efficacy: 101 lm/W
- energy efficiency class: F
- beam angle: 160°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 120 × 60 × 60 mm
- packaging: 1 pc, small box




E27 | 1 060 lm | 10.5 W | Dimmable 100 %..50 %..10 % | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A–G F | STEP DIMMABLE 100 % 50 % 10 %

8 592920 044360

ZL4206 | 1/-/10/40
15 25 653 206 | ZL4206

- replacement of incandescent bulb: 100 W
- shape: A60
- luminous flux: 1 521 lm
- color temperature: 2 700 K
- power: 13 W
- luminous efficacy: 117 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 120 mm
- packaging: 1 pc, small box




E27 | 1 521 lm | 13 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A–G E

8 592920 126622

ZQ5E61 | 1/-/10/20
15 25 733 281 | ZQ5E61

- replacement of incandescent bulb: 100 W
- shape: A60
- luminous flux: 1 521 lm
- color temperature: 2 700 K
- power: 13 W
- luminous efficacy: 117 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 120 mm
- packaging: 3 pcs, small box




E27 | 1 521 lm | 13 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A–G E

8 592920 126899

ZQ5E61.3 | 3/-/15/30
15 25 733 285 | ZQ5E61.3

EMOS
A brand of legrand

www.emos.eu

Order Code / Item Number | Packaging / Type

- replacement of incandescent bulb: 100 W
- shape: A60
- luminous flux: 1 521 lm
- color temperature: 4 000 K
- power: 13 W
- luminous efficacy: 117 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 120 mm
- packaging: 1 pc, small box




E27 | 1 521 lm | 13 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 126653

ZQ5E63 | 1/-/10/20
15 25 733 474 | ZQ5E63

- replacement of incandescent bulb: 100 W
- shape: A60
- luminous flux: 1 521 lm
- color temperature: 4 000 K
- power: 13 W
- luminous efficacy: 117 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 120 mm
- packaging: 3 pcs, small box




E27 | 1 521 lm | 13 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 126929

ZQ5E63.3 | 3/-/12/24
15 25 733 478 | ZQ5E63.3

- replacement of incandescent bulb: 100 W
- shape: A60
- luminous flux: 1 521 lm
- color temperature: 6 500 K
- power: 13 W
- luminous efficacy: 117 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 120 mm
- packaging: 1 pc, small box




E27 | 1 521 lm | 13 W | Dimmable | 30 000 h | 6 500 K COOL WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 126684

ZQ5E64 | 1/-/10/20
15 25 733 123 | ZQ5E64

- replacement of incandescent bulb: 120 W
- shape: A70
- luminous flux: 1 901 lm
- color temperature: 2 700 K
- power: 16 W
- luminous efficacy: 119 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 71 × 71 × 142 mm
- packaging: 1 pc, small box




E27 | 1 901 lm | 16 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 126950

ZQ5E71 | 1/-/10/20
15 25 733 286 | ZQ5E71

- replacement of incandescent bulb: 120 W
- shape: A70
- luminous flux: 1 901 lm
- color temperature: 4 000 K
- power: 16 W
- luminous efficacy: 119 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 71 × 71 × 142 mm
- packaging: 1 pc, small box




E27 | 1 901 lm | 16 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 126981

ZQ5E73 | 1/-/10/20
15 25 733 479 | ZQ5E73

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- replacement of incandescent bulb: 120 W
- shape: A70
- luminous flux: 1 901 lm
- color temperature: 6 500 K
- power: 16 W
- luminous efficacy: 119 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 71 × 71 × 142 mm
- packaging: 1 pc, small box





E27 | 1 901 lm | 16 W | Dimmable | 30 000 h | 6 500 K COOL WHITE | 3 YEARS WARRANTY | A–G E

8 592920 127018

ZQ5E74 | 1/-/10/20

15 25 733 124 | ZQ5E74

- replacement of incandescent bulb: 150 W
- shape: A80
- luminous flux: 2 452 lm
- color temperature: 2 700 K
- power: 20 W
- luminous efficacy: 123 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 80 × 80 × 156 mm
- packaging: 1 pc, small box





E27 | 2 452 lm | 20 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A–G E

8 592920 127049

ZQ5E81 | 1/-/10/20

15 25 733 287 | ZQ5E81

- replacement of incandescent bulb: 150 W
- shape: A80
- luminous flux: 2 452 lm
- color temperature: 4 000 K
- power: 20 W
- luminous efficacy: 123 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 80 × 80 × 156 mm
- packaging: 1 pc, small box





E27 | 2 452 lm | 20 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A–G E

8 592920 127070

ZQ5E83 | 1/-/10/20

15 25 733 480 | ZQ5E83

- replacement of incandescent bulb: 150 W
- shape: A80
- luminous flux: 2 452 lm
- color temperature: 6 500 K
- power: 20 W
- luminous efficacy: 123 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 80 × 80 × 156 mm
- packaging: 1 pc, small box





E27 | 2 452 lm | 20 W | Dimmable | 30 000 h | 6 500 K COOL WHITE | 3 YEARS WARRANTY | A–G E

8 592920 127100

ZQ5E84 | 1/-/10/20

15 25 733 125 | ZQ5E84

- replacement of incandescent bulb: 200 W
- shape: A95
- luminous flux: 3 452 lm
- color temperature: 2 700 K
- power: 28 W
- luminous efficacy: 123 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 95 × 95 × 178 mm
- packaging: 1 pc, small box





E27 | 3 452 lm | 28 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A–G E

8 592920 130803

ZQ5E91 | 1/-/3/9

15 25 743 215 | ZQ5E91

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- replacement of incandescent bulb: 200 W
- shape: A95
- luminous flux: 3 452 lm
- color temperature: 4 000 K
- power: 28 W
- luminous efficacy: 123 lm/W
- energy efficiency class: E
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 95 × 95 × 178 mm
- packaging: 1 pc, small box





E27 | 3 452 lm | 28 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 130834

ZQ5E93 | 1/-/3/9

15 25 743 408 | ZQ5E93

- replacement of incandescent bulb: 40 W
- shape: R50
- luminous flux: 470 lm
- color temperature: 2 700 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 120°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 83 mm
- packaging: 1 pc, small box





E14 | 470 lm | 4.2 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 128152

ZQ7E21 | 1/-/10/30

15 25 731 243 | ZQ7E21

- replacement of incandescent bulb: 40 W
- shape: R50
- luminous flux: 470 lm
- color temperature: 4 000 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 120°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 83 mm
- packaging: 1 pc, small box





E14 | 470 lm | 4.2 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 128183

ZQ7E23 | 1/-/10/30

15 25 731 442 | ZQ7E23

- replacement of incandescent bulb: 60 W
- shape: R63
- luminous flux: 806 lm
- color temperature: 2 700 K
- power: 7 W
- luminous efficacy: 115 lm/W
- energy efficiency class: E
- beam angle: 120°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 63 × 63 × 97 mm
- packaging: 1 pc, small box





E27 | 806 lm | 7 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 128213

ZQ7E41 | 1/-/10/20

15 25 733 294 | ZQ7E41

- replacement of incandescent bulb: 60 W
- shape: R63
- luminous flux: 806 lm
- color temperature: 4 000 K
- power: 7 W
- luminous efficacy: 115 lm/W
- energy efficiency class: E
- beam angle: 120°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 63 × 63 × 97 mm
- packaging: 1 pc, small box





E27 | 806 lm | 7 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 128244

ZQ7E43 | 1/-/10/20

15 25 733 487 | ZQ7E43

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- replacement of incandescent bulb: 32 W
- shape: Mini Globe
- luminous flux: 350 lm
- color temperature: 2 700 K
- power: 2.5 W
- luminous efficacy: 140 lm/W
- energy efficiency class: D
- beam angle: 150°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 77 mm
- packaging: 1 pc, small box





E27 | 350 lm | 2.5 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A–G D

8 592920 127827

ZQ6D11 | 1/-/10/40

15 25 733 272 | ZQ6D11

- replacement of incandescent bulb: 32 W
- shape: Mini Globe
- luminous flux: 350 lm
- color temperature: 4 000 K
- power: 2.5 W
- luminous efficacy: 140 lm/W
- energy efficiency class: D
- beam angle: 150°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 77 mm
- packaging: 1 pc, small box





E27 | 350 lm | 2.5 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A–G D

8 592920 127858

ZQ6D13 | 1/-/10/40

15 25 733 465 | ZQ6D13

- replacement of incandescent bulb: 40 W
- shape: Mini Globe
- luminous flux: 470 lm
- color temperature: 2 700 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 150°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 77 mm
- packaging: 1 pc, small box





E27 | 470 lm | 4.2 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A–G E

8 592920 127889

ZQ6E21 | 1/-/10/40

15 25 733 291 | ZQ6E21

- replacement of incandescent bulb: 40 W
- shape: Mini Globe
- luminous flux: 470 lm
- color temperature: 2 700 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 150°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 77 mm
- packaging: 3 pcs, small box





E27 | 470 lm | 4.2 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A–G E

8 592920 128091

ZQ6E21.3 | 3/-/15/60

15 25 733 292 | ZQ6E21.3

- replacement of incandescent bulb: 40 W
- shape: Mini Globe
- luminous flux: 470 lm
- color temperature: 4 000 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 150°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 77 mm
- packaging: 1 pc, small box





E27 | 470 lm | 4.2 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A–G E

8 592920 127919

ZQ6E23 | 1/-/10/40

15 25 733 484 | ZQ6E23

EMOS
A brand of legrand

www.emos.eu

Order Code / Item Number | Packaging / Type

- replacement of incandescent bulb: 40 W
- shape: Mini Globe
- luminous flux: 470 lm
- color temperature: 4 000 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 150°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 77 mm
- packaging: 3 pcs, small box



E27 | 470 lm | 4.2 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A–G E

8 592920 128121

ZQ6E23.3 | 3/-/15/60
15 25 733 485 | ZQ6E23.3

- replacement of incandescent bulb: 40 W
- shape: Mini Globe
- luminous flux: 470 lm
- color temperature: 6 500 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 150°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 77 mm
- packaging: 1 pc, small box



E27 | 470 lm | 4.2 W | Dimmable | 30 000 h | 6 500 K COOL WHITE | 3 YEARS WARRANTY | A–G E

8 592920 127940

ZQ6E24 | 1/-/10/40
15 25 733 126 | ZQ6E24

- replacement of incandescent bulb: 60 W
- shape: Mini Globe
- luminous flux: 806 lm
- color temperature: 2 700 K
- power: 6.5 W
- luminous efficacy: 124 lm/W
- energy efficiency class: E
- beam angle: 150°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 77 mm
- packaging: 1 pc, small box



E27 | 806 lm | 6.5 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A–G E

8 592920 127971

ZQ6E41 | 1/-/10/40
15 25 733 293 | ZQ6E41

- replacement of incandescent bulb: 60 W
- shape: Mini Globe
- luminous flux: 806 lm
- color temperature: 4 000 K
- power: 6.5 W
- luminous efficacy: 124 lm/W
- energy efficiency class: E
- beam angle: 150°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 77 mm
- packaging: 1 pc, small box



E27 | 806 lm | 6.5 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A–G E

8 592920 128008

ZQ6E43 | 1/-/10/40
15 25 733 486 | ZQ6E43

- replacement of incandescent bulb: 60 W
- shape: Mini Globe
- luminous flux: 806 lm
- color temperature: 6 500 K
- power: 6.5 W
- luminous efficacy: 124 lm/W
- energy efficiency class: E
- beam angle: 150°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 77 mm
- packaging: 1 pc, small box



E27 | 806 lm | 6.5 W | Dimmable | 30 000 h | 6 500 K COOL WHITE | 3 YEARS WARRANTY | A–G E

8 592920 128039

ZQ6E44 | 1/-/10/40
15 25 733 127 | ZQ6E44

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- replacement of incandescent bulb: 32 W
- shape: Mini Globe
- luminous flux: 350 lm
- color temperature: 2 700 K
- power: 2.5 W
- luminous efficacy: 140 lm/W
- energy efficiency class: D
- beam angle: 150°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 82 mm
- packaging: 1 pc, small box





E14 | 350 lm | 2.5 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A↑G D

8 592920 127551

ZQ1D11 | 1/-/10/40

15 25 731 230 | ZQ1D11

- replacement of incandescent bulb: 32 W
- shape: Mini Globe
- luminous flux: 350 lm
- color temperature: 4 000 K
- power: 2.5 W
- luminous efficacy: 140 lm/W
- energy efficiency class: D
- beam angle: 150°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 82 mm
- packaging: 1 pc, small box





E14 | 350 lm | 2.5 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A↑G D

8 592920 127582

ZQ1D13 | 1/-/10/40

15 25 731 429 | ZQ1D13

- replacement of incandescent bulb: 40 W
- shape: Mini Globe
- luminous flux: 470 lm
- color temperature: 2 700 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 150°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 82 mm
- packaging: 1 pc, small box





E14 | 470 lm | 4.2 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 127612

ZQ1E21 | 1/-/10/40

15 25 731 240 | ZQ1E21

- replacement of incandescent bulb: 40 W
- shape: Mini Globe
- luminous flux: 470 lm
- color temperature: 2 700 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 150°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 82 mm
- packaging: 3 pcs, small box





E14 | 470 lm | 4.2 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 127643

ZQ1E21.3 | 3/-/15/60

15 25 731 241 | ZQ1E21.3

- replacement of incandescent bulb: 40 W
- shape: Mini Globe
- luminous flux: 470 lm
- color temperature: 4 000 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 150°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 82 mm
- packaging: 1 pc, small box





E14 | 470 lm | 4.2 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 127674

ZQ1E23 | 1/-/10/40

15 25 731 439 | ZQ1E23

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number	Packaging Type

- replacement of incandescent bulb: 40 W
- shape: Mini Globe
- luminous flux: 470 lm
- color temperature: 4 000 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 150°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 82 mm
- packaging: 3 pcs, small box



E14 | 470 lm | 4.2 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 128060

ZQ1E23.3 | 3/-/15/60
15 25 731 440 | ZQ1E23.3

- replacement of incandescent bulb: 40 W
- shape: Mini Globe
- luminous flux: 470 lm
- color temperature: 6 500 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 150°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 82 mm
- packaging: 1 pc, small box



E14 | 470 lm | 4.2 W | Dimmable | 30 000 h | 6 500 K COOL WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 127704

ZQ1E24 | 1/-/10/40
15 25 731 112 | ZQ1E24

- replacement of incandescent bulb: 60 W
- shape: Mini Globe
- luminous flux: 806 lm
- color temperature: 2 700 K
- power: 6.5 W
- luminous efficacy: 124 lm/W
- energy efficiency class: E
- beam angle: 150°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 82 mm
- packaging: 1 pc, small box



E14 | 806 lm | 6.5 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 127735

ZQ1E41 | 1/-/10/40
15 25 731 242 | ZQ1E41

- replacement of incandescent bulb: 60 W
- shape: Mini Globe
- luminous flux: 806 lm
- color temperature: 4 000 K
- power: 6.5 W
- luminous efficacy: 124 lm/W
- energy efficiency class: E
- beam angle: 150°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 82 mm
- packaging: 1 pc, small box



E14 | 806 lm | 6.5 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 127766

ZQ1E43 | 1/-/10/40
15 25 731 441 | ZQ1E43

- replacement of incandescent bulb: 60 W
- shape: Mini Globe
- luminous flux: 806 lm
- color temperature: 6 500 K
- power: 6.5 W
- luminous efficacy: 124 lm/W
- energy efficiency class: E
- beam angle: 150°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 82 mm
- packaging: 1 pc, small box



E14 | 806 lm | 6.5 W | Dimmable | 30 000 h | 6 500 K COOL WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 127797

ZQ1E44 | 1/-/10/40
15 25 731 113 | ZQ1E44

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- replacement of incandescent bulb: 32 W
- shape: Candle
- luminous flux: 350 lm
- color temperature: 2 700 K
- power: 2.5 W
- luminous efficacy: 140 lm/W
- energy efficiency class: D
- beam angle: 240°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 105 mm
- packaging: 1 pc, small box





E27 | 350 lm | 2.5 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A↑G D

8 592920 127377

ZQ4D11 | 1/-/10/40

15 25 733 270 | ZQ4D11

- replacement of incandescent bulb: 32 W
- shape: Candle
- luminous flux: 350 lm
- color temperature: 4 000 K
- power: 2.5 W
- luminous efficacy: 140 lm/W
- energy efficiency class: D
- beam angle: 240°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 105 mm
- packaging: 1 pc, small box





E27 | 350 lm | 2.5 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A↑G D

8 592920 127407

ZQ4D13 | 1/-/10/40

15 25 733 463 | ZQ4D13

- replacement of incandescent bulb: 40 W
- shape: Candle
- luminous flux: 470 lm
- color temperature: 2 700 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 240°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 105 mm
- packaging: 1 pc, small box





E27 | 470 lm | 4.2 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 127438

ZQ4E21 | 1/-/10/40

15 25 733 289 | ZQ4E21

- replacement of incandescent bulb: 40 W
- shape: Candle
- luminous flux: 470 lm
- color temperature: 4 000 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 240°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 105 mm
- packaging: 1 pc, small box





E27 | 470 lm | 4.2 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 127469

ZQ4E23 | 1/-/10/40

15 25 733 482 | ZQ4E23

- replacement of incandescent bulb: 32 W
- shape: Candle
- luminous flux: 350 lm
- color temperature: 2 700 K
- power: 2.5 W
- luminous efficacy: 140 lm/W
- energy efficiency class: D
- beam angle: 240°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 103 mm
- packaging: 1 pc, small box





E14 | 350 lm | 2.5 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A↑G D

8 592920 127131

ZQ3D11 | 1/-/10/40

15 25 731 226 | ZQ3D11

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- replacement of incandescent bulb: 32 W
- shape: Candle
- luminous flux: 350 lm
- color temperature: 4 000 K
- power: 2.5 W
- luminous efficacy: 140 lm/W
- energy efficiency class: D
- beam angle: 240°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 103 mm
- packaging: 1 pc, small box





E14 | 350 lm | 2.5 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A↑G D

8 592920 127162

ZQ3D13 | 1/-/10/40

15 25 731 425 | ZQ3D13

- replacement of incandescent bulb: 40 W
- shape: Candle
- luminous flux: 470 lm
- color temperature: 2 700 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 240°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 103 mm
- packaging: 1 pc, small box





E14 | 470 lm | 4.2 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 127193

ZQ3E21 | 1/-/10/40

15 25 731 236 | ZQ3E21

- replacement of incandescent bulb: 40 W
- shape: Candle
- luminous flux: 470 lm
- color temperature: 2 700 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 240°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 103 mm
- packaging: 3 pcs, small box





E14 | 470 lm | 4.2 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 127490

ZQ3E21.3 | 3/-/15/90

15 25 731 237 | ZQ3E21.3

- replacement of incandescent bulb: 40 W
- shape: Candle
- luminous flux: 470 lm
- color temperature: 4 000 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 240°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 103 mm
- packaging: 1 pc, small box





E14 | 470 lm | 4.2 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 127223

ZQ3E23 | 1/-/10/40

15 25 731 435 | ZQ3E23

- replacement of incandescent bulb: 40 W
- shape: Candle
- luminous flux: 470 lm
- color temperature: 4 000 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 240°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 103 mm
- packaging: 3 pcs, small box





E14 | 470 lm | 4.2 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 127520

ZQ3E23.3 | 3/-/15/90

15 25 731 436 | ZQ3E23.3

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- replacement of incandescent bulb: 40 W
- shape: Candle
- luminous flux: 470 lm
- color temperature: 6 500 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 240°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 103 mm
- packaging: 1 pc, small box





E14 | 470 lm | 4.2 W | Dimmable | 30 000 h | 6 500 K COOL WHITE | 3 YEARS WARRANTY | A–G E

8 592920 127254

ZQ3E24 | 1/-/10/40

15 25 731 110 | ZQ3E24

- replacement of incandescent bulb: 60 W
- shape: Candle
- luminous flux: 806 lm
- color temperature: 2 700 K
- power: 6.5 W
- luminous efficacy: 124 lm/W
- energy efficiency class: E
- beam angle: 240°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 103 mm
- packaging: 1 pc, small box





E14 | 806 lm | 6.5 W | Dimmable | 30 000 h | 2 700 K WARM WHITE | 3 YEARS WARRANTY | A–G E

8 592920 127285

ZQ3E41 | 1/-/10/40

15 25 731 238 | ZQ3E41

- replacement of incandescent bulb: 60 W
- shape: Candle
- luminous flux: 806 lm
- color temperature: 4 000 K
- power: 6.5 W
- luminous efficacy: 124 lm/W
- energy efficiency class: E
- beam angle: 240°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 103 mm
- packaging: 1 pc, small box





E14 | 806 lm | 6.5 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A–G E

8 592920 127315

ZQ3E43 | 1/-/10/40

15 25 731 437 | ZQ3E43

- replacement of incandescent bulb: 60 W
- shape: Candle
- luminous flux: 806 lm
- color temperature: 6 500 K
- power: 6.5 W
- luminous efficacy: 124 lm/W
- energy efficiency class: E
- beam angle: 240°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 103 mm
- packaging: 1 pc, small box





E14 | 806 lm | 6.5 W | Dimmable | 30 000 h | 6 500 K COOL WHITE | 3 YEARS WARRANTY | A–G E

8 592920 127346

ZQ3E44 | 1/-/10/40

15 25 731 111 | ZQ3E44

- replacement of incandescent bulb: 32 W
- shape: MR16
- luminous flux: 345 lm
- color temperature: 3 000 K
- power: 3 W
- luminous efficacy: 115 lm/W
- energy efficiency class: E
- beam angle: 100°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 58 mm
- packaging: 1 pc, small box





GU10 | 345 lm | 3 W | Dimmable | 30 000 h | 3 000 K WARM WHITE | 3 YEARS WARRANTY | A–G E

8 592920 128275

ZQ8E12 | 1/-/10/60

15 25 730 229 | ZQ8E12

EMOS
A brand of legrand

www.emos.eu

Order Code / Item Number | Packaging Type

- replacement of incandescent bulb: 32 W
- shape: MR16
- luminous flux: 345 lm
- color temperature: 3 000 K
- power: 3 W
- luminous efficacy: 115 lm/W
- energy efficiency class: E
- beam angle: 100°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 55 mm
- packaging: 1 pc, small box





GU10 | 345 lm | 3 W | Dimmable | 30 000 h | 3 000 K WARM WHITE | 3 YEARS WARRANTY | A–G E

8 592920 128510

ZQ8E17 | 1/-/10/60
15 25 730 232 | ZQ8E17

- replacement of incandescent bulb: 32 W
- shape: MR16
- luminous flux: 345 lm
- color temperature: 3 000 K
- power: 3 W
- luminous efficacy: 115 lm/W
- energy efficiency class: E
- beam angle: 100°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 58 mm
- packaging: 3 pcs, small box





GU10 | 345 lm | 3 W | Dimmable | 30 000 h | 3 000 K WARM WHITE | 3 YEARS WARRANTY | A–G E

8 592920 128633

ZQ8E12.3 | 3/-/15/60
15 25 730 233 | ZQ8E12.3

- replacement of incandescent bulb: 40 W
- shape: MR16
- luminous flux: 535 lm
- color temperature: 4 000 K
- power: 3 W
- luminous efficacy: 210 lm/W
- energy efficiency class: A
- beam angle: 100°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 55 mm
- packaging: 1 pc, small box





GU10 | 535 lm | 3 W | Dimmable | 50 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A–G A | ULTRA EFFICIENT

8 592920 129470

ZQ8338 | 1/-/10/60
15 25 730 423 | ZQ8338

- replacement of incandescent bulb: 32 W
- shape: MR16
- luminous flux: 345 lm
- color temperature: 4 000 K
- power: 3 W
- luminous efficacy: 115 lm/W
- energy efficiency class: E
- beam angle: 100°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 58 mm
- packaging: 1 pc, small box





GU10 | 345 lm | 3 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A–G E

8 592920 128305

ZQ8E13 | 1/-/10/60
15 25 730 424 | ZQ8E13

- replacement of incandescent bulb: 32 W
- shape: MR16
- luminous flux: 345 lm
- color temperature: 4 000 K
- power: 3 W
- luminous efficacy: 115 lm/W
- energy efficiency class: E
- beam angle: 100°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 55 mm
- packaging: 1 pc, small box





GU10 | 345 lm | 3 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A–G E

8 592920 128541

ZQ8E18 | 1/-/10/60
15 25 730 427 | ZQ8E18

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- replacement of incandescent bulb: 32 W
- shape: MR16
- luminous flux: 345 lm
- color temperature: 6 500 K
- power: 3 W
- luminous efficacy: 115 lm/W
- energy efficiency class: E
- beam angle: 100°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 58 mm
- packaging: 1 pc, small box





GU10 | 345 lm | 3 W | Dimmable | 30 000 h | 6 500 K COOL WHITE | 3 YEARS WARRANTY | A–G E

8 592920 128336

ZQ8E14 | 1/-/10/60

15 25 730 114 | ZQ8E14

- replacement of incandescent bulb: 32 W
- shape: MR16
- luminous flux: 345 lm
- color temperature: 6 500 K
- power: 3 W
- luminous efficacy: 115 lm/W
- energy efficiency class: E
- beam angle: 100°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 55 mm
- packaging: 1 pc, small box





GU10 | 345 lm | 3 W | Dimmable | 30 000 h | 6 500 K COOL WHITE | 3 YEARS WARRANTY | A–G E

8 592920 128572

ZQ8E19 | 1/-/10/60

15 25 730 116 | ZQ8E19

- replacement of incandescent bulb: 39 W
- shape: MR16
- luminous flux: 450 lm
- color temperature: 3 000 K
- power: 4 W
- luminous efficacy: 113 lm/W
- energy efficiency class: E
- beam angle: 100°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 58 mm
- packaging: 1 pc, small box





GU10 | 450 lm | 4 W | Dimmable | 30 000 h | 3 000 K WARM WHITE | 3 YEARS WARRANTY | A–G E

8 592920 128367

ZQ8E22 | 1/-/10/60

15 25 730 230 | ZQ8E22

- replacement of incandescent bulb: 39 W
- shape: MR16
- luminous flux: 450 lm
- color temperature: 4 000 K
- power: 4 W
- luminous efficacy: 113 lm/W
- energy efficiency class: E
- beam angle: 100°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 58 mm
- packaging: 1 pc, small box





GU10 | 450 lm | 4 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A–G E

8 592920 128398

ZQ8E23 | 1/-/10/60

15 25 730 425 | ZQ8E23

- replacement of incandescent bulb: 75 W
- shape: MR16
- luminous flux: 565 lm
- color temperature: 4 000 K
- power: 5.8 W
- luminous efficacy: 115 lm/W
- energy efficiency class: E
- beam angle: 36°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 56 mm
- packaging: 1 pc, small box





GU10 | 565 lm | 5.8 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A–G E

8 592920 128602

ZQ8E33N | 1/-/10/60

15 25 730 428 | ZQ8E33N

EMOS
A brand of legrand

www.emos.eu

Order Code / Item Number | Packaging / Type

- replacement of incandescent bulb: 60 W
- dimmable
- shape: MR16
- luminous flux: 800 lm
- color temperature: 3 000 K
- power: 7 W
- luminous efficacy: 114 lm/W
- energy efficiency class: E
- beam angle: 100°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 58 mm
- packaging: 1 pc, small box





GU10 | 800 lm | 7 W | Dimmable | 25 000 h | 3 000 K WARM WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 125205

ZQ8155S | 1/-/10/60

15 25 730 220 | ZQ8155S

- replacement of incandescent bulb: 60 W
- dimmable
- shape: MR16
- luminous flux: 800 lm
- color temperature: 3 000 K
- power: 7 W
- luminous efficacy: 114 lm/W
- energy efficiency class: E
- beam angle: 100°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 58 mm
- packaging: 1 pc, small box





GU10 | 800 lm | 7 W | Dimmable | 25 000 h | 3 000 K WARM WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 125144

ZQ8155D | 1/-/10/60

15 25 730 221 | ZQ8155D

- replacement of incandescent bulb: 60 W
- shape: MR16
- luminous flux: 806 lm
- color temperature: 3 000 K
- power: 7 W
- luminous efficacy: 115 lm/W
- energy efficiency class: E
- beam angle: 100°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 58 mm
- packaging: 1 pc, small box





GU10 | 806 lm | 7 W | Dimmable | 30 000 h | 3 000 K WARM WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 128428

ZQ8E42 | 1/-/10/60

15 25 730 225 | ZQ8E42

- replacement of incandescent bulb: 60 W
- shape: MR16
- luminous flux: 806 lm
- color temperature: 3 000 K
- power: 7 W
- luminous efficacy: 115 lm/W
- energy efficiency class: E
- beam angle: 100°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 58 mm
- packaging: 3 pcs, small box





GU10 | 806 lm | 7 W | Dimmable | 30 000 h | 3 000 K WARM WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 128664

ZQ8E42.3 | 3/-/15/60

15 25 730 228 | ZQ8E42.3

- replacement of incandescent bulb: 60 W
- dimmable
- shape: MR16
- luminous flux: 800 lm
- color temperature: 4 000 K
- power: 7 W
- luminous efficacy: 114 lm/W
- energy efficiency class: E
- beam angle: 100°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 58 mm
- packaging: 1 pc, small box





GU10 | 800 lm | 7 W | Dimmable | 25 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 125236

ZQ8255S | 1/-/10/60

15 25 730 415 | ZQ8255S

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- replacement of incandescent bulb: 60 W
- dimmable
- shape: MR16
- luminous flux: 800 lm
- color temperature: 4 000 K
- power: 7 W
- luminous efficacy: 114 lm/W
- energy efficiency class: E
- beam angle: 100°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 58 mm
- packaging: 1 pc, small box





GU10 | 800 lm | 7 W | Dimmable | 25 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 125175

ZQ8255D 1/-/10/60

15 25 730 416 ZQ8255D

- replacement of incandescent bulb: 60 W
- shape: MR16
- luminous flux: 806 lm
- color temperature: 4 000 K
- power: 7 W
- luminous efficacy: 115 lm/W
- energy efficiency class: E
- beam angle: 100°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 58 mm
- packaging: 1 pc, small box





GU10 | 806 lm | 7 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 128459

ZQ8E43 1/-/10/60

15 25 730 419 ZQ8E43

- replacement of incandescent bulb: 60 W
- shape: MR16
- luminous flux: 806 lm
- color temperature: 4 000 K
- power: 7 W
- luminous efficacy: 115 lm/W
- energy efficiency class: E
- beam angle: 100°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 58 mm
- packaging: 3 pcs, small box





GU10 | 806 lm | 7 W | Dimmable | 30 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 128695

ZQ8E43.3 3/-/15/60

15 25 730 422 ZQ8E43.3

- replacement of incandescent bulb: 60 W
- shape: MR16
- luminous flux: 806 lm
- color temperature: 6 500 K
- power: 7 W
- luminous efficacy: 115 lm/W
- energy efficiency class: E
- beam angle: 100°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 58 mm
- packaging: 1 pc, small box





GU10 | 806 lm | 7 W | Dimmable | 30 000 h | 6 500 K COOL WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 128480

ZQ8E44 1/-/10/60

15 25 730 112 ZQ8E44

- replacement of incandescent bulb: 40 W
- dimmable
- shape: JC
- luminous flux: 470 lm
- color temperature: 3 000 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 300°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 18 × 18 × 60 mm
- packaging: 1 pc, small box





G9 | 470 lm | 4.2 W | Dimmable | 25 000 h | 3 000 K WARM WHITE | 3 YEARS WARRANTY | A↑G E

8 592920 125328

ZQ9125D 1/-/10/60

15 25 736 211 ZQ9125D

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- replacement of incandescent bulb: 40 W
- dimmable
- shape: JC
- luminous flux: 470 lm
- color temperature: 4 000 K
- power: 4.2 W
- luminous efficacy: 112 lm/W
- energy efficiency class: E
- beam angle: 300°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 18 × 18 × 60 mm
- packaging: 1 pc, small box





G9 | 470 lm | 4.2 W | Dimmable | 25 000 h | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | A–G E

8 592920 125359

ZQ9225D 1/-/10/60

15 25 736 411 ZQ9225D

Basic

- most popular bulb types, found in most households
- economical replacement for obsolete tungsten filament bulbs
- low price and power consumption yet high efficiency
- lights up to 100 % immediately after pressing the switch

UV Free | Hg Free | 100 % = 0 s | 230 V~/50 Hz

- replacement of incandescent bulb: 60 W
- shape: A60
- luminous flux: 806 lm
- color temperature: 3 000 K
- power: 9.4 W
- luminous efficacy: 86 lm/W
- energy efficiency class: F
- beam angle: 200°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 110 (max.) mm
- packaging: 1 pc, small box





E27 | 806 lm | 9.4 W | Dimmable | 3 000 K WARM WHITE | A–G F

8 592920 134054

ZL5F42 1/-/10/30

15 25 733 296 ZL5F42

- replacement of incandescent bulb: 60 W
- shape: A60
- luminous flux: 806 lm
- color temperature: 3 000 K
- power: 9.4 W
- luminous efficacy: 86 lm/W
- energy efficiency class: F
- beam angle: 200°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 110 (max.) mm
- packaging: 3 pcs, small box





E27 | 806 lm | 9.4 W | Dimmable | 3 000 K WARM WHITE | A–G F

8 592920 134238

ZL5F42.3 3/-/15/45

15 25 733 299 ZL5F42.3

- replacement of incandescent bulb: 60 W
- shape: A60
- luminous flux: 806 lm
- color temperature: 3 000 K
- power: 9.4 W
- luminous efficacy: 86 lm/W
- energy efficiency class: F
- beam angle: 200°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 110 (max.) mm
- packaging: 6 pcs, small box





E27 | 806 lm | 9.4 W | Dimmable | 3 000 K WARM WHITE | A–G F

8 592920 134290

ZL5F42.6 6/-/-/48

15 25 743 200 ZL5F42.6

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- replacement of incandescent bulb: 60 W
- shape: A60
- luminous flux: 806 lm
- color temperature: 4 000 K
- power: 9.4 W
- luminous efficacy: 86 lm/W
- energy efficiency class: F
- beam angle: 200°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 110 (max.) mm
- packaging: 1 pc, small box





E27 | 806 lm | 9.4 W | Dimmable | 4 000 K NEUTRAL WHITE | A↑G F

8 592920 134085

ZL5F43 | 1/-/10/30
15 25 733 492 | ZL5F43

- replacement of incandescent bulb: 60 W
- shape: A60
- luminous flux: 806 lm
- color temperature: 4 000 K
- power: 9.4 W
- luminous efficacy: 86 lm/W
- energy efficiency class: F
- beam angle: 200°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 110 (max.) mm
- packaging: 3 pcs, small box





E27 | 806 lm | 9.4 W | Dimmable | 4 000 K NEUTRAL WHITE | A↑G F

8 592920 134269

ZL5F43.3 | 3/-/15/45
15 25 733 495 | ZL5F43.3

- replacement of incandescent bulb: 60 W
- shape: A60
- luminous flux: 806 lm
- color temperature: 4 000 K
- power: 9.4 W
- luminous efficacy: 86 lm/W
- energy efficiency class: F
- beam angle: 200°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 110 (max.) mm
- packaging: 6 pcs, small box





E27 | 806 lm | 9.4 W | Dimmable | 4 000 K NEUTRAL WHITE | A↑G F

8 592920 134313

ZL5F43.6 | 6/-/-/48
15 25 733 496 | ZL5F43.6

- replacement of incandescent bulb: 75 W
- shape: A60
- luminous flux: 1 055 lm
- color temperature: 3 000 K
- power: 12.4 W
- luminous efficacy: 85 lm/W
- energy efficiency class: F
- beam angle: 200°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 110 (max.) mm
- packaging: 1 pc, small box





E27 | 1 055 lm | 12.4 W | Dimmable | 3 000 K WARM WHITE | A↑G F

8 592920 134894

ZL5F52 | 1/-/10/30
15 25 743 229 | ZL5F52

- replacement of incandescent bulb: 75 W
- shape: A60
- luminous flux: 1 055 lm
- color temperature: 4 000 K
- power: 12.4 W
- luminous efficacy: 85 lm/W
- energy efficiency class: F
- beam angle: 200°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 110 (max.) mm
- packaging: 1 pc, small box





E27 | 1 055 lm | 12.4 W | Dimmable | 4 000 K NEUTRAL WHITE | A↑G F

8 592920 134955

ZL5F53 | 1/-/10/30
15 25 743 411 | ZL5F53

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number	Packaging Type

- replacement of incandescent bulb: 100 W
- shape: A60
- luminous flux: 1 521 lm
- color temperature: 3 000 K
- power: 17.8 W
- luminous efficacy: 85 lm/W
- energy efficiency class: F
- beam angle: 200°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 125 (max.) mm
- packaging: 1 pc, small box





E27 | 1 521 lm | 17.8 W | Dimmable | 3 000 K WARM WHITE | A↑G F

8 592920 134924

ZL5F62 | 1/-/10/30

15 25 743 230 | ZL5F62

- replacement of incandescent bulb: 100 W
- shape: A60
- luminous flux: 1 521 lm
- color temperature: 4 000 K
- power: 17.8 W
- luminous efficacy: 85 lm/W
- energy efficiency class: F
- beam angle: 200°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 125 (max.) mm
- packaging: 1 pc, small box





E27 | 1 521 lm | 17.8 W | Dimmable | 4 000 K NEUTRAL WHITE | A↑G F

8 592920 134986

ZL5F63 | 1/-/10/30

15 25 743 412 | ZL5F63

- replacement of incandescent bulb: 40 W
- shape: Mini Globe
- luminous flux: 470 lm
- color temperature: 3 000 K
- power: 5.5 W
- luminous efficacy: 85 lm/W
- energy efficiency class: F
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 82 (max.) mm
- packaging: 1 pc, small box





E27 | 470 lm | 5.5 W | Dimmable | 3 000 K WARM WHITE | A↑G F

8 592920 134481

ZL6F22 | 1/-/10/60

15 25 743 202 | ZL6F22

- replacement of incandescent bulb: 40 W
- shape: Mini Globe
- luminous flux: 470 lm
- color temperature: 3 000 K
- power: 5.5 W
- luminous efficacy: 85 lm/W
- energy efficiency class: F
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 82 (max.) mm
- packaging: 1 pc, small box





E14 | 470 lm | 5.5 W | Dimmable | 3 000 K WARM WHITE | A↑G F

8 592920 134450

ZL1F22 | 1/-/10/60

15 25 731 246 | ZL1F22

- replacement of incandescent bulb: 60 W
- shape: Mini Globe
- luminous flux: 806 lm
- color temperature: 3 000 K
- power: 9.4 W
- luminous efficacy: 86 lm/W
- energy efficiency class: F
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 82 (max.) mm
- packaging: 1 pc, small box





E14 | 806 lm | 9.4 W | Dimmable | 3 000 K WARM WHITE | A↑G F

8 592920 134511

ZL1F42 | 1/-/10/60

15 25 731 247 | ZL1F42

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number	Packaging Type

- replacement of incandescent bulb: 60 W
- shape: Mini Globe
- luminous flux: 806 lm
- color temperature: 4 000 K
- power: 9.4 W
- luminous efficacy: 86 lm/W
- energy efficiency class: F
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 45 × 45 × 82 (max.) mm
- packaging: 1 pc, small box





E14 | 806 lm | 9.4 W | Dimmable | 4 000 K NEUTRAL WHITE | A↑G F

8 592920 134542

ZL1F43 | 1/-/10/60
15 25 731 444 | ZL1F43

- replacement of incandescent bulb: 40 W
- shape: Candle
- luminous flux: 470 lm
- color temperature: 3 000 K
- power: 5.5 W
- luminous efficacy: 85 lm/W
- energy efficiency class: F
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 105 (max.) mm
- packaging: 1 pc, small box





E27 | 470 lm | 5.5 W | Dimmable | 4 000 K NEUTRAL WHITE | A↑G F

8 592920 134368

ZL4F22 | 1/-/10/60
15 25 743 201 | ZL4F22

- replacement of incandescent bulb: 40 W
- shape: Candle
- luminous flux: 470 lm
- color temperature: 3 000 K
- power: 5.5 W
- luminous efficacy: 85 lm/W
- energy efficiency class: F
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 105 (max.) mm
- packaging: 1 pc, small box





E14 | 470 lm | 5.5 W | Dimmable | 3 000 K WARM WHITE | A↑G F

8 592920 134337

ZL3F22 | 1/-/10/60
15 25 731 244 | ZL3F22

- replacement of incandescent bulb: 60 W
- shape: Candle
- luminous flux: 806 lm
- color temperature: 3 000 K
- power: 9.4 W
- luminous efficacy: 86 lm/W
- energy efficiency class: F
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 110 (max.) mm
- packaging: 1 pc, small box





E14 | 806 lm | 9.4 W | Dimmable | 3 000 K WARM WHITE | A↑G F

8 592920 134399

ZL3F42 | 1/-/10/60
15 25 731 245 | ZL3F42

- replacement of incandescent bulb: 60 W
- shape: Candle
- luminous flux: 806 lm
- color temperature: 4 000 K
- power: 9.4 W
- luminous efficacy: 86 lm/W
- energy efficiency class: F
- beam angle: 180°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 35 × 35 × 110 (max.) mm
- packaging: 1 pc, small box





E14 | 806 lm | 9.4 W | Dimmable | 4 000 K NEUTRAL WHITE | A↑G F

8 592920 134429

ZL3F43 | 1/-/10/60
15 25 731 443 | ZL3F43

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- replacement of incandescent bulb: 25 W
- shape: MR16
- luminous flux: 250 lm
- color temperature: 3 000 K
- power: 2.9 W
- luminous efficacy: 86 lm/W
- energy efficiency class: F
- beam angle: 110°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 58 (max.) mm
- packaging: 1 pc, small box





GU10 | 250 lm | 2.9 W | Dimmable | 3 000 K WARM WHITE | A↑G F

8 592920 134573

ZL8F02 | 1/-/10/90

15 25 730 234 | ZL8F02

- replacement of incandescent bulb: 25 W
- shape: MR16
- luminous flux: 250 lm
- color temperature: 4 000 K
- power: 2.9 W
- luminous efficacy: 86 lm/W
- energy efficiency class: F
- beam angle: 110°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 58 (max.) mm
- packaging: 1 pc, small box





GU10 | 250 lm | 2.9 W | Dimmable | 4 000 K NEUTRAL WHITE | A↑G F

8 592920 134603

ZL8F03 | 1/-/10/90

15 25 730 429 | ZL8F03

- replacement of incandescent bulb: 40 W
- shape: MR16
- luminous flux: 450 lm
- color temperature: 3 000 K
- power: 5.2 W
- luminous efficacy: 87 lm/W
- energy efficiency class: F
- beam angle: 110°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 58 (max.) mm
- packaging: 1 pc, small box





GU10 | 450 lm | 5.2 W | Dimmable | 3 000 K WARM WHITE | A↑G F

8 592920 134634

ZL8F22 | 1/-/10/90

15 25 730 235 | ZL8F22

- replacement of incandescent bulb: 40 W
- shape: MR16
- luminous flux: 450 lm
- color temperature: 4 000 K
- power: 5.2 W
- luminous efficacy: 87 lm/W
- energy efficiency class: F
- beam angle: 110°
- color rendering index (CRI): Ra >80

- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 58 (max.) mm
- packaging: 1 pc, small box





GU10 | 450 lm | 5.2 W | Dimmable | 4 000 K NEUTRAL WHITE | A↑G F

8 592920 134665

ZL8F23 | 1/-/10/90

15 25 730 430 | ZL8F23

EMOS
A brand of legrand

www.emos.eu | Order Code Item Number | Packaging Type

GoSmart Bulbs

EMOS GoSmart

- Remote light on/off
- Brightness, light colour and chromaticity temperature control
- Energy saving with automatic switch-off and dimming options
- Set unique lighting scenes for different activities
- Easy to install and create automations
- Connection to the home network via WIFI protocol
- Compatibility with EMOS GoSmart products and TUYA devices
- Voice control with Google Assistant and Amazon Alexa

Powered by

Works with Alexa, Google Assistant

Download on the App Store | GET IT ON Google Play

- replacement of incandescent bulb: 60 W
- dimmable
- shape: A60
- luminous flux: 806 lm
- color temperature: 2 700–6 500 K
- power: 9 W
- luminous efficacy: 90 lm/W
- energy efficiency class: F
- beam angle: 200°

- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 120 mm
- packaging: 1 pc, small box
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi
- control by voice assistants
- notifications to the mobile app





Wi Fi | E27 | 806 lm | 9 W | DIMMABLE 10 % – 100 % | CCT | RGB

8 592920 120125

ZQW514R | 1/-/10/40

15 20 503 500 | ZQW514R

- replacement of incandescent bulb: 75 W
- dimmable
- shape: A60
- luminous flux: 1 050 lm
- color temperature: 2 700–6 500 K
- power: 11 W
- luminous efficacy: 95 lm/W
- energy efficiency class: F
- beam angle: 200°

- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 125 mm
- packaging: 1 pc, small box
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi
- control by voice assistants
- notifications to the mobile app





Wi Fi | E27 | 1 050 lm | 11 W | DIMMABLE 10 % – 100 % | CCT | RGB

8 592920 120156

ZQW515R | 1/-/10/40

15 20 503 501 | ZQW515R

- replacement of incandescent bulb: 94 W
- dimmable
- shape: A65
- luminous flux: 1 400 lm
- color temperature: 2 700–6 500 K
- power: 14 W
- luminous efficacy: 100 lm/W
- energy efficiency class: F
- beam angle: 200°

- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 65 × 65 × 134 mm
- packaging: 1 pc, small box
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi
- control by voice assistants
- notifications to the mobile app





Wi Fi | E27 | 1 400 lm | 14 W | DIMMABLE 10 % – 100 % | CCT | RGB

8 592920 120187

ZQW516R | 1/-/10/40

15 20 503 502 | ZQW516R

- replacement of incandescent bulb: 40 W
- dimmable
- shape: Candle
- luminous flux: 470 lm
- color temperature: 2 700–6 500 K
- power: 4.8 W
- luminous efficacy: 98 lm/W
- energy efficiency class: F
- beam angle: 180°

- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 37 × 37 × 110 mm
- packaging: 1 pc, small box
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi
- control by voice assistants
- notifications to the mobile app





Wi Fi | E14 | 470 lm | 4.8 W | DIMMABLE 10 % – 100 % | CCT | RGB

8 592920 120217

ZQW322R | 1/-/10/60

15 25 501 500 | ZQW322R

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- replacement of incandescent bulb: 35 W
- dimmable
- shape: MR16
- luminous flux: 400 lm
- color temperature: 2 700–6 500 K
- power: 4.8 W
- luminous efficacy: 83 lm/W
- energy efficiency class: G
- beam angle: 120°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 56.5 mm
- packaging: 1 pc, small box
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi
- control by voice assistants
- notifications to the mobile app





Wi Fi | GU10 | 400 lm | 4.8 W | DIMMABLE 10 % – 100 % | CCT | RGB

8 592920 120248

ZQW832R | 1/-/10/90

15 25 500 500 | ZQW832R

- replacement of incandescent bulb: 60 W
- dimmable
- shape: A60
- luminous flux: 806 lm
- color temperature: 2 700–6 500 K
- power: 9 W
- luminous efficacy: 90 lm/W
- energy efficiency class: F
- beam angle: 200°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 120 mm
- packaging: 1 pc, small box
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Zigbee 3.0
- control by voice assistants
- notifications to the mobile app





ZigBee 3.0 | 806 lm | E27 | 9 W | DIMMABLE 10 % – 100 % | CCT | RGB

8 592920 121078

ZQZ514R | 1/-/10/40

15 25 753 500 | ZQZ514R

- replacement of incandescent bulb: 75 W
- dimmable
- shape: A60
- luminous flux: 1 050 lm
- color temperature: 2 700–6 500 K
- power: 11 W
- luminous efficacy: 95 lm/W
- energy efficiency class: F
- beam angle: 200°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 60 × 60 × 125 mm
- packaging: 1 pc, small box
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Zigbee 3.0
- control by voice assistants
- notifications to the mobile app





ZigBee 3.0 | 1 050 lm | E27 | 11 W | DIMMABLE 10 % – 100 % | CCT | RGB

8 592920 121108

ZQZ515R | 1/-/10/40

15 25 753 501 | ZQZ515R

- replacement of incandescent bulb: 94 W
- dimmable
- shape: A65
- luminous flux: 1 400 lm
- color temperature: 2 700–6 500 K
- power: 14 W
- luminous efficacy: 100 lm/W
- energy efficiency class: F
- beam angle: 200°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 65 × 65 × 134 mm
- packaging: 1 pc, small box
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Zigbee 3.0
- control by voice assistants
- notifications to the mobile app





ZigBee 3.0 | 1 400 lm | E27 | 14 W | DIMMABLE 10 % – 100 % | CCT | RGB

8 592920 121139

ZQZ516R | 1/-/10/40

15 25 753 502 | ZQZ516R

- replacement of incandescent bulb: 40 W
- dimmable
- shape: Candle
- luminous flux: 470 lm
- color temperature: 2 700–6 500 K
- power: 4.8 W
- luminous efficacy: 98 lm/W
- energy efficiency class: F
- beam angle: 180°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 37 × 37 × 110 mm
- packaging: 1 pc, small box
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Zigbee 3.0
- control by voice assistants
- notifications to the mobile app





ZigBee 3.0 | 470 lm | E14 | 4.8 W | DIMMABLE 10 % – 100 % | CCT | RGB

8 592920 121160

ZQZ322R | 1/-/10/60

15 25 751 500 | ZQZ322R

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- replacement of incandescent bulb: 35 W
- dimmable
- shape: MR16
- luminous flux: 400 lm
- color temperature: 2 700–6 500 K
- power: 4.8 W
- luminous efficacy: 83 lm/W
- energy efficiency class: G
- beam angle: 120°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 50 × 50 × 56.5 mm
- packaging: 1 pc, small box
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Zigbee 3.0
- control by voice assistants
- notifications to the mobile app





ZigBee 3.0 | 400 lm | GU10 | 4.8 W | DIMMABLE 10 % – 100 % | CCT | RGB

8 592920 121191

ZQZ832R 1/-/10/90

15 25 750 500 ZQZ832R

Light sources

Light bulbs for electrical appliances

- energy-saving LED and classic bulbs for kitchen appliances
- shape adapted for use in various household appliances
- with E14 lamp cap
- bulb for oven, can withstand up to 300 °C

- replacement of incandescent bulb: 17 W
- shape: ST26
- luminous flux: 160 lm
- color temperature: 4 000 K
- power: 1.8 W
- luminous efficacy: 89 lm/W
- energy efficiency class: F
- beam angle: 150°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 58 × 27 × 27 mm
- packaging: 1 pc, small box





E14 | 160 lm | 1.8 W | Dimmable | 30 000 h | NEUTRAL WHITE | 3 YEARS WARRANTY | A↑G F

8 592920 064399

Z6913 1/-/10/100

15 24 014 013 LED-FR-1,6W-NW

- replacement of incandescent bulb: 40 W
- shape: JC
- luminous flux: 465 lm
- color temperature: 3 000 K
- power: 4.5 W
- luminous efficacy: 103 lm/W
- energy efficiency class: F
- beam angle: 300°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 58 × 20 × 20 mm
- packaging: 1 pc, small box





E14 | 465 lm | 4.5 W | Dimmable | 30 000 h | WARM WHITE | 3 YEARS WARRANTY | A↑G F

8 592920 068359

ZQ9140 1/-/10/60

15 25 731 208 ZQ9140

EMOS A brand of legrand | www.emos.eu | Order Code Item Number | Packaging Type

- replacement of incandescent bulb: 40 W
- shape: JC
- luminous flux: 465 lm
- color temperature: 4 000 K
- power: 4.5 W
- luminous efficacy: 103 lm/W
- energy efficiency class: F
- beam angle: 300°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 58 × 20 × 20 mm
- packaging: 1 pc, small box





E14 | 465 lm | 4.5 W | Dimmable | 30 000 h | NEUTRAL WHITE | 3 YEARS WARRANTY | A↑G F

8 592920 068380

ZQ9141 | 1/-/10/60

15 25 731 407 | ZQ9141

- type: special lamp for oven
- voltage: 230 V
- power: 15 W
- color temperature: 300 °C
- socket (bulb holder): E14
- luminous flux: 58 lm
- packaging: 1 pc, box
- dimensions: 23 × 45 mm





E14 | 58 lm | 15 W | 1 000 h | 300 °C

8 595025 362643

Z6911 | 1/-/10/300

15 24 115 010 | Z2

- type: fume hood bulb
- voltage: 230 V
- power: 40 W
- socket (bulb holder): E14
- luminous flux: 400 lm
- packaging: 1 pc, box
- dimensions: 25 × 82 mm





E14 | 400 lm | 40 W | 1 000 h

8 595209 900944

C5109 | 1/-/-/100

31 32 510 900 | ADR 230-240V 40W/E14

ECO halogen

- more energy-efficient version of classic tungsten fibre bulb
- lights up to 100 % immediately after pressing the switch
- smooth dimming capability (when used with suitable dimmer)

- replacement of incandescent bulb: 94 W
- dimmable
- shape: J78
- luminous flux: 1 400 lm
- color temperature: 3 000 K
- power: 80 W
- luminous efficacy: 18 lm/W
- energy efficiency class: G
- beam angle: 360°
- color rendering index (CRI): Ra >99
- voltage: 230 V~/50 Hz
- dimensions: 8 × 78 × 8 mm
- packaging: 1 pc, small box





R7s | 1 400 lm | 80 W | Dimmable | 2 000 h | WARM WHITE | A↑G G

8 595025 370891

ZE0101 | 1/10/50/500

15 27 000 800 | ECL 80-J78

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- replacement of incandescent bulb: 139 W
- dimmable
- shape: J78
- luminous flux: 2 250 lm
- color temperature: 3 000 K
- power: 120 W
- luminous efficacy: 19 lm/W
- energy efficiency class: G
- beam angle: 360°
- color rendering index (CRI): Ra >99
- voltage: 230 V~/50 Hz
- dimensions: 8 × 78 × 8 mm
- packaging: 1 pc, small box



R7s | 2 250 lm | 120 W | Dimmable | 2 000 h | WARM WHITE | A↑G G

8 595025 370921

ZE0102 | 1/10/50/300
15 27 001 200 | ECL 120-J78

- replacement of incandescent bulb: 161 W
- dimmable
- shape: J118
- luminous flux: 2 680 lm
- color temperature: 3 000 K
- power: 140 W
- luminous efficacy: 19 lm/W
- energy efficiency class: G
- beam angle: 360°
- color rendering index (CRI): Ra >99
- voltage: 230 V~/50 Hz
- dimensions: 10 × 118 × 10 mm
- packaging: 1 pc, small box



R7s | 2 680 lm | 140 W | Dimmable | 2 000 h | WARM WHITE | A↑G G

8 592920 104026

ZE0203 | 1/10/50/250
15 27 101 400 | ZE0203

Light sources

LED tubes, tubes

PROFI PLUS

- designed for professional replacement of fluorescent tubes
- high luminous efficacy up to 150 lm/W
- high energy saving
- increased service life
- 5 years warranty
- use: administrative and industrial premises

- shape: T8
- luminous flux: 1 100 lm
- color temperature: 4 000 K
- power: 7.3 W
- luminous efficacy: 151 lm/W
- energy efficiency class: D
- beam angle: 260°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 27 × 603 × 27 mm
- packaging: 10 pcs, small box



G13 | 1 100 lm | 7.3 W | 50 000 h | NEUTRAL WHITE | A↑G D | 5 YEARS WARRANTY

8 592920 104187

Z73215 | 10/-/-/10
15 35 235 000 | Z73215

EMOS
A brand of legrand

www.emos.eu

Order Code / Item Number | Packaging / Type

- shape: T8
- luminous flux: 1 100 lm
- color temperature: 6 500 K
- power: 7.3 W
- luminous efficacy: 151 lm/W
- energy efficiency class: D
- beam angle: 260°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz

- dimensions: 27 × 603 × 27 mm
- packaging: 10 pcs, small box



G13 | 1 100 lm | 7.3 W | 50 000 h | COOL WHITE | A–G D | 5 YEARS WARRANTY

8 592920 104200

Z73216 | 10/-/-/10
15 35 236 000 | Z73216

- shape: T8
- luminous flux: 2 100 lm
- color temperature: 4 000 K
- power: 14 W
- luminous efficacy: 150 lm/W
- energy efficiency class: D
- beam angle: 260°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz

- dimensions: 27 × 1213 × 27 mm
- packaging: 10 pcs, small box



G13 | 2 100 lm | 14 W | 50 000 h | NEUTRAL WHITE | A–G D | 5 YEARS WARRANTY

8 592920 104224

Z73225 | 10/-/-/10
15 35 237 000 | Z73225

- shape: T8
- luminous flux: 2 100 lm
- color temperature: 6 500 K
- power: 14 W
- luminous efficacy: 150 lm/W
- energy efficiency class: D
- beam angle: 260°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz

- dimensions: 27 × 1213 × 27 mm
- packaging: 10 pcs, small box



G13 | 2 100 lm | 14 W | 50 000 h | COOL WHITE | A–G D | 5 YEARS WARRANTY

8 592920 104248

Z73226 | 10/-/-/10
15 35 238 000 | Z73226

- shape: T8
- luminous flux: 3 100 lm
- color temperature: 4 000 K
- power: 20.6 W
- luminous efficacy: 150 lm/W
- energy efficiency class: D
- beam angle: 260°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz

- dimensions: 27 × 1514 × 27 mm
- packaging: 10 pcs, small box



G13 | 3 100 lm | 20.6 W | 50 000 h | NEUTRAL WHITE | A–G D | 5 YEARS WARRANTY

8 592920 104262

Z73235 | 10/-/-/10
15 35 239 000 | Z73235

- shape: T8
- luminous flux: 3 100 lm
- color temperature: 6 500 K
- power: 20.6 W
- luminous efficacy: 150 lm/W
- energy efficiency class: D
- beam angle: 260°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz

- dimensions: 27 × 1514 × 27 mm
- packaging: 10 pcs, small box



G13 | 3 100 lm | 20.6 W | 50 000 h | COOL WHITE | A–G D | 5 YEARS WARRANTY

8 592920 104286

Z73236 | 10/-/-/10
15 35 240 000 | Z73236

BASIC

- designed to replace conventional fluorescent tubes
- they are characterized by luminous efficacy up to 100 lm/W
- high energy saving
- long service life
- favourable price/quality ratio
- use: administrative and industrial premises

- shape: T8
- luminous flux: 900 lm
- color temperature: 4 000 K
- power: 9.4 W
- luminous efficacy: 96 lm/W
- energy efficiency class: F
- beam angle: 260°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz

- dimensions: 600 × 26 × 26 mm
- packaging: 25 pc, small box





8 592920 115367

Z73113 25/-/-/25
15 35 241 000 Z73113

- shape: T8
- luminous flux: 900 lm
- color temperature: 6 500 K
- power: 9.4 W
- luminous efficacy: 96 lm/W
- energy efficiency class: F
- beam angle: 260°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz

- dimensions: 600 × 26 × 26 mm
- packaging: 25 pc, small box





8 592920 115381

Z73114 25/-/-/25
15 35 242 000 Z73114

- shape: T8
- luminous flux: 1 800 lm
- color temperature: 4 000 K
- power: 17.8 W
- luminous efficacy: 101 lm/W
- energy efficiency class: F
- beam angle: 260°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz

- dimensions: 1 200 × 26 × 26 mm
- packaging: 25 pc, small box





8 592920 115404

Z73123 25/-/-/25
15 35 243 000 Z73123

- shape: T8
- luminous flux: 1 800 lm
- color temperature: 6 500 K
- power: 17.8 W
- luminous efficacy: 101 lm/W
- energy efficiency class: F
- beam angle: 260°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz

- dimensions: 1 200 × 26 × 26 mm
- packaging: 25 pc, small box





8 592920 115428

Z73124 25/-/-/25
15 35 244 000 Z73124

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- shape: T8
- luminous flux: 2 500 lm
- color temperature: 4 000 K
- power: 24.3 W
- luminous efficacy: 103 lm/W
- energy efficiency class: F
- beam angle: 260°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 1 500 × 26 × 26 mm
- packaging: 25 pc, small box



G13 | 2 500 lm | 24.3 W | 20 000 h | NEUTRAL WHITE | A–G F

8 592920 115442

Z73133 | 25/-/-/25
15 35 245 000 | Z73133

- shape: T8
- luminous flux: 2 500 lm
- color temperature: 6 500 K
- power: 24.3 W
- luminous efficacy: 103 lm/W
- energy efficiency class: F
- beam angle: 260°
- color rendering index (CRI): Ra >80
- voltage: 230 V~/50 Hz
- dimensions: 1 500 × 26 × 26 mm
- packaging: 25 pc, small box



G13 | 2 500 lm | 24.3 W | 20 000 h | COOL WHITE | A–G F

8 592920 115466

Z73134 | 25/-/-/25
15 35 246 000 | Z73134

Luminaires

Highbays

PROFI PLUS

ASTER

PROFI PLUS

- for professional industrial installations at high heights
- Osram branded LED chips with a luminous efficacy of 180 lm/W
- IP65 rating ensures water resistance
- outstanding performance and light quality – CRI > 80
- option for dimming using accessories
- 5 years warranty
- use: industrial and warehouse buildings, large halls

- power: 100 W
- luminous flux: 18 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 60°
- dimensions: 265 × 163 mm in diameter
- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





100 W | 18 000 lm | IP65 | IK08 | 60° | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 124413

ZU310.6 | 1/-/-/1
15 46 139 000 | ZU310.6

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- power: 100 W
- luminous flux: 18 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 90°
- dimensions: 265 × 163 mm in diameter
- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





100 W | 18 000 lm | IP65 | IK08 | 90° | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 124406

ZU310.9 | 1/-/-/1

15 46 139 100 | ZU310.9

- power: 100 W
- luminous flux: 18 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 265 × 163 mm in diameter
- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





100 W | 18 000 lm | IP65 | IK08 | 120° | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 124390

ZU310.12 | 1/-/-/1

15 46 139 200 | ZU310.12

- power: 150 W
- luminous flux: 27 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 60°
- dimensions: 300 × 173 mm in diameter
- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





150 W | 27 000 lm | IP65 | IK08 | 60° | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 124444

ZU315.6 | 1/-/-/1

15 46 139 300 | ZU315.6

- power: 150 W
- luminous flux: 27 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 90°
- dimensions: 300 × 173 mm in diameter
- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





150 W | 27 000 lm | IP65 | IK08 | 90° | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 124437

ZU315.9 | 1/-/-/1

15 46 139 400 | ZU315.9

- power: 150 W
- luminous flux: 27 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 300 × 173 mm in diameter
- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





150 W | 27 000 lm | IP65 | IK08 | 120° | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 124420

ZU315.12 | 1/-/-/1

15 46 139 500 | ZU315.12

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- power: 200 W
- luminous flux: 36 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 60°
- dimensions: 340 × 178 mm in diameter
- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





200 W | 36 000 lm | IP65 | IK08 | 60° | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 124451

ZU320.6 | 1/-/-/1

15 46 139 600 | ZU320.6

- power: 200 W
- luminous flux: 36 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 90°
- dimensions: 340 × 178 mm in diameter
- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





200 W | 36 000 lm | IP65 | IK08 | 90° | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 124468

ZU320.9 | 1/-/-/1

15 46 139 700 | ZU320.9

- power: 200 W
- luminous flux: 36 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 340 × 178 mm in diameter
- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





200 W | 36 000 lm | IP65 | IK08 | 120° | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 124475

ZU320.12 | 1/-/-/1

15 46 139 800 | ZU320.12

Luminaires

Highbays

PROFI

CORUS

PROFI

- for industrial installations at high heights
- IP65 rating ensures water resistance
- outstanding performance and light quality – CRI > 80
- 5 years warranty
- use: industrial and warehouse buildings, large halls

- power: 83 W
- luminous flux: 10 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V
- IP rating: IP65
- beam angle: 110°
- dimensions: diameter 220 × 50 mm

- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK06
- packaging: 1 pc, box





83 W | 10 000 lm | IP65 | IK06 | 110° | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 122167

ZU083 | 1/-/-/3

15 46 138 000 | ZU083

- power: 133 W
- luminous flux: 16 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V
- IP rating: IP65
- beam angle: 110°
- dimensions: diameter 260 × 53 mm

- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK06
- packaging: 1 pc, box





133 W | 16 000 lm | IP65 | IK06 | 110° | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 122181

ZU133 | 1/-/-/3

15 46 138 100 | ZU133

- power: 166 W
- luminous flux: 20 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V
- IP rating: IP65
- beam angle: 110°
- dimensions: diameter 300 × 54 mm

- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK06
- packaging: 1 pc, box





166 W | 20 000 lm | IP65 | IK06 | 110° | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 122204

ZU166 | 1/-/-/3

15 46 138 200 | ZU166

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- power: 225 W
- luminous flux: 27 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V
- IP rating: IP65
- beam angle: 110°
- dimensions: diameter 340 × 54 mm
- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK06
- packaging: 1 pc, box





225 W | 27 000 lm | IP65 | IK06 | 110° | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 122228

ZU225 | 1/-/-/3

15 46 138 300 | ZU225

Luminaires

Highbays

Accesories

ZU9001 | 1/-/-/144

15 46 009 001 | ZU9001

8 592920 096628

5 YEARS WARRANTY | Dimmable 0–10 V



product: 0–10 V converter for Highbay ▪ dimensions: 55 × 29 mm in diameter ▪ material: plastic (PC) + metal ▪ designed for: Highbay line ASTER ▪ packaging: 1 ks, box

ZU9002 | 1/-/-/144

15 46 009 002 | ZU9002

8 592920 096642

5 YEARS WARRANTY | DALI COMPATIBLE



product: DALI converter for Highbay ▪ dimensions: 55 × 29 mm in diameter ▪ material: plastic (PC) + metal ▪ designed for: Highbay line ASTER ▪ packaging: 1 ks, box

ZU9902 | 1/-/-/20

15 46 009 902 | ZU9902

8 592920 109618



product: bracket for Highbay ▪ dimensions: 254 × 115 × 50 mm ▪ material: aluminum ▪ designed for: Highbay line ASTER ▪ color: black ▪ packaging: 1 pc, packet

ZU9003 | 1/-/-/96

15 46 009 003 | ZU9003

8 592920 121405

5 YEARS WARRANTY | PIR Sensor



product: PIR sensor for highbay ASTER ▪ dimensions: diemeter 55 × 40 mm ▪ material: plastic (PC) + metal ▪ designed for: Highbay line ASTER ▪ color: white ▪ packaging: 1 ks, box

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

ZU9004 | 1/-/-/144

15 46 009 004 | ZU9004

8 592920 121429

5 YEARS WARRANTY

MW Sensor



product: MW sensor for highbay ASTER ▪ dimensions: 55 × 29 mm in diameter ▪ material: plastic (PC) + metal ▪ designed for: Highbay line ASTER ▪ color: white ▪ packaging: 1 ks, box

ZU9005 | 1/-/-/81

15 46 009 005 | ZU9005

8 592920 121443

5 YEARS WARRANTY



product: sensor settings controler for Highbay ASTER ▪ dimensions: 125 × 70 × 25 mm ▪ material: plastic ▪ designed for: Highbay line ASTER ▪ color: white ▪ packaging: 1 ks, box

Luminaires

Dustproofs

PROFI PLUS

MISTY

PROFI PLUS

- designed for professional industrial installations
- replace older fluorescent luminaires
- modern design with high luminous efficacy up to 145 lm/W
- long life and instant 100% output
- energy saving up to 50% compared to fluorescent luminaires
- IP66 protection guarantees water resistance
- 5 years warranty
- use: industrial buildings, garages, corridors, workshops

- dimensions: 1 220 × 85 × 80 mm
- power: 21–26–31–35 W
- luminous flux: 3 300–5 600 lm
- color temperature: 4 000 K
- color rendering index (CRI): Ra >80
- beam angle: 120°
- IP rating: IP66
- through-wiring
- working temperature range: -20 °C to +40 °C

- clip material: stainless steel
- voltage: 220–240 V
- protection class: I
- packaging: 1 pc, box



35 W | 5 600 lm | IP66

4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 122808

ZT1521 | 1/-/-/9

15 46 138 400 | ZT1521

- dimensions: 1 220 × 85 × 80 mm
- power: 24–29–34–38 W
- luminous flux: 3 300–5 600 lm
- color temperature: 4 000–6 500 K
- color rendering index (CRI): Ra >80
- beam angle: 120°
- IP rating: IP66
- through-wiring
- working temperature range: -20 °C to +40 °C

- clip material: stainless steel
- voltage: 220–240 V
- protection class: I
- lumen output in emergency mode: 700 lm
- backup time: 3 hours
- battery warranty: 2 years
- packaging: 1 pc, box



38 W | 5 600 lm | IP66 | CCT switch

4 000 K NEUTRAL WHITE | 6 500 K COOL WHITE | 5 YEARS WARRANTY

8 592920 126165

ZT1521E | 1/-/-/9

15 46 138 401 | ZT1521E

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- dimensions: 1 220 × 85 × 80 mm
- power: 21–26–31–35 W
- luminous flux: 3 300–5 600 lm
- color temperature: 6 500 K
- color rendering index (CRI): Ra >80
- beam angle: 120°
- IP rating: IP66
- through-wiring
- working temperature range: -20 °C to +40 °C

- clip material: stainless steel
- voltage: 220–240 V
- protection class: I
- packaging: 1 pc, box



35 W | 5 600 lm | IP66

6 500 K COOL WHITE | 5 YEARS WARRANTY

8 592920 122822

ZT1531 | 1/-/-/9

15 46 138 500 | ZT1531

- dimensions: 1 520 × 85 × 80 mm
- power: 29–37–45–51 W
- luminous flux: 4 600–8 150 lm
- color temperature: 4 000 K
- color rendering index (CRI): Ra >80
- beam angle: 120°
- IP rating: IP66
- through-wiring
- working temperature range: -20 °C to +40 °C

- clip material: stainless steel
- voltage: 220–240 V
- protection class: I
- packaging: 1 pc, box



51 W | 8 150 lm | IP66

4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 122846

ZT1621 | 1/-/-/9

15 46 138 600 | ZT1621

- dimensions: 1 520 × 85 × 80 mm
- power: 32–40–48–54 W
- luminous flux: 4 600–8 150 lm
- color temperature: 4 000–6 500 K
- color rendering index (CRI): Ra >80
- beam angle: 120°
- IP rating: IP66
- through-wiring
- working temperature range: -20 °C to +40 °C

- clip material: stainless steel
- voltage: 220–240 V
- protection class: I
- lumen output in emergency mode: 700 lm
- backup time: 3 hours
- battery warranty: 2 years
- packaging: 1 pc, box



54 W | 8 150 lm | IP66 | CCT switch

4 000 K NEUTRAL WHITE | 6 500 K COOL WHITE | 5 YEARS WARRANTY

8 592920 126189

ZT1621E | 1/-/-/9

15 46 138 601 | ZT1621E

- dimensions: 1 520 × 85 × 80 mm
- power: 29–37–45–51 W
- luminous flux: 4 600–8 150 lm
- color temperature: 6 500 K
- color rendering index (CRI): Ra >80
- beam angle: 120°
- IP rating: IP66
- through-wiring
- working temperature range: -20 °C to +40 °C

- clip material: stainless steel
- voltage: 220–240 V
- protection class: I
- packaging: 1 pc, box



51 W | 8 150 lm | IP66

6 500 K COOL WHITE | 5 YEARS WARRANTY

8 592920 122860

ZT1631 | 1/-/-/9

15 46 138 700 | ZT1631

- dimensions: 670 × 85 × 80 mm
- power: 10–13–16–18 W
- luminous flux: 1 500–2 700 lm
- color temperature: 4 000–6 500 K
- color rendering index (CRI): Ra >80
- beam angle: 120°
- IP rating: IP66
- through-wiring
- working temperature range: -20 °C to +40 °C

- clip material: stainless steel
- voltage: 220–240 V
- protection class: I
- packaging: 1 pc, box



18 W | 1 500–2 700 lm | IP66 | 18 W

6 500 K COOL WHITE | 5 YEARS WARRANTY

8 592920 122884

ZT1040 | 1/-/-/12

15 46 138 800 | ZT1040

Luminaires

Dustproofs

PROFI

FESTY

PROFI

- designed for professional industrial installations
- replace older fluorescent luminaires
- characterised by their modern design
- excellent price/quality ratio
- long life and instant 100% output
- energy saving up to 50% compared to fluorescent luminaires
- 5 years warranty
- use: industrial buildings, garages, corridors, workshops

- dimensions: 670 × 64 × 64 mm
- power: 18 W
- luminous flux: 2 200 lm
- color temperature: 4 000 K
- color rendering index (CRI): Ra >80
- beam angle: 120°
- IP rating: IP65
- through-wiring
- working temperature range: -20 °C to +40 °C

- material: plastic (PC)
- clip material: no clips
- voltage: 220–240 V
- protection class: I
- packaging: 1 pc, box





18 W | 2 200 lm | IP65 | IK08

4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 118320

ZT4320 | 1/-/-/10

15 46 137 700 | ZT4320

- dimensions: 1 270 × 64 × 64 mm
- power: 34 W
- luminous flux: 4 100 lm
- color temperature: 4 000 K
- color rendering index (CRI): Ra >80
- beam angle: 120°
- IP rating: IP65
- through-wiring
- working temperature range: -20 °C to +40 °C

- material: plastic (PC)
- clip material: no clips
- voltage: 220–240 V
- protection class: I
- packaging: 1 pc, box





34 W | 4 100 lm | IP65 | IK08

4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 118344

ZT4420 | 1/-/-/10

15 46 137 800 | ZT4420

- dimensions: 1 570 × 64 × 64 mm
- power: 51 W
- luminous flux: 6 000 lm
- color temperature: 4 000 K
- color rendering index (CRI): Ra >80
- beam angle: 120°
- IP rating: IP65
- through-wiring
- working temperature range: -20 °C to +40 °C

- material: plastic (PC)
- clip material: no clips
- voltage: 220–240 V
- protection class: I
- packaging: 1 pc, box





51 W | 6 000 lm | IP65 | IK08

4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 118368

ZT4520 | 1/-/-/10

15 46 137 900 | ZT4520

Luminaires

Dustproofs

ESSENTIAL

DUSTY

ESSENTIAL

- designed for standard industrial installations
- replace older fluorescent luminaires
- long life and instant 100% output
- energy saving up to 50% compared to fluorescent luminaires
- IP65 protection guarantees water resistance
- possibility of through wiring
- 3 years warranty
- use: industrial buildings, garages, corridors, workshops

- dimensions: 754 × 53 × 35 mm
- power: 18 W
- luminous flux: 1 700 lm
- color temperature: 4 000 K
- color rendering index (CRI): Ra >80
- beam angle: 120°
- IP rating: IP65
- through-wiring
- working temperature range: -15 °C to +35 °C

- material: plastic (PC)
- clip material: no clips
- voltage: 220–240 V
- protection class: II
- packaging: 1 pc, blister



18 W | 1 700 lm | IP65 | IK08 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 085448

ZT3020 | 1/-/-/20
15 46 135 700 | ZT3020

- dimensions: 1 284 × 53 × 35 mm
- power: 37 W
- luminous flux: 3 800 lm
- color temperature: 4 000 K
- color rendering index (CRI): Ra >80
- beam angle: 120°
- IP rating: IP65
- through-wiring
- working temperature range: -15 °C to +35 °C

- material: plastic (PC)
- clip material: no clips
- voltage: 220–240 V
- protection class: II
- packaging: 1 pc, blister




37 W | 3 800 lm | IP65 | IK08 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 085455

ZT3120 | 1/-/-/20
15 46 135 800 | ZT3120

- dimensions: 1 564 × 53 × 35 mm
- power: 45 W
- luminous flux: 4 500 lm
- color temperature: 4 000 K
- color rendering index (CRI): Ra >80
- beam angle: 120°
- IP rating: IP65
- through-wiring
- working temperature range: -20 °C to +35 °C

- material: plastic (PC)
- clip material: no clips
- voltage: 220–240 V
- protection class: II
- packaging: 1 pc, blister

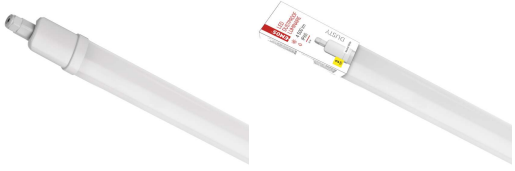

45 W | 4 500 lm | IP65 | IK08 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 085462

ZT3220 | 1/-/-/20
15 46 135 900 | ZT3220

Luminaires

Street Lights

PROFI

SOLIS

PROFI

- street lights
- durable aluminium body
- lighting efficiency up to 120 lm/W
- high operating cost savings compared to sodium lamps
- 3 years warranty
- use: permanent outdoor lighting

- power: 30 W
- luminous flux: 3 600 lm
- color temperature: 3 000 K
- light color: warm white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V
- IP rating: IP65
- beam angle: 130 × 60°
- dimensions: 412 × 146 × 63 mm

- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





30 W | 3 600 lm | IP65 | IK08

3 000 K WARM WHITE | 3 YEARS WARRANTY

8 592920 124055

Z00303 | 1/-/-/4

15 36 000 000 | Z00303

- power: 30 W
- luminous flux: 3 600 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V
- IP rating: IP65
- beam angle: 130 × 60°
- dimensions: 412 × 146 × 63 mm

- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





30 W | 3 600 lm | IP65 | IK08

4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 124079

Z00304 | 1/-/-/4

15 36 020 000 | Z00304

- power: 50 W
- luminous flux: 6 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V
- IP rating: IP65
- beam angle: 130 × 60°
- dimensions: 412 × 146 × 63 mm

- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





50 W | 6 000 lm | IP65 | IK08

4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 124093

Z00504 | 1/-/-/4

15 36 020 001 | Z00504

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- power: 70 W
- luminous flux: 8 400 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V
- IP rating: IP65
- beam angle: 130 × 60°
- dimensions: 515 × 175 × 63 mm

- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





70 W | 8 400 lm | IP65 | IK08

4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 124116

Z00704 | 1/-/-/2

15 36 020 002 | Z00704

Luminaires

Floodlights

PROFI PLUS

AVENO

PROFI PLUS

- combine top performance with a modern look
- provide a luminous efficiency of up to 160 lm/W
- the robust and well-made aluminium body
- adjustable wattage on selected models
- cost savings of up to 90% compared to halogen floodlights
- continuously dimmable
- 5 years warranty
- use: permanent illumination of indoor and outdoor areas

- power: 20 W
- luminous flux: 2 900 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V
- IP rating: IP66
- beam angle: 100°
- dimensions: 175 × 165 × 34 mm

- supply cable length: 1 m
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





20 W | 2 900 lm | IP66 | IK08

4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 130728

ZS2413 | 1/-/-/10

15 31 241 300 | ZS2413

- power: 30 W
- luminous flux: 4 500 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V
- IP rating: IP66
- beam angle: 100°
- dimensions: 196 × 183 × 37 mm

- supply cable length: 1 m
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





30 W | 4 500 lm | IP66 | IK08

4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 130742

ZS2423 | 1/-/-/10

15 31 242 300 | ZS2423

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- power: 48 W
- luminous flux: 7 200 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V
- IP rating: IP66
- beam angle: 100°
- dimensions: 247 × 183 × 37 mm

- supply cable length: 1 m
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





48 W | 7 200 lm | IP66 | IK08 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 130766

ZS2433 | 1/-/-/10
15 31 243 300 | ZS2433

- power: 100 W
- luminous flux: 16 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 100–277 V
- IP rating: IP66
- beam angle: 90°
- dimensions: 294 × 270 × 70 mm

- supply cable length: 1 m
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





100 W | 16 000 lm | IP66 | IK08 | Dimmable | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 129388

ZS2443 | 1/-/-/1
15 31 244 300 | ZS2443

- power: 100 W
- luminous flux: 15 500 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 100–277 V
- IP rating: IP66
- beam angle: 60° × 135°
- dimensions: 294 × 270 × 70 mm

- supply cable length: 1 m
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





100 W | 15 500 lm | IP66 | IK08 | Dimmable | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 129456

ZS2443A | 1/-/-/1
15 31 244 310 | ZS2443A

- power: 150 W
- luminous flux: 24 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 100–277 V
- IP rating: IP66
- beam angle: 90°
- dimensions: 294 × 345 × 70 mm

- supply cable length: 1 m
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





150 W | 24 000 lm | IP66 | IK08 | Dimmable | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 129395

ZS2453 | 1/-/-/1
15 31 245 300 | ZS2453

- power: 150 W
- luminous flux: 23 250 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 100–277 V
- IP rating: IP66
- beam angle: 60° × 135°
- dimensions: 294 × 345 × 70 mm

- supply cable length: 1 m
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





150 W | 23 250 lm | IP66 | IK08 | Dimmable | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 129449

ZS2453A | 1/-/-/1
15 31 245 310 | ZS2453A

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- power: 200 W
- luminous flux: 32 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 100–277 V
- IP rating: IP66
- beam angle: 90°
- dimensions: 368 × 388 × 75 mm
- supply cable length: 1 m
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





200 W | 32 000 lm | IP66 | IK08 | Dimmable | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 129401

ZS2463 | 1/-/-/1

15 31 246 300 | ZS2463

- power: 200 W
- luminous flux: 31 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 100–277 V
- IP rating: IP66
- beam angle: 60° × 135°
- dimensions: 368 × 388 × 70 mm
- supply cable length: 1 m
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





200 W | 31 000 lm | IP66 | IK08 | Dimmable | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 129432

ZS2463A | 1/-/-/1

15 31 246 310 | ZS2463A

- power: 300 W
- luminous flux: 48 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 100–277 V
- IP rating: IP66
- beam angle: 90°
- dimensions: 432 × 425 × 75 mm
- supply cable length: 1 m
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





300 W | 48 000 lm | IP66 | IK08 | Dimmable | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 129418

ZS2473 | 1/-/-/1

15 31 247 300 | ZS2473

Luminaires

Floodlights

PROFI

INOVO

PROFI

- cost savings of up to 95% compared to halogen spotlights
- professional workmanship for the most demanding conditions
- easy cable connection using the cable connector (included)
- motion sensor with dimming and run time adjustment
- 5 years warranty
- use: permanent illumination of indoor and outdoor areas

- power: 10 W
- luminous flux: 1 100 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 95 × 70 × 27 mm

- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK07
- packaging: 1 pc, box





1 100 lm | 10 W | IP65 | IK07

4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | Quick connector

8 592920 105665

ZS2612 | 1/-/-/30

15 31 242 612 | ZS2612

- power: 20 W
- luminous flux: 2 200 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 135 × 95 × 28 mm

- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK07
- packaging: 1 pc, box





2 200 lm | 20 W | IP65 | IK07

4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | Quick connector

8 592920 105689

ZS2622 | 1/-/-/20

15 31 242 622 | ZS2622

- power: 30 W
- luminous flux: 3 300 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 160 × 110 × 28 mm

- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK07
- packaging: 1 pc, box





3 300 lm | 30 W | IP65 | IK07

4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | Quick connector

8 592920 105702

ZS2632 | 1/-/-/10

15 31 242 632 | ZS2632

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- power: 50 W
- luminous flux: 5 500 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 200 × 145 × 28 mm

- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK07
- packaging: 1 pc, box





5 500 lm | 50 W | IP65 | IK07

4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | Quick connector

8 592920 105726

ZS2642 | 1/-/-/10

15 31 242 642 | ZS2642

- power: 100 W
- luminous flux: 11 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 300 × 220 × 42 mm

- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





11 000 lm | 100 W | IP65 | IK08

4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | Quick connector

8 592920 105740

ZS2652 | 1/-/-/5

15 31 242 652 | ZS2652

- power: 150 W
- luminous flux: 16 500 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 335 × 270 × 43 mm

- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





16 500 lm | 150 W | IP65 | IK08

4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | Quick connector

8 592920 105764

ZS2662 | 1/-/-/3

15 31 242 662 | ZS2662

- power: 200 W
- luminous flux: 22 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 390 × 300 × 49 mm

- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





22 000 lm | 200 W | IP65 | IK08

4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | Quick connector

8 592920 105788

ZS2672 | 1/-/-/2

15 31 242 672 | ZS2672

- power: 10 W
- luminous flux: 1 100 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 95 × 70 × 27 mm

- supply cable length: 30 cm
- detection range of PIR Sensor: 10 m
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK06
- packaging: 1 pc, box





1 100 lm | 10 W | IP65 | IK06

4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | Quick connector

8 592920 105801

ZS2712 | 1/-/-/20

15 31 242 712 | ZS2712

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- power: 20 W
- luminous flux: 2 200 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 135 × 95 × 28 mm

- supply cable length: 30 cm
- detection range of PIR Sensor: 10 m
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK06
- packaging: 1 pc, box





2 200 lm | 20 W | IP65 | IK06

4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | Quick connector

8 592920 105825

ZS2722 | 1/-/-/20

15 31 242 722 | ZS2722

- power: 30 W
- luminous flux: 3 300 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 160 × 110 × 28 mm

- supply cable length: 30 cm
- detection range of PIR Sensor: 10 m
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK06
- packaging: 1 pc, box





3 300 lm | 30 W | IP65 | IK06

4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | Quick connector

8 592920 105832

ZS2732 | 1/-/-/10

15 31 242 732 | ZS2732

- power: 50 W
- luminous flux: 5 500 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 200 × 145 × 28 mm

- supply cable length: 30 cm
- detection range of PIR Sensor: 10 m
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK06
- packaging: 1 pc, box





5 500 lm | 50 W | IP65 | IK06

4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | Quick connector

8 592920 105849

ZS2742 | 1/-/-/10

15 31 242 742 | ZS2742

Luminaires

Floodlights

CLASSIC

ILIO

CLASSIC

- unique design with a milky PC diffuser
- cost savings of up to 90% compared to halogen spotlights
- IP65 protection guarantees water resistance
- easy cable connection to the terminal block
- bevelled bracket allows easy installation on the wall
- 3 years warranty
- use: facades, private and public spaces, sales stands

- power: 10,5 W
- luminous flux: 950 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 114 × 99 × 51 mm

- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





950 lm | 10.5 W | IP65 | IK08 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | TERMINAL BLOCK INSIDE

8 592920 081495

ZS2510 | 1/-/-/20

15 31 252 510 | ZS2510

- power: 21 W
- luminous flux: 1 900 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 147 × 123 × 55 mm

- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





1 900 lm | 21 W | IP65 | IK08 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | TERMINAL BLOCK INSIDE

8 592920 081518

ZS2520 | 1/-/-/20

15 31 252 520 | ZS2520

- power: 31 W
- luminous flux: 2 800 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 178 × 148 × 55 mm

- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





2 800 lm | 31 W | IP65 | IK08 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | TERMINAL BLOCK INSIDE

8 592920 081532

ZS2530 | 1/-/-/12

15 31 252 530 | ZS2530

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- power: 51 W
- luminous flux: 4 600 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 208 ×170 × 55 mm

- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





4 600 lm | 51 W | IP65 | IK08 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | TERMINAL BLOCK INSIDE

8 592920 081556

ZS2540 1/-/-/10

15 31 252 540 ZS2540

- power: 10,5 W
- luminous flux: 950 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP44
- beam angle: 120°
- dimensions: 114 × 162 × 75 mm

- detection range of PIR Sensor: 10 m
- body material: aluminum
- mechanical impact protection: IK06
- packaging: 1 pc, box





950 lm | 10.5 W | IP44 | IK06 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | TERMINAL BLOCK INSIDE

8 592920 081570

ZS2910 1/-/-/18

15 31 252 910 ZS2910

- power: 21 W
- luminous flux: 1 900 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP44
- beam angle: 120°
- dimensions: 147 × 175 × 75 mm

- detection range of PIR Sensor: 10 m
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK06
- packaging: 1 pc, box





1 900 lm | 21 W | IP44 | IK06 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | TERMINAL BLOCK INSIDE

8 592920 081792

ZS2920 1/-/-/12

15 31 252 920 ZS2920

- power: 31 W
- luminous flux: 2 800 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP44
- beam angle: 120°
- dimensions: 178 × 201 × 75 mm

- detection range of PIR Sensor: 10 m
- body material: aluminum
- mechanical impact protection: IK06
- packaging: 1 pc, box





2 800 lm | 31 W | IP44 | IK06 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | TERMINAL BLOCK INSIDE

8 592920 081594

ZS2930 1/-/-/10

15 31 252 930 ZS2930

- power: 51 W
- luminous flux: 4 600 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP44
- beam angle: 120°
- dimensions: 208 × 223 × 75 mm

- detection range of PIR Sensor: 10 m
- body material: aluminum
- mechanical impact protection: IK06
- packaging: 1 pc, box





4 600 lm | 50 W | IP44 | IK06 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | TERMINAL BLOCK INSIDE

8 592920 081617

ZS2940 1/-/-/5

15 31 252 940 ZS2940

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

TAMBO

CLASSIC

- aluminium with a milky PC diffuser for a pleasantly light
- cost savings of up to 90% compared to halogen spotlights
- IP65 protection guarantees water resistance
- ultra-thin design
- bevelled bracket allows easy installation on the wall
- 3 years warranty
- use: commercial, private buildings and ambient environment

- power: 10,5 W
- luminous flux: 800 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 105 × 102 × 55 mm

- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





800 lm | 10.5 W | IP65 | IK08

4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | RUBBER WIRE

8 592920 081631

ZS2511 | 1/-/-/14

15 31 242 511 | ZS2511

- power: 20 W
- luminous flux: 1 600 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 135 × 101 × 55 mm

- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





1 600 lm | 20 W | IP65 | IK08

4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | RUBBER WIRE

8 592920 081655

ZS2521 | 1/-/-/12

15 31 242 521 | ZS2521

- power: 30.5 W
- luminous flux: 2 600 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 165 × 114 × 55 mm

- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





2 600 lm | 30.5 W | IP65 | IK08

4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | RUBBER WIRE

8 592920 081679

ZS2531 | 1/-/-/10

15 31 242 531 | ZS2531

- power: 51 W
- luminous flux: 4 300 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 210 × 142 × 55 mm

- supply cable length: 30 cm
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





4 300 lm | 51 W | IP65 | IK08

4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | RUBBER WIRE

8 592920 081693

ZS2541 | 1/-/-/7

15 31 242 541 | ZS2541

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- power: 10,5 W
- luminous flux: 800 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP54
- beam angle: 120°
- dimensions: 105 × 143 × 64 mm

- supply cable length: 30 cm
- detection range of PIR Sensor: 10 m
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK06
- packaging: 1 pc, box





800 lm | 10.5 W | IP54 | IK06

4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | RUBBER WIRE

8 592920 081716

ZS2911 | 1/-/-/14

15 31 242 911 | ZS2911

- power: 20 W
- luminous flux: 1 600 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP54
- beam angle: 120°
- dimensions: 135 × 165 × 64 mm

- supply cable length: 30 cm
- detection range of PIR Sensor: 10 m
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK06
- packaging: 1 pc, box





1 600 lm | 20 W | IP54 | IK06

4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | RUBBER WIRE

8 592920 081730

ZS2921 | 1/-/-/12

15 31 242 921 | ZS2921

- power: 30.5 W
- luminous flux: 2 600 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP54
- beam angle: 120°
- dimensions: 165 × 185 × 64 mm

- supply cable length: 30 cm
- detection range of PIR Sensor: 10 m
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK06
- packaging: 1 pc, box





2 600 lm | 30.5 W | IP54 | IK06

4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | RUBBER WIRE

8 592920 081754

ZS2931 | 1/-/-/10

15 31 242 931 | ZS2931

- power: 51 W
- luminous flux: 4 300 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP54
- beam angle: 120°
- dimensions: 210 × 217 × 64 mm

- supply cable length: 30 cm
- detection range of PIR Sensor: 10 m
- lead-in cable material: rubber
- body material: aluminum
- mechanical impact protection: IK06
- packaging: 1 pc, box





4 300 lm | 51 W | IP54 | IK06

4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | RUBBER WIRE

8 592920 081778

ZS2941 | 1/-/-/7

15 31 242 941 | ZS2941

Luminaires

Floodlights

ESSENTIAL

SIMPO

ESSENTIAL

- motion sensor allows to set the daylight sensor and duration
- cost savings of up to 90% compared to halogen spotlights
- IP44 protection ensures water resistance
- ultra-thin design
- bevelled bracket allows easy installation on the wall
- 3 years warranty
- use: private objects and surrounding environment

- power: 10 W
- luminous flux: 1 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 85 × 73 × 25 mm

- supply cable length: 20 cm
- lead-in cable material: rubber
- lead-in cable type: H05RN-F
- body material: aluminum
- packaging: 1 pc, box





10 W | 1 000 lm | IP65

4 000 K
NEUTRAL WHITE

8 592920 120286

ZS2213 | 1/-/-/48

15 31 221 300 | ZS2213

- power: 20 W
- luminous flux: 2 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 114 × 92 × 25 mm

- supply cable length: 20 cm
- lead-in cable material: rubber
- lead-in cable type: H05RN-F
- body material: aluminum
- packaging: 1 pc, box





20 W | 2 000 lm | IP65

4 000 K
NEUTRAL WHITE

8 592920 120309

ZS2223 | 1/-/-/24

15 31 222 300 | ZS2223

- power: 30 W
- luminous flux: 3 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 143 × 113 ×25 mm

- supply cable length: 20 cm
- lead-in cable material: rubber
- lead-in cable type: H05RN-F
- body material: aluminum
- packaging: 1 pc, box





30 W | 3 000 lm | IP65

4 000 K
NEUTRAL WHITE

8 592920 120323

ZS2233 | 1/-/-/24

15 31 223 300 | ZS2233

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- power: 50 W
- luminous flux: 5 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 182 × 142 × 27 mm

- supply cable length: 20 cm
- lead-in cable material: rubber
- lead-in cable type: H05RN-F
- body material: aluminum
- packaging: 1 pc, box





50 W | 5 000 lm | IP65

4 000 K
NEUTRAL WHITE

8 592920 120347

ZS2243
15 31 224 300

1/-/-/12
ZS2243

- power: 10 W
- luminous flux: 1 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP44
- beam angle: 120°
- dimensions: 85 × 141 × 52 mm

- supply cable length: 20 cm
- detection range of PIR Sensor: 8 m
- lead-in cable material: rubber
- lead-in cable type: H05RN-F
- body material: aluminum
- packaging: 1 pc, box





10 W | 1 000 lm | IP44

4 000 K
NEUTRAL WHITE

8 592920 120361

ZS2313
15 31 231 300

1/-/-/16
ZS2313

- power: 20 W
- luminous flux: 2 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP44
- beam angle: 120°
- dimensions: 114 × 156 × 52 mm

- supply cable length: 20 cm
- detection range of PIR Sensor: 8 m
- lead-in cable material: rubber
- lead-in cable type: H05RN-F
- body material: aluminum
- packaging: 1 pc, box





20 W | 2 000 lm | IP44

4 000 K
NEUTRAL WHITE

8 592920 120385

ZS2323
15 31 232 300

1/-/-/20
ZS2323

- power: 30 W
- luminous flux: 3 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP44
- beam angle: 120°
- dimensions: 143 × 175 × 52 mm

- supply cable length: 20 cm
- detection range of PIR Sensor: 8 m
- lead-in cable material: rubber
- lead-in cable type: H05RN-F
- body material: aluminum
- packaging: 1 pc, box





30 W | 3 000 lm | IP44

4 000 K
NEUTRAL WHITE

8 592920 120408

ZS2333
15 31 233 300

1/-/-/10
ZS2333

- power: 50 W
- luminous flux: 5 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP44
- beam angle: 120°
- dimensions: 182 × 199 × 52 mm

- supply cable length: 20 cm
- detection range of PIR Sensor: 8 m
- lead-in cable material: rubber
- lead-in cable type: H05RN-F
- body material: aluminum
- packaging: 1 pc, box





50 W | 5 000 lm | IP44

4 000 K
NEUTRAL WHITE

8 592920 120422

ZS2343
15 31 234 300

1/-/-/10
ZS2343

Luminaires

Floodlights

Accessories

- water resistant connector for connection of 2 three-wire cables
- steel folding tripod as a stand for 2 floodlights
- high enclosure rating of IP68, silicone sealing
- height: 66–180 cm, load capacity max. 4 kg

- voltage: 250 V
- IP rating: IP68
- dimensions: 26 × 70 mm in diameter
- body material: plastic (PA66)
- mechanical impact protection: IK08
- packaging: 1 pc, packet





IP68

8 592920 031919

ZS9010 1/-/10/90

15 31 900 010 ZS9010

- voltage: 250 V
- IP rating: IP68
- dimensions: 26 × 90 mm in diameter
- body material: plastic (PA66)
- mechanical impact protection: IK08
- packaging: 1 pc, packet





IP68

8 592920 087718

ZS9020 1/-/10/90

15 31 900 020 ZS9020

- voltage: 250 V
- IP rating: IP68
- dimensions: 26 × 90 × 62 mm
- body material: plastic (PA66)
- mechanical impact protection: IK08
- packaging: 1 pc, packet





IP68

8 592920 087749

ZS9030 1/-/10/80

15 31 900 030 ZS9030

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- dimensions: 140 × 120 × 630 mm
- body material: steel
- packaging: 1 pc, box





4 kg max.

8 592920 035160

ZS9510
15 31 950 010

1/-/-/4
ZS9510

Luminaires

Work Lights

PROFI

CANNO

PROFI

- mains powered and suitable for indoor and outdoor use
- robust construction which is shockproof and waterproof
- wide area illumination angle of 360°
- water and impact resistance due to IP54 and IK07 protection
- designed handle and folding design makes easy to transport
- 3 years warranty
- use: construction, house, garage, workshop, car repair shop

- power: 70 W
- luminous flux: 7 000 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP54
- beam angle: 360°
- dimensions: 205 × 160 × 880 mm

- supply cable length: 2 m
- number of adapter plugs: 1
- adapter plug type: SCHUKO
- lead-in cable material: rubber
- lead-in cable type: H07RN-F
- body material: plastic (ABS)
- mechanical impact protection: IK07
- packaging: 1 pc, box





70 W | 7 000 lm | IP54 | IK07 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 120545

ZS3360S
15 42 033 601

1/-/-/1
ZS3360S

Luminaires

Work Lights

CLASSIC

ILIO

CLASSIC

- mains powered, suitable for indoor and outdoor use
- robust shockproof and waterproof construction
- wide area illumination angle of 110°
- shockproof and waterproof thanks to IP44 and IK10 protection
- handle and folding design allowing easy reflector transport
- a 3-year warranty
- usage: constructions, houses, garages, workshops, etc.

- power: 21 W
- luminous flux: 1 900 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP44
- beam angle: 110°
- dimensions: 215 × 185 × 250 mm

- supply cable length: 1.5 m
- lead-in cable material: rubber
- lead-in cable type: H07RN-F
- body material: aluminum
- mechanical impact protection: IK10
- packaging: 1 pc, box





1 900 lm | 21 W | IP44 | IK10 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | 150 cm

8 592920 104835

ZS3322	1/-/-/6
15 42 033 220	ZS3322

- power: 31 W
- luminous flux: 2 800 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP44
- beam angle: 110°
- dimensions: 240 × 185 × 275 mm

- supply cable length: 1.5 m
- lead-in cable material: rubber
- lead-in cable type: H07RN-F
- body material: aluminum
- mechanical impact protection: IK10
- packaging: 1 pc, box





2 800 lm | 31 W | IP44 | IK10 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | 150 cm

8 592920 104859

ZS3332	1/-/-/4
15 42 033 320	ZS3332

- power: 51 W
- luminous flux: 4 600 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP44
- beam angle: 110°
- dimensions: 270 × 185 × 275 mm

- supply cable length: 1.5 m
- lead-in cable material: rubber
- lead-in cable type: H07RN-F
- body material: aluminum
- mechanical impact protection: IK10
- packaging: 1 pc, box





4 600 lm | 51 W | IP44 | IK10 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY | 150 cm

8 592920 104873

ZS3342	1/-/-/4
15 42 033 420	ZS3342

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

HOBBY SLIM

CLASSIC

- higher coverage for indoor and outdoor lighting
- steel folding tripod
- resistant to low outdoor temperatures or water droplets
- adjustable direction of light wherever needed
- adjustable up to 66-185 cm height
- IP65 protection guarantees water resistance
- usage: constructions, houses, garages, workshops, etc.

- power: 2× 20,5 W
- luminous flux: 2× 1 600 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 860 × 860 × 1 850 mm

- supply cable length: 3 m
- lead-in cable material: rubber
- lead-in cable type: H07RN-F
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





2× 1 600 lm | 2× 20.5 W | IP65 | IK08 | 4 000 K NEUTRAL WHITE | 3 m

8 592920 067543

ZS2221.2 | 1/-/-/2

15 31 222 120 | ZS2221.2

- power: 2× 30 W
- luminous flux: 2× 2 400 lm
- color temperature: 4 000 K
- light color: neutral white
- color rendering index (CRI): Ra > 80
- voltage: 220–240 V~
- IP rating: IP65
- beam angle: 120°
- dimensions: 860 × 860 × 1 850 mm

- supply cable length: 3 m
- lead-in cable material: rubber
- lead-in cable type: H07RN-F
- body material: aluminum
- mechanical impact protection: IK08
- packaging: 1 pc, box





2× 2 400 lm | 2× 30 W | IP65 | IK08 | 4 000 K NEUTRAL WHITE | 3 m

8 592920 067567

ZS2231.2 | 1/-/-/2

15 31 223 120 | ZS2231.2

ACCO

CLASSIC

- floodlights with accumulators offer maximum variability
- robust design suitable for working in hostile environments
- no need for a present power source
- folding stand for easy transport and storage
- IP54 coverage ensures water resistance
- 120° lighting angle
- a 3-year warranty
- usage: constructions, garages, workshops, camping, etc.

- power: 10 W
- luminous flux: 1 000 lm
- color temperature: 6 500 K
- light color: cool white
- color rendering index (CRI): Ra > 80
- voltage: 5 V DC 220–240 V AC
- IP rating: IP54
- beam angle: 120°
- dimensions: 212 × 177 × 224 mm

- battery: Li-Ion 4 400 mAh
- AKU lighting time: 3 – 10 hours
- body material: aluminum
- packaging: 1 pc, box





1 000 lm | 10 W | IP54 | IK05 | Li-Ion 4 400 mAh | 6 500 K COOL WHITE | 3 YEARS WARRANTY | 3 STEPS DIMMING

8 592920 108123

ZS2812 | 1/-/-/5

15 31 281 200 | ZS2812

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- power: 20 W
- luminous flux: 2 000 lm
- color temperature: 6 500 K
- light color: cool white
- color rendering index (CRI): Ra > 80
- voltage: 5 V DC 220–240 V AC
- IP rating: IP54
- beam angle: 120°
- dimensions: 266 × 220 × 273 mm
- battery: Li-Ion 6 600 mAh
- AKU lighting time: 3 – 10 hours
- body material: aluminum
- packaging: 1 pc, box





2 000 lm | 20 W | IP54 | IK05 | Li-Ion 6 600 mAh | 6 500 K COOL WHITE | 3 YEARS WARRANTY | 3 STEPS DIMMING

8 592920 108147

ZS2822 | 1/-/-/4

15 31 282 200 | ZS2822

- power: 30 W
- luminous flux: 3 000 lm
- color temperature: 6 500 K
- light color: cool white
- color rendering index (CRI): Ra > 80
- voltage: 5 V DC 220–240 V AC
- IP rating: IP54
- beam angle: 120°
- dimensions: 292 × 219 × 273 mm
- battery: Li-Ion 10 000 mAh
- AKU lighting time: 3 – 10 hours
- body material: aluminum
- packaging: 1 pc, box





3 000 lm | 30 W | IP54 | IK05 | Li-Ion 10 000 mAh | 6 500 K COOL WHITE | 3 YEARS WARRANTY | 3 STEPS DIMMING

8 592920 108161

ZS2832 | 1/-/-/2

15 31 283 200 | ZS2832

Luminaires

Linear Luminaires

PROFI PLUS

ORTO

PROFI PLUS

- modern luminaires are made of high-quality aluminium profile
- they can be combined into different shapes
- ready for continuous installation in linear wiring
- possibility of mounted, built-in or hanging installation
- 5 years warranty
- use: office lighting, sales areas, interior spaces

- power: 8 W
- luminous flux: 800 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: surface/recessed
- dimensions: 151 × 151 × 58 mm
- body colour: white
- line: ORTO
- warranty period: 5 years
- UGR<: 22





800 lm | 8 W | IP20 | Dimmable | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 114438

ZALL | 1/-/-/12

15 43 081 000 | ZALL

EMOS
A brand of legrand


www.emos.eu

Order Code
Item Number

Packaging
Type

- power: 12 W
- luminous flux: 1 200 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: surface/recessed
- dimensions: 252 × 151 × 58 mm
- body colour: white

- line: ORTO
- warranty period: 5 years
- UGR<: 22





1 200 lm | 12 W | IP20 | Dimmable | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 114414

ZALT 1/-/-/8

15 43 121 000 ZALT

- power: 15 W
- luminous flux: 1 500 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: surface/recessed
- dimensions: 252 × 252 × 58 mm
- body colour: white

- line: ORTO
- warranty period: 5 years
- UGR<: 22





1 500 lm | 15 W | IP20 | Dimmable | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 114391


ZALX 1/-/-/6

15 43 151 000 ZALX

- power: 19 W
- luminous flux: 2 000 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: surface/recessed
- dimensions: 600 × 49 × 58 mm
- body colour: white

- line: ORTO
- warranty period: 5 years
- UGR<: 22





2 000 lm | 19 W | IP20 | Dimmable | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 114353

ZAL192 1/-/-/6

15 43 191 000 ZAL192

- power: 38 W
- luminous flux: 4 200 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: surface/recessed
- dimensions: 1 200 × 49 × 58 mm
- body colour: white

- line: ORTO
- warranty period: 5 years
- UGR<: 22





4 200 lm | 38 W | IP20 | Dimmable | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 114377

ZAL382 1/-/-/6

15 43 381 000 ZAL382

- product: set of ropes
- dimensions: 150 cm (cable length)
- designed for: linear luminaires
- packaging: 1 ks, box





8 592920 114452

ZALAP 1/-/-/100

15 43 999 000 ZALAP

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- product: set of hooks
- designed for: linear luminaires
- packaging: 1 ks, box





8 592920 114476

ZALAR 1/-/-/36

15 43 999 001 ZALAR

- product: power supply box
- material: metal
- designed for: linear luminaires





8 592920 115473

ZALAS 1/-/-/24

15 43 999 002 ZALAS

Luminaires

LED Panels

PROFI PLUS

PROXO

PROFI PLUS

- the square or rectangular series are an effective option
- high colour rendering index models
- high efficiency and energy saving
- resistance to yellowing due to UV radiation
- 5 years warranty
- use: offices, classrooms and indoor areas

- power: 40 W
- replacement of incandescent bulb: 4× 18 W CFL
- luminous flux: 3 700 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 95
- beam angle: 90°
- type of mounting: recessed
- dimensions: 595 × 595 × 10 mm
- body colour: white
- line: PROXO
- warranty period: 5 years
- UGR<: 19





3 700 lm | 40 W | IP20 | Dimmable | 90° | UGR < 19 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY | REAL COLORS CRI>95

8 592920 083291

ZR1433 1/-/-/5


15 44 104 032 ZR1433

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number	Packaging Type

- power: 19 W
- replacement of incandescent bulb: 2× 18 W CFL
- luminous flux: 1 800 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 595 × 295 × 10,4 mm
- body colour: white
- line: PROXO
- warranty period: 5 years
- UGR<: 22





1 800 lm | 19 W | IP20 | Dimmable | 120° | UGR < 22 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 034095

ZR2212 | 1/-/-/8
15 41 181 200 | ZR2212

- power: 33 W
- replacement of incandescent bulb: 4× 18 W CFL
- luminous flux: 4 360 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 595 × 595 × 10 mm
- body colour: white
- line: PROXO
- warranty period: 5 years
- UGR<: 22





4 360 lm | 33 W | IP20 | Dimmable | 120° | UGR < 22 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 131954

ZB1114 | 1/-/-/4
15 44 103 320 | ZB1114

- power: 33 W
- replacement of incandescent bulb: 4× 18 W CFL
- luminous flux: 4 100 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 90°
- type of mounting: recessed
- dimensions: 595 × 595 × 10 mm
- body colour: white
- line: PROXO
- warranty period: 5 years
- UGR<: 19





4 100 lm | 33 W | IP20 | Dimmable | 90° | UGR < 19 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 131978

ZB1124 | 1/-/-/4
15 44 103 321 | ZB1124

- power: 33 W
- replacement of incandescent bulb: 2× 36 W CFL
- luminous flux: 4 360 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 295 × 1 195 × 10 mm
- body colour: white
- line: PROXO
- warranty period: 5 years
- UGR<: 22






4 360 lm | 33 W | IP20 | Dimmable | 120° | UGR < 22 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 131992

ZB3114 | 1/-/-/4
15 44 203 320 | ZB3114

- power: 33 W
- replacement of incandescent bulb: 2× 36 W CFL
- luminous flux: 4 100 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 90°
- type of mounting: recessed
- dimensions: 295 × 1 195 × 10 mm
- body colour: white
- line: PROXO
- warranty period: 5 years
- UGR<: 19





4 100 lm | 33 W | IP20 | Dimmable | 90° | UGR < 19 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 132012

ZB3124 | 1/-/-/4
15 44 203 321 | ZB3124

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

PIXXO

PROFI PLUS

- square-shaped luminaire is for indoor lighting
- IP65 protection guarantees water resistance
- resistance of the light-conducting plate against yellowing due to U
- 5 years warranty
- use: offices, classrooms and indoor areas

- power: 48 W
- replacement of incandescent bulb: 4× 18 W CFL
- luminous flux: 4 800 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 595 × 595 × 10 mm

- body colour: white
- line: PROXO
- warranty period: 5 years
- UGR<: 22





4 800 lm | 48 W | IP65 | Dimmable | 120° | UGR < 22 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 067826

ZR1532 1/-/-/4

15 44 104 820 ZR1532

LEXXO

PROFI PLUS

- modern energy-saving luminaires use backlit technology
- more uniform light emission and higher luminous efficiency
- outstanding performance and lighting quality – CRI > 80
- pleasant diffused light with a beam angle of 90°/120°
- 5 years warranty
- use: offices, classrooms and indoor areas

- power: 34 W
- replacement of incandescent bulb: 4× 18 W CFL
- luminous flux: 4 200 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 595 × 595 × 30 mm

- body colour: white
- line: LEXXO
- warranty period: 5 years
- UGR<: 22





4 200 lm | 34 W | IP20/IP54 | Dimmable | 120° | UGR < 22 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 117170

ZR1642 1/-/-/4

15 44 103 428 ZR1642

- product: frame for surface installation
- dimensions: 600 × 600 × 70 mm
- material: aluminum
- designed for: Backlit panel 60 × 60
- color: white
- packaging: 1 ks, box





8 592920 106853

ZR9036 1/-/-/20

15 44 100 000 ZR9036

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- power: 30 W
- replacement of incandescent bulb: 4× 18 W CFL
- luminous flux: 4 000 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 595 × 595 × 25 mm
- body colour: white
- line: LEXXO
- warranty period: 5 years
- UGR<: 19






4 000 lm | 30 W | IP40/IP20 | Dimmable | 120° | UGR < 19 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 123300

ZB2124 | 1/-/-/4

15 44 103 026 | ZB2124

- power: 30 W
- replacement of incandescent bulb: 4× 18 W CFL
- luminous flux: 4 200 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 595 × 595 × 25 mm
- body colour: white
- line: LEXXO
- warranty period: 5 years
- UGR<: 22





4 200 lm | 30 W | IP20/IP44 | Dimmable | 120° | UGR < 22 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 125465

ZB2154 | 1/-/-/4

15 44 103 027 | ZB2154

TROXO

PROFI PLUS

- TROXO LED panels combine an attractive square design
- high luminous efficiency and energy savings
- pleasant diffused light with a very low glare index
- illuminates the room with enough intensity at an angle of 85°
- does not dazzle the surroundings with an wide beam angle
- 5 years warranty
- use: corridors, offices, classrooms, department stores

- power: 27 W
- replacement of incandescent bulb: 4× 18 W CFL
- luminous flux: 3 150 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 85°
- type of mounting: recessed
- dimensions: 595 × 595 × 23.2 mm
- body colour: white
- line: TROXO
- warranty period: 5 years
- UGR<: 16





3 150 lm | 27 W | IP20 | Dimmable | 85° | UGR < 16 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 097953

ZR1722 | 1/-/-/4

15 44 212 730 | ZR1722

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

VEXXO

PROFI PLUS

- the square or rectangular series are an effective option
- high efficiency and energy saving
- resistance to yellowing due to UV radiation
- integrated surface mounting frame
- 5 years warranty
- use: offices, classrooms and indoor areas

- power: 33 W
- replacement of incandescent bulb: 4× 18 W CFL
- luminous flux: 4 000 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 90°
- type of mounting: surface
- dimensions: 601 × 601 × 37 mm

- body colour: white
- line: VEXXO
- warranty period: 5 years
- UGR<: 19





4 000 lm | 33 W | IP20 | Dimmable | 90° | UGR < 19 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 132920


ZB1524 | 1/-/-/4

15 44 103 322 | ZB1524

- power: 33 W
- replacement of incandescent bulb: 2× 36 W CFL
- luminous flux: 4 000 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 90°
- type of mounting: surface
- dimensions: 1 201 × 301 × 37 mm

- body colour: white
- line: VEXXO
- warranty period: 5 years
- UGR<: 19





4 000 lm | 33 W | IP20 | Dimmable | 90° | UGR < 19 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 132944

ZB3524 | 1/-/-/4

15 44 203 322 | ZB3524

Luminaires

LED Panels

EXCLUSIVE

RIVI

EXCLUSIVE

- can be dimmed progressively by remote control
- ability to create and easily control groups of panels
- four preset light scenes
- 3 years warranty
- use: interiors in homes, offices or hotels

- power: 36 W
- replacement of incandescent bulb: 4× 18 W CFL
- luminous flux: 3 600 lm
- color temperature: 2 700–6 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 90°
- type of mounting: recessed
- dimensions: 595 × 595 × 10 mm

- dimming function
- body colour: white
- line: RIVI
- warranty period: 3 years
- UGR<: 19





3 600 lm | 36 W | IP20 | Dimmable | 90° | UGR < 19 | WARM WHITE / NEUTRAL WHITE / COOL WHITE | 3 YEARS WARRANTY

8 592920 097427

ZR5410	1/-/-/4
15 44 213 670	ZR5410

- product: remote controller for ZR5410
- designed for: Exclusive LED panels





8 592920 097830

ZR9041	1/-/-/100
15 44 300 001	ZR9041

Luminaires

LED Panels

PROFI

MAXXO

PROFI

- the square and rectangular for lighting office spaces
- high efficiency and energy saving
- pleasantly diffused light
- option to purchase a remote control for the ZR5410
- 3 years warranty
- use: offices, classrooms and indoor areas

- power: 36 W
- replacement of incandescent bulb: 4× 18 W CFL
- luminous flux: 4 100 lm
- color temperature: 3 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 90°
- type of mounting: recessed
- dimensions: 595 × 595 × 10 mm

- body colour: white
- line: MAXXO
- warranty period: 5 years
- UGR<: 19

4 100 lm | 36 W | IP20 | Dimmable | 90° | UGR < 19 | 3 000 K WARM WHITE | 5 YEARS WARRANTY





8 592920 124659

ZB1223 | 1/-/-/5
15 44 103 610 | ZB1223

- power: 36 W
- replacement of incandescent bulb: 4× 18 W CFL
- luminous flux: 4 320 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 595 × 595 × 10 mm

- body colour: white
- line: MAXXO
- warranty period: 5 years
- UGR<: 22

4 320 lm | 36 W | IP20 | Dimmable | 120° | UGR < 22 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY





8 592920 124635

ZB1214 | 1/-/-/5
15 44 103 628 | ZB1214

- power: 36 W
- replacement of incandescent bulb: 4× 18 W CFL
- luminous flux: 4 320 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 90°
- type of mounting: recessed
- dimensions: 595 × 595 × 10 mm

- body colour: white
- line: MAXXO
- warranty period: 5 years
- UGR<: 19

4 320 lm | 36 W | IP20 | Dimmable | 90° | UGR < 19 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY





8 592920 124673

ZB1224 | 1/-/-/5
15 44 103 629 | ZB1224

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- power: 36 W
- replacement of incandescent bulb: 2× 36 W CFL
- luminous flux: 4 320 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 1 195 × 295 × 10 mm

- body colour: white
- line: MAXXO
- warranty period: 5 years
- UGR<: 22



4 320 lm | 36 W | IP20 | Dimmable | 120° | UGR < 22 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 124697

ZB3214 | 1/-/-/5

15 44 103 630 | ZB3214

- power: 36 W
- replacement of incandescent bulb: 2× 36 W CFL
- luminous flux: 4 320 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 90°
- type of mounting: recessed
- dimensions: 1 195 × 295 × 10 mm

- body colour: white
- line: MAXXO
- warranty period: 5 years
- UGR<: 19



4 320 lm | 36 W | IP20 | Dimmable | 90° | UGR < 19 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 124710

ZB3224 | 1/-/-/5

15 44 103 631 | ZB3224

REXXO

PROFI

- modern energy-saving luminaires use backlit technology
- more uniform light emission and higher luminous efficiency
- outstanding performance and lighting quality – CRI ≥ 80
- pleasantly diffused light
- 3 years warranty
- use: offices, classrooms and indoor areas

- power: 36 W
- replacement of incandescent bulb: 4× 18 W CFL
- luminous flux: 4 000 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 595 × 595 × 24 mm

- body colour: white
- line: REXXO
- warranty period: 5 years
- UGR<: 22



4 000 lm | 36 W | IP20 | Dimmable | 120° | UGR < 22 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 121368

ZB2214 | 1/-/-/6

15 44 103 622 | ZB2214

- power: 36 W
- replacement of incandescent bulb: 4× 18 W CFL
- luminous flux: 4 000 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 595 × 595 × 24 mm

- body colour: white
- line: REXXO
- warranty period: 5 years
- UGR<: 19



4 000 lm | 36 W | IP20 | Dimmable | 120° | UGR < 19 | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 121382

ZB2224 | 1/-/-/6

15 44 103 623 | ZB2224

Luminaires

LED Panels


ESSENTIAL

DAXXO

ESSENTIAL

- more uniform light emission and higher luminous efficiency
- outstanding performance and lighting quality – CRI ≥ 80
- pleasantly diffused light
- use: offices, classrooms and indoor areas

- power: 36 W
- replacement of incandescent bulb: 4× 18 W CFL
- luminous flux: 3 600 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 595 × 595 × 30 mm
- body colour: white
- warranty period: 2 years
- UGR<: 22





3 600 lm | 36 W | IP20 | Dimmable | 120° | UGR < 22 | 4 000 K NEUTRAL WHITE

8 592920 119914

ZB2414	1/-/-/6
15 44 103 621	ZB2414

Luminaires

LED Panels

Accessories

ZR9001
15 42 009 001
8 592920 034415

1/-/-/100
ZR9001



product: spring set ▪ material: metal ▪ designed for: LED panel 60 × 60 (30) (PROXO, MAXXO) ▪ packaging: 4 ks, packet

ZR9002
15 42 009 002
8 592920 034439

1/-/-/100
ZR9002



product: spring set ▪ material: metal ▪ designed for: LED panel 30 × 120 (PROXO, MAXXO) ▪ packaging: 6 ks, packet

ZR9010
15 42 009 010
8 592920 034453

1/-/-/100
ZR9010



product: set of hooks ▪ material: metal ▪ designed for: LED panel 60 × 60 (30) (PROXO, MAXXO) ▪ packaging: 4 ks, packet

ZR9011
15 42 009 011
8 592920 034477

1/-/-/100
ZR9011



product: set of hooks ▪ material: metal ▪ designed for: LED panel 30 × 120 (PROXO, MAXXO) ▪ packaging: 6 ks, packet

ZR9020
15 42 009 020
8 592920 034491

1/-/-/100
ZR9020



product: set of ropes ▪ dimensions: 5 – 145 cm (cable length) ▪ material: metal ▪ designed for: LED panel 60 × 60 (30) (PROXO, MAXXO) ▪ packaging: 4 ks, packet

ZR9021
15 42 009 021
8 592920 034514

1/-/-/100
ZR9021



product: set of ropes ▪ dimensions: 5 – 145 cm (cable length) ▪ material: metal ▪ designed for: LED panel 30 × 120 (PROXO, MAXXO) ▪ packaging: 6 ks, packet

EMOS
A brand of legrand

www.emos.eu

Order Code / Item Number | Packaging Type

ZR9034 1/-/-/20

15 42 009 034 ZR9034

8 592920 076866



product: frame for surface installation ▪ dimensions: 600 × 600 × 45 mm ▪ material: aluminum ▪ designed for: LED panel 60 × 60 (PROXO, MAXXO) ▪ color: white ▪ packaging: 1 ks, box

ZR9035 1/-/-/15

15 42 009 035 ZR9035

8 592920 076880



product: frame for surface installation ▪ dimensions: 1 200 × 300 × 45 mm ▪ material: aluminum ▪ designed for: LED panel 30 × 120 (PROXO, MAXXO) ▪ color: white ▪ packaging: 1 ks, box

ZR9036 1/-/-/20

15 44 100 000 ZR9036

8 592920 106853



product: frame for surface installation ▪ dimensions: 600 × 600 × 70 mm ▪ material: aluminum ▪ designed for: Backlit panel 60 × 60 ▪ color: white ▪ packaging: 1 ks, box

ZR9041 1/-/-/100

15 44 300 001 ZR9041

8 592920 097830



product: remote controller for ZR5410 ▪ designed for: Exclusive LED panels

Luminaires

Drivers

- spare external drivers enabling dimming and controlling LED lights
- ensure optimal functioning, durability, energy efficiency and protection against damage to the LEDs
- 5 year warranty

ZZ1435T 1/-/-/50

15 60 014 350 ZZ1435T

8 592920 114322

14 W | 5 YEARS WARRANTY



- voltage input: 220–240 V AC
- frequency: 50/60 Hz
- output voltage: 25–40 V DC
- output current: 200–350 mA
- power: 14 W
- dimensions: 97 × 46 × 31 mm
- type: TRIAK
- warranty period: 5 years

ZZ2055T 1/-/-/50

15 60 020 550 ZZ2055T

8 592920 114339

20 W | 5 YEARS WARRANTY



- voltage input: 220–240 V AC
- frequency: 50/60 Hz
- output voltage: 25–40 V DC
- output current: 400–550 mA
- power: 20 W
- dimensions: 117 × 46 × 31 mm
- type: TRIAK
- warranty period: 5 years

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

ZZ3070T | 1/-/-/50

15 60 030 700 | ZZ3070T

8 592920 114346

28 W

5 YEARS WARRANTY



- voltage input: 220–240 V AC
- frequency: 50/60 Hz
- output voltage: 25–40 V DC
- output current: 550–700 mA
- power: 28 W
- dimensions: 117 × 46 × 31 mm
- type: TRIAK
- warranty period: 5 years

ZZ409BD | 1/-/-/48

15 60 040 900 | ZZ409BD

8 592920 107102

40 W

5 YEARS WARRANTY



- voltage input: 200–240 V AC
- frequency: 50/60 Hz
- output voltage: 6–42 V DC
- output current: 450–1 100 mA
- power: 40 W
- dimensions: 103 × 68 × 30 mm
- type: DALI 2.0, PUSH DIM
- warranty period: 5 years

Luminaires

Surface Luminaires

EXCLUSIVE

RIVI

EXCLUSIVE

- made of cast aluminium and acrylic glass
- suitable for surface mounting
- high-quality drivers LIFUD
- LGP - PMMA - pleasantly diffused light
- easy installation thanks to the installation console
- 3 years warranty
- use: interiors in homes, offices or hotels.

- power: 40 W
- luminous flux: 380–3 800 lm
- color temperature: 2 700–6 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 115°
- type of mounting: surface
- dimensions: 595 × 595 × 52 mm
- dimming function
- body colour: white
- line: RIVI
- warranty period: 3 years
- UGR<: 22

380–3 800 lm | 40 W | IP20 | Dimmable 10 %...100 % | 115° | WARM WHITE NEUTRAL WHITE COOL WHITE | 3 YEARS WARRANTY





8 592920 090480

ZM5173 | 1/-/-/4

15 44 103 603 | ZM5173

- power: 25 W
- luminous flux: 210–2 100 lm
- color temperature: 2 700–6 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 115°
- type of mounting: surface
- dimensions: 295 × 595 × 52 mm
- dimming function
- body colour: white
- line: RIVI
- warranty period: 3 years
- UGR<: 22

210–2 100 lm | 25 W | IP20 | Dimmable 10 %...100 % | 115° | WARM WHITE NEUTRAL WHITE COOL WHITE | 3 YEARS WARRANTY





8 592920 090466

ZM5172 | 1/-/-/4

15 44 102 400 | ZM5172

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- power: 20 W
- luminous flux: 140–1 400 lm
- color temperature: 2 700–6 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 115°
- type of mounting: surface
- dimensions: 295 × 295 × 52 mm
- dimming function
- body colour: white
- line: RIVI
- warranty period: 3 years
- UGR<: 22





140–1 400 lm | 20 W | IP20 | Dimmable 10 %...100 % | 115° | WARM WHITE NEUTRAL WHITE COOL WHITE | 3 YEARS WARRANTY

8 592920 090442

ZM5171 | 1/-/-/3

15 44 101 800 | ZM5171

ALVI

EXCLUSIVE

- rectangle and circular shape
- included frames in 2 colours for circular models
- very economical and durable LED diodes
- fluent dimmig via remote control
- durable metal body and difussers made of PMMA material
- light colour, timer and night light settings functions
- 3 years warranty
- use: interiors in households, offices or hotels

- power: 24 W
- replacement of incandescent bulb: 120 W
- luminous flux: 80–1 920 lm
- color temperature: 2 700–6 500 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 115°
- type of mounting: surface
- dimensions: 360 × 58 mm in diameter
- dimming function
- body colour: white
- line: ALVI
- warranty period: 3 years





80–1 920 lm | 24 W | IP20 | Dimmable 10 %...100 % | 115° | WARM WHITE NEUTRAL WHITE COOL WHITE | 3 YEARS WARRANTY

8 592920 089484

ZM5165 | 1/-/-/5

15 39 084 002 | ZM5165

- power: 36 W
- replacement of incandescent bulb: 170 W
- luminous flux: 140–2 880 lm
- color temperature: 2 700–6 500 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 115°
- type of mounting: surface
- dimensions: 500 × 60 mm in diameter
- dimming function
- body colour: white
- line: ALVI
- warranty period: 3 years





140–2 880 lm | 36 W | IP20 | Dimmable 10 %...100 % | 115° | WARM WHITE NEUTRAL WHITE COOL WHITE | 3 YEARS WARRANTY

8 592920 089507

ZM5166 | 1/-/-/5

15 39 084 003 | ZM5166

- power: 72 W
- replacement of incandescent bulb: 270 W
- luminous flux: 250–5 000 lm
- color temperature: 2 700–6 500 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 115°
- type of mounting: surface
- dimensions: 884 × 583 × 64 mm
- dimming function
- body colour: silver, white
- line: ALVI
- warranty period: 3 years





250–5 000 lm | 72 W | IP20 | Dimmable 5 %...100 % | 115° | WARM WHITE NEUTRAL WHITE COOL WHITE | 3 YEARS WARRANTY

8 592920 106150

ZM5167 | 1/-/-/2

15 39 087 000 | ZM5167

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

ILVI

EXCLUSIVE

- modern luminaires of premium quality in a circular shape
- very economical and durable LEDs
- fluent dimmig via remote control
- timer function, night light and HALO effect
- 3 years warranty
- use: interiors in households, offices or hotels

- power: 30 W
- replacement of incandescent bulb: 115 W
- luminous flux: 180–1 800 lm
- color temperature: 2 700–6 500 K
- body material: plastic (PS) + steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 400 × 70 mm in diameter

- dimming function
- body colour: white
- line: ILVI
- warranty period: 3 years





180–1 800 lm | 30 W | IP20 | Dimmable 5 %...100 % | 120° | WARM WHITE NEUTRAL WHITE COOL WHITE | 3 YEARS WARRANTY

8 592920 105924

ZM5168 | 1/-/-/5

15 39 094 300 | ZM5168

- power: 45 W
- replacement of incandescent bulb: 160 W
- luminous flux: 270–2 700 lm
- color temperature: 2 700–6 500 K
- body material: plastic (PS) + steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 500 × 70 mm in diameter

- dimming function
- body colour: white
- line: ILVI
- warranty period: 3 years





270–2 700 lm | 45 W | IP20 | Dimmable 5 %...100 % | 120° | WARM WHITE NEUTRAL WHITE COOL WHITE | 3 YEARS WARRANTY

8 592920 105900

ZM5169 | 1/-/-/5

15 39 094 450 | ZM5169

LIVI

EXCLUSIVE

- fluent dimming via remote control
- light colour adjustment
- timer and night light function
- 3 years warranty
- use: lighting of modern interiors, offices or hotels

- power: 30 W
- replacement of incandescent bulb: 110 W
- luminous flux: 1 800 lm
- color temperature: 2 700–6 500 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 115°
- type of mounting: surface
- dimensions: 400 × 85 mm in diameter

- dimming function
- body colour: white
- line: LIVI
- warranty period: 3 years





1 800 lm | 30 W | IP20 | Dimmable | 115° | WARM WHITE NEUTRAL WHITE COOL WHITE | 3 YEARS WARRANTY

8 592920 122907

ZM5162 | 1/-/-/5

15 39 087 301 | ZM5162

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- power: 45 W
- replacement of incandescent bulb: 160 W
- luminous flux: 2 700 lm
- color temperature: 2 700–6 500 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 115°
- type of mounting: surface
- dimensions: 500 × 90 mm in diameter
- dimming function
- body colour: white
- line: LIVI
- warranty period: 3 years





2 700 lm | 45 W | IP20 | Dimmable | 115° | WARM WHITE / NEUTRAL WHITE / COOL WHITE | 3 YEARS WARRANTY

8 592920 122921

ZM5163 | 1/-/-/5

15 39 087 451 | ZM5163

ILVI GoSmart

EMOS GoSmart

- Control via remote control or mobile app
- Adjustment of light intensity and colour
- Timer and night light function
- Connection to the home network via WIFI protocol
- Compatibility with EMOS GoSmart products and TUYA devices
- Voice control with Google Assistant and Amazon Alexa

Powered by

Works with Amazon Alexa Google Assistant

Download on the App Store | GET IT ON Google Play

- power: 30 W
- replacement of incandescent bulb: 110 W
- luminous flux: 1 800 lm
- color temperature: 2 700–6 500 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 115°
- type of mounting: surface
- dimensions: 400 × 70 mm in diameter
- dimming function
- body colour: white
- line: GoSmart
- warranty period: 3 years
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife,
- protocol: Wi-Fi
- transmission frequency: 2.4 GHz Wi-Fi
- control by voice assistants





Wi Fi | 180–1 800 lm | 30 W | Dimmable 10 %...100 % | CCT Tunable | OFF 30/60 min | CCT | 3 YEARS WARRANTY

8 592920 122570

ZM5191 | 1/-/-/5

15 39 087 300 | ZM5191

- power: 45 W
- replacement of incandescent bulb: 160 W
- luminous flux: 2 700 lm
- color temperature: 2 700–6 500 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 115°
- type of mounting: surface
- dimensions: 500 × 70 mm in diameter
- dimming function
- body colour: white
- line: GoSmart
- warranty period: 3 years
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife,
- protocol: Wi-Fi
- transmission frequency: 2.4 GHz Wi-Fi
- control by voice assistants





Wi Fi | 270–2 700 lm | 45 W | Dimmable 10 %...100 % | CCT Tunable | OFF 30/60 min | CCT | 3 YEARS WARRANTY

8 592920 122587

ZM5192 | 1/-/-/5

15 39 087 450 | ZM5192

Luminaires

Surface Luminaires

PROFI

NEXXO

PROFI

- economical surface-mount luminaires
- combination with high quality workmanship
- circular or square shape
- milky diffuser and IP44 degree of protection
- easy installation
- 3 years warranty
- use: corridors in houses, garages, utility rooms

- power: 7.6 W
- replacement of incandescent bulb: 50 W
- luminous flux: 680 lm
- color temperature: 3 000/3 500/4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 120 × 40 mm in diameter

- body colour: white
- line: NEXXO
- warranty period: 3 years





680 lm | 7.6 W | IP20 | CCT switch

3 000 K
3 500 K
4 000 K

3 YEARS WARRANTY

8 592920 109212

ZM5123 | 1/-/-/8

15 39 087 070 | ZM5123

- power: 7.6 W
- replacement of incandescent bulb: 50 W
- luminous flux: 680 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 120 × 40 mm in diameter

- body colour: white
- line: NEXXO
- warranty period: 3 years





680 lm | 7.6 W | IP40/IP20 | Dimmable

4 000 K
NEUTRAL WHITE

3 YEARS WARRANTY

8 592920 124130

ZM5125 | 1/-/-/8

15 39 085 070 | ZM5125

- power: 12.5 W
- replacement of incandescent bulb: 75 W
- luminous flux: 1 100 lm
- color temperature: 3 000/3 500/4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 170 × 42 mm in diameter

- body colour: white
- line: NEXXO
- warranty period: 3 years





1 100 lm | 12.5 W | IP20 | CCT switch

3 000 K
3 500 K
4 000 K

3 YEARS WARRANTY

8 592920 109250

ZM5133 | 1/-/-/8

15 39 087 120 | ZM5133

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- power: 12.5 W
- replacement of incandescent bulb: 75 W
- luminous flux: 1 100 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 170 × 42 mm in diameter

- body colour: white
- line: NEXXO
- warranty period: 3 years





1 100 lm | 12.5 W | IP40/IP20 | Dimmable

4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 124154

ZM5135 | 1/-/-/8

15 39 085 120 | ZM5135

- power: 21 W
- replacement of incandescent bulb: 120 W
- luminous flux: 1 900 lm
- color temperature: 3 000/3 500/4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 225 × 42 mm in diameter

- body colour: white
- line: NEXXO
- warranty period: 3 years





1 900 lm | 21 W | IP20 | CCT switch

3 000 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY

8 592920 109281

ZM5143 | 1/-/-/8

15 39 087 210 | ZM5143

- power: 21 W
- replacement of incandescent bulb: 120 W
- luminous flux: 1 900 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 225 × 42 mm in diameter

- body colour: white
- line: NEXXO
- warranty period: 3 years





1 900 lm | 21 W | IP40/IP20 | Dimmable

4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 124178

ZM5145 | 1/-/-/8

15 39 085 210 | ZM5145

- power: 28.5 W
- replacement of incandescent bulb: 160 W
- luminous flux: 2 700 lm
- color temperature: 3 000/3 500/4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 300 × 42 mm in diameter

- body colour: white
- line: NEXXO
- warranty period: 3 years





2 700 lm | 28.5 W | IP20 | CCT switch

3 000 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY

8 592920 109328

ZM5153 | 1/-/-/4

15 39 087 280 | ZM5153

- power: 28.5 W
- replacement of incandescent bulb: 160 W
- luminous flux: 2 700 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 300 × 42 mm in diameter

- body colour: white
- line: NEXXO
- warranty period: 3 years





2 700 lm | 28.5 W | IP40/IP20 | Dimmable

4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 124192

ZM5155 | 1/-/-/4

15 39 085 280 | ZM5155

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- power: 12.5 W
- replacement of incandescent bulb: 75 W
- luminous flux: 1 100 lm
- color temperature: 3 000/3 500/4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 170 × 42 mm in diameter
- body colour: brushed nickel
- line: NEXXO
- warranty period: 3 years





1 100 lm | 12.5 W | IP20 | CCT switch | 3 000 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY

8 592920 109359

ZM5233 | 1/-/-/8

15 39 087 121 | ZM5233

- power: 21 W
- replacement of incandescent bulb: 120 W
- luminous flux: 1 900 lm
- color temperature: 3 000/3 500/4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 225 × 42 mm in diameter
- body colour: brushed nickel
- line: NEXXO
- warranty period: 3 years





1 900 lm | 21 W | IP20 | CCT switch | 3 000 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY

8 592920 109403

ZM5243 | 1/-/-/8

15 39 087 211 | ZM5243

- power: 28.5 W
- replacement of incandescent bulb: 160 W
- luminous flux: 2 700 lm
- color temperature: 3 000/3 500/4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 300 × 42 mm in diameter
- body colour: brushed nickel
- line: NEXXO
- warranty period: 3 years





2 700 lm | 28.5 W | IP20 | CCT switch | 3 000 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY

8 592920 109434

ZM5253 | 1/-/-/4

15 39 087 281 | ZM5253

- power: 12.5 W
- replacement of incandescent bulb: 75 W
- luminous flux: 1 100 lm
- color temperature: 3 000/3 500/4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 170 × 42 mm in diameter
- body colour: black
- line: NEXXO
- warranty period: 3 years





1 100 lm | 12.5 W | IP20 | CCT switch | 3 000 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY

8 592920 109410

ZM5333 | 1/-/-/8

15 39 087 122 | ZM5333

- power: 21 W
- replacement of incandescent bulb: 120 W
- luminous flux: 1 900 lm
- color temperature: 3 000/3 500/4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 225 × 42 mm in diameter
- body colour: black
- line: NEXXO
- warranty period: 3 years





1 900 lm | 21 W | IP20 | CCT switch | 3 000 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY

8 592920 109380

ZM5343 | 1/-/-/8

15 39 087 212 | ZM5343

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- power: 28.5 W
- replacement of incandescent bulb: 160 W
- luminous flux: 2 700 lm
- color temperature: 3 000/3 500/4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 300 × 42 mm in diameter

- body colour: black
- line: NEXXO
- warranty period: 3 years





2 700 lm | 28.5 W | IP20 | CCT switch | 3 000 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY

8 592920 109342

ZM5353 | 1/-/-/4

15 39 087 282 | ZM5353

- power: 7.6 W
- replacement of incandescent bulb: 50 W
- luminous flux: 680 lm
- color temperature: 3 000/3 500/4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 120 × 120 × 40 mm

- body colour: white
- line: NEXXO
- warranty period: 3 years





680 lm | 7.6 W | IP20 | CCT switch | 3 000 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY

8 592920 109298

ZM6123 | 1/-/-/8

15 39 087 071 | ZM6123

- power: 7.6 W
- replacement of incandescent bulb: 50 W
- luminous flux: 680 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 120 × 120 × 40 mm

- body colour: white
- line: NEXXO
- warranty period: 3 years





680 lm | 7.6 W | IP40/IP20 | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 124215

ZM6125 | 1/-/-/8

15 39 085 071 | ZM6125

- power: 12.5 W
- replacement of incandescent bulb: 75 W
- luminous flux: 1 100 lm
- color temperature: 3 000/3 500/4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 170 × 170 × 42 mm

- body colour: white
- line: NEXXO
- warranty period: 3 years





1 100 lm | 12.5 W | IP20 | CCT switch | 3 000 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY

8 592920 109243

ZM6133 | 1/-/-/8

15 39 087 123 | ZM6133

- power: 12.5 W
- replacement of incandescent bulb: 75 W
- luminous flux: 1 100 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 170 × 170 × 42 mm

- body colour: white
- line: NEXXO
- warranty period: 3 years





1 100 lm | 12.5 W | IP40/IP20 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 124239

ZM6135 | 1/-/-/8

15 39 085 121 | ZM6135

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- power: 21 W
- replacement of incandescent bulb: 120 W
- luminous flux: 1 900 lm
- color temperature: 3 000/3 500/4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 225 × 225 × 42 mm
- body colour: white
- line: NEXXO
- warranty period: 3 years





1 900 lm | 21 W | IP20 | CCT switch | 3 000 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY

8 592920 109205

ZM6143 | 1/-/-/8

15 39 087 213 | ZM6143

- power: 21 W
- replacement of incandescent bulb: 120 W
- luminous flux: 1 900 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 225 × 225 × 42 mm
- body colour: white
- line: NEXXO
- warranty period: 3 years





1 900 lm | 21 W | IP40/IP20 | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 124253

ZM6145 | 1/-/-/8

15 39 085 211 | ZM6145

- power: 28.5 W
- replacement of incandescent bulb: 160 W
- luminous flux: 2 700 lm
- color temperature: 3 000/3 500/4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 300 × 300 × 42 mm
- body colour: white
- line: NEXXO
- warranty period: 3 years





2 700 lm | 28.5 W | IP20 | CCT switch | 3 000 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY

8 592920 109144

ZM6153 | 1/-/-/4

15 39 087 283 | ZM6153

- power: 28.5 W
- replacement of incandescent bulb: 160 W
- luminous flux: 2 700 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 300 × 300 × 42 mm
- body colour: white
- line: NEXXO
- warranty period: 3 years





2 700 lm | 28.5 W | IP40/IP20 | Dimmable | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 124277

ZM6155 | 1/-/-/4

15 39 085 281 | ZM6155

- power: 12.5 W
- replacement of incandescent bulb: 75 W
- luminous flux: 1 100 lm
- color temperature: 3 000/3 500/4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 170 × 170 × 42 mm
- body colour: brushed nickel
- line: NEXXO
- warranty period: 3 years





1 100 lm | 12.5 W | IP20 | CCT switch | 3 000 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY

8 592920 109090

ZM6233 | 1/-/-/8

15 39 087 124 | ZM6233

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- power: 21 W
- replacement of incandescent bulb: 120 W
- luminous flux: 1 900 lm
- color temperature: 3 000/3 500/4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 225 × 225 × 42 mm
- body colour: brushed nickel
- line: NEXXO
- warranty period: 3 years





1 900 lm | 21 W | IP20 | CCT switch | 3 000 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY

8 592920 109038

ZM6243 | 1/-/-/8

15 39 087 214 | ZM6243

- power: 28.5 W
- replacement of incandescent bulb: 50 W
- luminous flux: 2 700 lm
- color temperature: 3 000/3 500/4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 300 × 300 × 42 mm
- body colour: brushed nickel
- line: NEXXO
- warranty period: 3 years





2 700 lm | 28.5 W | IP20 | CCT switch | 3 000 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY

8 592920 108987

ZM6253 | 1/-/-/4

15 39 087 284 | ZM6253

- power: 12.5 W
- replacement of incandescent bulb: 75 W
- luminous flux: 1 100 lm
- color temperature: 3 000/3 500/4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 170 × 170 × 42 mm
- body colour: black
- line: NEXXO
- warranty period: 3 years





1 100 lm | 12.5 W | IP20 | CCT switch | 3 000 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY

8 592920 108949

ZM6333 | 1/-/-/8

15 39 087 125 | ZM6333

- power: 21 W
- replacement of incandescent bulb: 120 W
- luminous flux: 1 900 lm
- color temperature: 3 000/3 500/4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 225 × 225 × 42 mm
- body colour: black
- line: NEXXO
- warranty period: 3 years





1 900 lm | 21 W | IP20 | CCT switch | 3 000 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY

8 592920 108901

ZM6343 | 1/-/-/8

15 39 087 215 | ZM6343

- power: 28.5 W
- replacement of incandescent bulb: 160 W
- luminous flux: 2 700 lm
- color temperature: 3 000/3 500/4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 300 × 300 × 42 mm
- body colour: black
- line: NEXXO
- warranty period: 3 years





2 700 lm | 28.5 W | IP20 | CCT switch | 3 000 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY

8 592920 108864

ZM6353 | 1/-/-/4

15 39 087 285 | ZM6353

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

TIVI

PROFI

- ceiling lamps with a light source of energy class A
- high luminous efficacy and simple design.
- IP54 enclosure ensures water resistance
- easy installation
- use: indoor and outdoor environment of premises and houses

- power: 5.2 W
- replacement of incandescent bulb: 60 W
- luminous flux: 880 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: diameter 250 × 70 mm

- body colour: white
- line: TIVI
- warranty period: 5 years



880 lm | 5.2 W | IP44 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 124819

ZM3405 1/-/-/2

15 39 085 050 ZM3405

- power: 8.6 W
- replacement of incandescent bulb: 90 W
- luminous flux: 1 440 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: diameter 320 × 70 mm

- body colour: white
- line: TIVI
- warranty period: 5 years



1 440 lm | 8.6 W | IP44 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 124833

ZM3406 1/-/-/2

15 39 085 080 ZM3406

- power: 11 W
- replacement of incandescent bulb: 115 W
- luminous flux: 1 840 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 380 × 70 mm in diameter

- body colour: white
- line: TIVI
- warranty period: 5 years



1 840 lm | 11 W | IP44 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 124857

ZM3407 1/-/-/2

15 39 085 110 ZM3407

- power: 12.5 W
- replacement of incandescent bulb: 130 W
- luminous flux: 2 100 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 380 × 70 mm in diameter

- body colour: white
- line: TIVI
- warranty period: 5 years



2 100 lm | 12.5 W | IP44 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 5 YEARS WARRANTY

8 592920 124871

ZM3408 1/-/-/2

15 39 085 122 ZM3408

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

DIONI

PROFI

- design luminaire made of high quality plastic
- possibility to change the light colour temperature and light output during installation
- energy saving
- high IP54 protection guaranteeing water resistance
- 2 colour variants
- possibility of hanging installation with optional accessories
- use: indoor and outdoor environment of all rooms and houses

---

- power: 15 W
- replacement of incandescent bulb: 110 W
- luminous flux: 1 725 lm
- color temperature: 3 000/4 000/5 700 K
- body material: plastic
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: surface/hanging
- dimensions: diameter 280 × 62 mm

- body colour: white
- line: DIONI
- warranty period: 3 years



1 725 lm | 15 W | IP55 | Dimmable | 110° | 3 000 K / 4 000 K / 5 700 K | 3 YEARS WARRANTY

8 592920 132999

ZM7150 | 1/-/-/3

15 39 087 150 | C17280-AM-TW-DP

- power: 15 W
- replacement of incandescent bulb: 110 W
- luminous flux: 1 725 lm
- color temperature: 3 000/4 000/5 700 K
- body material: plastic
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: surface/hanging
- dimensions: diameter 280 × 62 mm

- body colour: black
- line: DIONI
- warranty period: 3 years



1 725 lm | 15 W | IP55 | Dimmable | 110° | 3 000 K / 4 000 K / 5 700 K | 3 YEARS WARRANTY

8 592920 133057

ZM7153 | 1/-/-/3

15 39 087 151 | C17280-AM-TW-DP

- power: 18 W
- replacement of incandescent bulb: 130 W
- luminous flux: 2 160 lm
- color temperature: 3 000/4 000/5 700 K
- body material: plastic
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: surface/hanging
- dimensions: diameter 360 × 65 mm

- body colour: white
- line: DIONI
- warranty period: 3 years



2 160 lm | 18 W | IP55 | Dimmable | 110° | 3 000 K / 4 000 K / 5 700 K | 3 YEARS WARRANTY

8 592920 133019

ZM7151 | 1/-/-/3

15 39 087 180 | C17360-AM-TW-DP

- power: 18 W
- replacement of incandescent bulb: 110 W
- luminous flux: 2 160 lm
- color temperature: 3 000/4 000/5 700 K
- body material: plastic
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: surface/hanging
- dimensions: diameter 360 × 65 mm

- body colour: black
- line: DIONI
- warranty period: 3 years



2 160 lm | 18 W | IP55 | Dimmable | 110° | 3 000 K / 4 000 K / 5 700 K | 3 YEARS WARRANTY

8 592920 133071

ZM7154 | 1/-/-/3

15 39 087 181 | C17360-AM-TW-DP

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number	Packaging Type

- power: 32 W
- replacement of incandescent bulb: 200 W
- luminous flux: 3 520 lm
- color temperature: 3 000/4 000/5 700 K
- body material: plastic
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: surface/hanging
- dimensions: diameter 410 × 65 mm
- body colour: white
- line: DIONI
- warranty period: 3 years



3 520 lm | 32 W | IP55 | Dimmable | 110° | 3 000 K / 4 000 K / 5 700 K | 3 YEARS WARRANTY

8 592920 133033

ZM7152	1/-/-/3
15 39 087 320	C17410-AM-TW-DP

- power: 32 W
- replacement of incandescent bulb: 200 W
- luminous flux: 3 520 lm
- color temperature: 3 000/4 000/5 700 K
- body material: plastic
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: surface/hanging
- dimensions: diameter 410 × 65 mm
- body colour: black
- line: DIONI
- warranty period: 3 years



3 520 lm | 32 W | IP55 | Dimmable | 110° | 3 000 K / 4 000 K / 5 700 K | 3 YEARS WARRANTY

8 592920 133095

ZM7155	1/-/-/3
15 39 087 321	C17410-AM-TW-DP

- product: hanging kit
- material: plastic (PC) + metal
- designed for: LED luminaires
- color: white
- packaging: 1 ks, box



8 592920 133118

ZM9000	1/-/-/2
15 90 900 001	ASP-C17AAA

- product: hanging kit
- material: plastic (PC) + metal
- designed for: LED luminaires
- color: black
- packaging: 1 ks, box



8 592920 133132

ZM9001	1/-/-/2
15 90 900 002	ASP-C17AAA

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

Luminaires

Surface Luminaires

CLASSIC

TORI

CLASSIC

- economical surface-mount luminaires
- combination with high quality workmanship
- circular or square shape
- milky diffuser and IP44 protection
- easy installation
- 3 years warranty
- use: corridors in houses, garages, utility rooms

- power: 15 W
- replacement of incandescent bulb: 80 W
- luminous flux: 1 500 lm
- color temperature: 3 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 220 × 53 mm in diameter

- body colour: white
- line: TORI
- warranty period: 3 years





1 500 lm | 15 W | IP54 | Dimmable | 120° | 3 000 K WARM WHITE | 3 YEARS WARRANTY

8 592920 094082

ZM4121 | 1/-/-/10

15 39 081 150 | ZM4121

- power: 15 W
- replacement of incandescent bulb: 100 W
- luminous flux: 1 500 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 220 × 53 mm in diameter

- body colour: white
- line: TORI
- warranty period: 3 years





1 500 lm | 15 W | IP54 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 094167

ZM4321 | 1/-/-/10

15 39 082 150 | ZM4321

- power: 24 W
- replacement of incandescent bulb: 145 W
- luminous flux: 2 400 lm
- color temperature: 3 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 330 × 53 mm in diameter

- body colour: white
- line: TORI
- warranty period: 3 years



2 400 lm | 24 W | IP54 | Dimmable | 120° | 3 000 K WARM WHITE | 3 YEARS WARRANTY

8 592920 094105

ZM4122 | 1/-/-/4

15 39 081 240 | ZM4122

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- power: 24 W
- replacement of incandescent bulb: 145 W
- luminous flux: 2 400 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 330 × 53 mm in diameter
- body colour: white
- line: TORI
- warranty period: 3 years



2 400 lm | 24 W | IP54 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 094181

ZM4322 | 1/-/-/4
15 39 082 240 | ZM4322

- power: 36 W
- replacement of incandescent bulb: 215 W
- luminous flux: 3 800 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 400 × 53 mm
- body colour: white
- line: TORI
- warranty period: 3 years





3 800 lm | 36 W | IP54 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 108185

ZM4325 | 1/-/-/4
15 39 085 360 | ZM4325

- power: 15 W
- replacement of incandescent bulb: 100 W
- luminous flux: 1 500 lm
- color temperature: 3 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 220 × 220 × 53 mm
- body colour: white
- line: TORI
- warranty period: 3 years



1 500 lm | 15 W | IP54 | Dimmable | 120° | 3 000 K WARM WHITE | 3 YEARS WARRANTY

8 592920 094129

ZM4123 | 1/-/-/10
15 39 081 151 | ZM4123

- power: 15 W
- replacement of incandescent bulb: 100 W
- luminous flux: 1 500 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 220 × 220 × 53 mm
- body colour: white
- line: TORI
- warranty period: 3 years



1 500 lm | 15 W | IP54 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 094204

ZM4323 | 1/-/-/10
15 39 082 151 | ZM4323

- power: 24 W
- replacement of incandescent bulb: 145 W
- luminous flux: 2 400 lm
- color temperature: 3 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 330 × 330 × 53 mm
- body colour: white
- line: TORI
- warranty period: 3 years



2 400 lm | 24 W | IP54 | Dimmable | 120° | 3 000 K WARM WHITE | 3 YEARS WARRANTY

8 592920 094143

ZM4124 | 1/-/-/4
15 39 081 241 | ZM4124

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- power: 24 W
- replacement of incandescent bulb: 145 W
- luminous flux: 2 400 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 330 × 330 × 53 mm
- body colour: white
- line: TORI
- warranty period: 3 years



2 400 lm | 24 W | IP54 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 094228

ZM4324 | 1/-/-/4

15 39 082 241 | ZM4324

- power: 15 W
- replacement of incandescent bulb: 100 W
- luminous flux: 1 500 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- motion sensor: MW
- beam angle: 120°
- sensor detection range: 10 m
- type of mounting: surface
- dimensions: 220 × 53 mm
- body colour: white
- line: TORI
- warranty period: 3 years





1 500 lm | 15 W | IP54 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 108208

ZM4328 | 1/-/-/6

15 39 085 150 | ZM4328

- power: 24 W
- replacement of incandescent bulb: 145 W
- luminous flux: 2 400 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- motion sensor: MW
- beam angle: 120°
- sensor detection range: 10 m
- type of mounting: surface
- dimensions: 330 × 53 mm
- body colour: white
- line: TORI
- warranty period: 3 years





2 400 lm | 24 W | IP54 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 108222

ZM4329 | 1/-/-/4

15 39 085 240 | ZM4329

CORI

CLASSIC

- ceiling luminaires/wall-mounted LED lights
- steel luminaire body with PMMA cover
- warm or neutral light colour
- high luminous efficacy
- conservative design
- integrated design
- 3 years warranty
- use: interiors, offices spaces, hotels, homes

- power: 18 W
- replacement of incandescent bulb: 100 W
- luminous flux: 1 530 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- motion sensor: MW
- beam angle: 120°
- sensor detection range: 6 m
- type of mounting: surface
- dimensions: 360 × 105 mm in diameter
- body colour: white
- line: CORI
- warranty period: 3 years





1 530 lm | 18 W | IP44 | Dimmable | 120° | MW Sensor | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 038628

ZM3412 | 1/-/-/2

15 39 034 120 | ZM3412

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- power: 22 W
- replacement of incandescent bulb: 125 W
- luminous flux: 1 980 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- motion sensor: MW
- beam angle: 120°
- sensor detection range: 6 m
- type of mounting: surface
- dimensions: 410 × 115 mm in diameter
- body colour: white
- line: CORI
- warranty period: 3 years





1 980 lm | 22 W | IP44 | Dimmable | 120° | MW Sensor | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 038642

ZM3413 | 1/-/-/6

15 39 034 130 | ZM3413

DORI

CLASSIC

- ceiling or wall-mounted round/square shaped luminaires
- high luminous efficacy and simple design
- the luminaires come in two shapes
- IP54 enclosure ensures water resistance
- easy installation
- use: indoor and outdoor environment of premises and houses

- power: 18 W
- replacement of incandescent bulb: 115 W
- luminous flux: 1 800 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 115°
- type of mounting: surface
- dimensions: 280 × 280 × 55 mm
- body colour: white
- line: DORI
- warranty period: 2 years





1 800 lm | 18 W | IP54 | Dimmable | 115° | 4 000 K NEUTRAL WHITE

8 592920 040546

ZM4311 | 1/-/-/8

15 39 043 050 | ZM4311

- power: 24.5 W
- replacement of incandescent bulb: 150 W
- luminous flux: 2 450 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 115°
- type of mounting: surface
- dimensions: 280 × 55 mm in diameter
- body colour: white
- line: DORI
- warranty period: 2 years





2 450 lm | 24.5 W | IP54 | Dimmable | 115° | 4 000 K NEUTRAL WHITE

8 592920 040560

ZM4312 | 1/-/-/8

15 39 043 060 | ZM4312

- power: 18 W
- replacement of incandescent bulb: 115 W
- luminous flux: 1 800 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 115°
- type of mounting: surface
- dimensions: 280 × 280 × 55 mm
- body colour: white
- line: DORI
- warranty period: 2 years



1 800 lm | 18 W | IP54 | Dimmable | 115° | 4 000 K NEUTRAL WHITE

8 592920 040584

ZM4313 | 1/-/-/8

15 39 043 070 | ZM4313

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- power: 24.5 W
- replacement of incandescent bulb: 150 W
- luminous flux: 2 450 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 115°
- type of mounting: surface
- dimensions: 280 × 280 × 55 mm
- body colour: white
- line: DORI
- warranty period: 2 years



2 450 lm | 24.5 W | IP54 | Dimmable | 115° | 4 000 K NEUTRAL WHITE

8 592920 040607

ZM4314 | 1/-/-/8

15 39 043 080 | ZM4314

ZURI

CLASSIC

- made of high-quality plastic
- 2in1 - possibility to change the colour of the luminaire body
- energy saving
- IP54 protection guarantees water resistance
- 2 colour frames included
- use: indoor and outdoor environment of premises and houses

- power: 14 W
- replacement of incandescent bulb: 70 W
- luminous flux: 1 000 lm
- color temperature: 3 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 215 × 80 mm in diameter
- body colour: black/white
- line: ZURI
- warranty period: 2 years





1 000 lm | 14 W | IP54 | Dimmable | 120° | 3 000 K WARM WHITE

8 592920 057117

ZM3130 | 1/-/-/6

15 39 071 140 | ZM3130

- power: 14 W
- replacement of incandescent bulb: 75 W
- luminous flux: 1 100 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 215 × 80 mm in diameter
- body colour: black/white
- line: ZURI
- warranty period: 2 years





1 100 lm | 14 W | IP54 | Dimmable | 120° | 4 000 K NEUTRAL WHITE

8 592920 057155

ZM3230 | 1/-/-/6

15 39 072 141 | ZM3230

- power: 14 W
- replacement of incandescent bulb: 75 W
- luminous flux: 1 000 lm
- color temperature: 3 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- motion sensor: PIR
- beam angle: 120°
- sensor detection range: 10 m
- type of mounting: surface
- dimensions: 215 × 80 mm in diameter
- body colour: black/white
- line: ZURI
- warranty period: 2 years





1 000 lm | 14 W | IP54 | Dimmable | 120° | PIR Sensor | 3 000 K WARM WHITE

8 592920 057131

ZM3131 | 1/-/-/6

15 39 071 240 | ZM3131

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- power: 14 W
- replacement of incandescent bulb: 75 W
- luminous flux: 1 100 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- motion sensor: PIR
- beam angle: 120°
- sensor detection range: 10 m
- type of mounting: surface
- dimensions: 215 × 80 mm in diameter
- body colour: black/white
- line: ZURI
- warranty period: 2 years





1 100 lm | 14 W | IP54 | Dimmable | 120° | PIR Sensor | 4 000 K NEUTRAL WHITE

8 592920 057179

ZM3231 | 1/-/-/6

15 39 072 240 | ZM3231

QARI

CLASSIC

- made of high-quality plastic
- circular and oval designs
- energy savings
- IP65 enclosure ensures water resistance
- use: indoor and outdoor environment of premises and houses

- power: 20 W
- replacement of incandescent bulb: 120 W
- luminous flux: 1 900 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 220 × 78 mm in diameter
- body colour: white
- line: QARI
- warranty period: 2 years





1 900 lm | 20 W | IP65 | Dimmable | 120° | 4 000 K NEUTRAL WHITE

8 592920 062098

ZM3010 | 1/-/-/6

15 39 722 000 | ZM3010

- power: 20 W
- replacement of incandescent bulb: 120 W
- luminous flux: 1 900 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 270 × 145 × 81 mm
- body colour: white
- line: QARI
- warranty period: 2 years





1 900 lm | 20 W | IP65 | Dimmable | 120° | 4 000 K NEUTRAL WHITE

8 592920 062135

ZM3020 | 1/-/-/8

15 39 722 010 | ZM3020

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

RORI

CLASSIC

- Residential luminaire with night light function (2 200K)-change function via wall switch
- possibility of changing the colour temperature of the light during installation
- energy saving
- 2 colour variants - white and black
- use: home interiors

- power: 17 W
- replacement of incandescent bulb: 100 W
- luminous flux: 1 400 lm
- color temperature: 2 700/3 500/4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 90
- beam angle: 110°
- type of mounting: surface
- dimensions: diameter 310 × 75 mm

- body colour: white
- line: RORI
- warranty period: 3 years



1 400 lm | 17 W | IP20 | Dimmable | 110° | 2 700 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY

8 592920 133156

ZM4400 | 1/-/-/3

15 39 087 170 | CF63 WHITE

- power: 17 W
- replacement of incandescent bulb: 100 W
- luminous flux: 1 100 lm
- color temperature: 2 700/3 500/4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 90
- beam angle: 110°
- type of mounting: surface
- dimensions: diameter 310 × 75 mm

- body colour: black
- line: RORI
- warranty period: 3 years



1 100 lm | 17 W | IP20 | Dimmable | 110° | 2 700 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY

8 592920 133170

ZM4401 | 1/-/-/3

15 39 087 171 | CF63 BLACK

Luminaires

Surface Luminaires

ESSENTIAL

RUBIC

ESSENTIAL

- made of high-quality plastic and custom for surface mounting
- long service lifewith minimal lossof luminosity
- built-in and mounted installation thanks to mounting frame
- high luminous efficiency
- integrated driver
- conservative design
- use: interior lighting in households

- power: 9 W
- replacement of incandescent bulb: 65 W
- luminous flux: 900 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 120 × 42 mm in diameter

- body colour: white
- line: RUBIC
- warranty period: 2 years





900 lm | 9 W | IP20

4 000 K NEUTRAL WHITE

8 592920 108505

ZM5432 | 1/-/-/36

15 39 085 092 | ZM5432

- power: 18 W
- replacement of incandescent bulb: 110 W
- luminous flux: 1 800 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 170 × 42 mm in diameter

- body colour: white
- line: RUBIC
- warranty period: 2 years





1 800 lm | 18 W | IP20

4 000 K NEUTRAL WHITE

8 592920 108468

ZM5442 | 1/-/-/24

15 39 085 182 | ZM5442

- power: 24 W
- replacement of incandescent bulb: 145 W
- luminous flux: 2 400 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 220 × 42 mm in diameter

- body colour: white
- line: RUBIC
- warranty period: 2 years





2 400 lm | 24 W | IP20

4 000 K NEUTRAL WHITE

8 592920 108413

ZM5452 | 1/-/-/12

15 39 085 242 | ZM5452

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- power: 9 W
- replacement of incandescent bulb: 65 W
- luminous flux: 900 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 120 × 120 × 42 mm

- body colour: white
- line: RUBIC
- warranty period: 2 years





900 lm | 9 W | IP20 | 4 000 K NEUTRAL WHITE

8 592920 108369

ZM6432 | 1/-/-/36

15 39 085 093 | ZM6432

- power: 18 W
- replacement of incandescent bulb: 110 W
- luminous flux: 1 800 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 170 × 170 × 42 mm

- body colour: white
- line: RUBIC
- warranty period: 2 years





1 800 lm | 18 W | IP20 | 4 000 K NEUTRAL WHITE

8 592920 108338

ZM6442 | 1/-/-/24

15 39 085 183 | ZM6442

- power: 24 W
- replacement of incandescent bulb: 145 W
- luminous flux: 2 400 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 220 × 220 × 42 mm

- body colour: white
- line: RUBIC
- warranty period: 2 years





2 400 lm | 24 W | IP20 | 4 000 K NEUTRAL WHITE

8 592920 108307

ZM6452 | 1/-/-/12

15 39 085 243 | ZM6452

FIONI

ESSENTIAL

- LED luminaire with 12 W, 18 W and 24 W
- neutral white light colour
- energy saving
- easy installation
- luminous efficacy 100 lm/W

- power: 12 W
- replacement of incandescent bulb: 80 W
- luminous flux: 1 200 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 255 × 63 mm in diameter

- body colour: white
- line: FIONI
- warranty period: 2 years



1 200 lm | 12 W | IP44 | Dimmable | 120° | 4 000 K NEUTRAL WHITE

8 592920 124574

ZM1120 | 1/-/-/4

15 39 085 123 | ZM1120

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- power: 18 W
- replacement of incandescent bulb: 110 W
- luminous flux: 1 800 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 330 × 75 mm in diameter

- body colour: white
- line: FIONI
- warranty period: 2 years



1 800 lm | 18 W | IP44 | Dimmable | 120° | 4 000 K NEUTRAL WHITE

8 592920 124598

ZM1121 | 1/-/-/2

15 39 085 184 | ZM1121

- power: 24 W
- replacement of incandescent bulb: 150 W
- luminous flux: 2 400 lm
- color temperature: 4 000 K
- body material: steel plate
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: surface
- dimensions: 390 × 80 mm in diameter

- body colour: white
- line: FIONI
- warranty period: 2 years



2 400 lm | 24 W | IP44 | Dimmable | 120° | 4 000 K NEUTRAL WHITE

8 592920 124611

ZM1122 | 1/-/-/2

15 39 085 245 | ZM1122

FLORI

ESSENTIAL

- quality luminaire with ceiling illumination
- in two different designs and two different sizes
- 2 colour variants - white and black
- energy saving
- easy installation
- use: home interiors

- power: 18 W
- replacement of incandescent bulb: 115 W
- luminous flux: 1 800 lm
- color temperature: 4 000 K
- body material: plastic
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: surface
- dimensions: diameter 293 × 29 mm

- body colour: white
- line: FLORI
- warranty period: 2 years



1 800 lm | 18 W | IP20 | Dimmable | 110° | 4 000 K NEUTRAL WHITE

8 592920 132340

ZM1400 | 1/-/-/6

15 39 085 186 | CL8105-021

- power: 18 W
- replacement of incandescent bulb: 115 W
- luminous flux: 1 800 lm
- color temperature: 4 000 K
- body material: plastic
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: surface
- dimensions: 293 × 293 × 29 mm

- body colour: white
- line: FLORI
- warranty period: 2 years



1 800 lm | 18 W | IP20 | Dimmable | 110° | 4 000 K NEUTRAL WHITE

8 592920 132388

ZM1402 | 1/-/-/6

15 39 085 187 | CL8109-031

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- power: 18 W
- replacement of incandescent bulb: 115 W
- luminous flux: 1 800 lm
- color temperature: 4 000 K
- body material: plastic
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: surface
- dimensions: diameter 293 × 29 mm

- body colour: black
- line: FLORI
- warranty period: 2 years



1 800 lm | 18 W | IP20 | Dimmable | 110° | 4 000 K NEUTRAL WHITE

8 592920 132425

ZM1404 | 1/-/-/6
15 39 085 188 | CL8106-022

- power: 18 W
- replacement of incandescent bulb: 115 W
- luminous flux: 1 800 lm
- color temperature: 4 000 K
- body material: plastic
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: surface
- dimensions: 293 × 293 × 29 mm

- body colour: black
- line: FLORI
- warranty period: 2 years



1 800 lm | 18 W | IP20 | Dimmable | 110° | 4 000 K NEUTRAL WHITE

8 592920 132463

ZM1406 | 1/-/-/6
15 39 085 189 | CL8105-021

- power: 22 W
- replacement of incandescent bulb: 130 W
- luminous flux: 2 200 lm
- color temperature: 4 000 K
- body material: plastic
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: surface
- dimensions: diameter 420 × 29 mm

- body colour: white
- line: FLORI
- warranty period: 2 years



2 200 lm | 22 W | IP20 | Dimmable | 110° | 4 000 K NEUTRAL WHITE

8 592920 132364

ZM1401 | 1/-/-/6
15 39 085 220 | CL8113-041

- power: 22 W
- replacement of incandescent bulb: 130 W
- luminous flux: 2 200 lm
- color temperature: 4 000 K
- body material: plastic
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: surface
- dimensions: 420 × 420 × 29 mm

- body colour: white
- line: FLORI
- warranty period: 2 years

2 200 lm | 22 W | IP20 | Dimmable | 110° | 4 000 K NEUTRAL WHITE

8 592920 132401

ZM1403 | 1/-/-/6
15 39 085 221 | CL8105-021

- power: 22 W
- replacement of incandescent bulb: 130 W
- luminous flux: 2 200 lm
- color temperature: 4 000 K
- body material: plastic
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: surface
- dimensions: diameter 420 × 29 mm

- body colour: black
- line: FLORI
- warranty period: 2 years



2 200 lm | 22 W | IP20 | Dimmable | 110° | 4 000 K NEUTRAL WHITE

8 592920 132449

ZM1405 | 1/-/-/6
15 39 085 222 | CL8114-042

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- power: 22 W
- replacement of incandescent bulb: 130 W
- luminous flux: 2 200 lm
- color temperature: 4 000 K
- body material: plastic
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: surface
- dimensions: 420 × 420 × 29 mm
- body colour: black
- line: FLORI
- warranty period: 2 years



2 200 lm | 22 W | IP20 | Dimmable | 110° | 4 000 K NEUTRAL WHITE

8 592920 132487

ZM1407 | 1/-/-/6

15 39 085 223 | CL8116-052

Luminaires

Surface Luminaires

Others

ZM9000 | 1/-/-/2

15 90 900 001 | ASP-C17AAA

8 592920 133118



- product: hanging kit
- material: plastic (PC) + metal
- designed for: LED luminaires
- color: white
- packaging: 1 ks, box

ZM9001 | 1/-/-/2

15 90 900 002 | ASP-C17AAA

8 592920 133132



- product: hanging kit
- material: plastic (PC) + metal
- designed for: LED luminaires
- color: black
- packaging: 1 ks, box

Luminaires

Pendant Luminaires

CLASSIC

CLASSIC

- for bulbs with socket E27
- ideal in combination with filament or vintage bulbs
- attractive design in copper and brass
- possibility to install your own shade
- 3 years warranty
- use: modern interiors, bars, hotels, restaurants

- body material: pressed sheet + alluminium
- type of mounting: hanging
- dimensions: 10 × 100 cm in diameter
- body colour: copper
- warranty period: 3 years





E27 IP20 VINTAGE DESIGN 3 YEARS WARRANTY

8 592920 068762

ZC3000 1/-/10/20

15 47 300 000 ZC3000

- body material: pressed sheet + alluminium
- type of mounting: hanging
- dimensions: 10 × 100 cm in diameter
- body colour: brass
- warranty period: 3 years





E27 IP20 VINTAGE DESIGN 3 YEARS WARRANTY

8 592920 068779

ZC3100 1/-/10/20

15 47 310 000 ZC3100

Luminaires

Recessed Luminaires

EXCLUSIVE

SIMMI

EXCLUSIVE

- elegant LED spotlights with tilt option
- have an integrated driver
- in white or with a brushed nickel surface finish
- top-quality and exclusive appearance
- 3 years warranty
- use: indoor and outdoor environment of premises and houses

- power: 5 W
- replacement of incandescent bulb: 50 W
- luminous flux: 450 lm
- color temperature: 3 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: recessed
- dimensions: 90 × 25 mm in diameter

- mounting hole: 68 mm
- body colour: white
- line: SIMMI
- warranty period: 3 years





450 lm | 5 W | IP20 | Dimmable | 110° | 3 000 K WARM WHITE | 3 YEARS WARRANTY

8 592920 054482

ZD3121 | 1/-/6/60

15 40 115 510 | ZD3121

- power: 5 W
- replacement of incandescent bulb: 50 W
- luminous flux: 450 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: recessed
- dimensions: 90 × 25 mm in diameter

- mounting hole: 68 mm
- body colour: white
- line: SIMMI
- warranty period: 3 years





450 lm | 5 W | IP20 | Dimmable | 110° | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 054512

ZD3122 | 1/-/6/60

15 40 115 570 | ZD3122

- power: 5 W
- replacement of incandescent bulb: 50 W
- luminous flux: 450 lm
- color temperature: 3 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: recessed
- dimensions: 80 × 25 mm in diameter

- mounting hole: 68 mm
- body colour: brushed nickel
- line: SIMMI
- warranty period: 3 years





450 lm | 5 W | IP20 | Dimmable | 110° | 3 000 K WARM WHITE | 3 YEARS WARRANTY

8 592920 054543

ZD3221 | 1/-/6/60

15 40 125 510 | ZD3221

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- power: 5 W
- replacement of incandescent bulb: 50 W
- luminous flux: 450 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 110°
- type of mounting: recessed
- dimensions: 80 × 25 mm in diameter

- mounting hole: 68 mm
- body colour: brushed nickel
- line: SIMMI
- warranty period: 3 years





450 lm | 5 W | IP20 | Dimmable | 110° | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 054574

ZD3222 | 1/-/6/60

15 40 125 570 | ZD3222

Luminaires

Recessed Luminaires

PROFI

NEXXO

PROFI

- made of cast aluminium and acrylic glass
- suitable for surface mounting
- high-quality drivers LIFUD
- LGP - PMMA - pleasantly diffused light
- easy installation thanks to the installation console
- 3 years warranty
- use: interiors in homes, offices or hotels.
- use: interior lighting in homes, offices, hotels

- power: 7 W
- replacement of incandescent bulb: 40 W
- luminous flux: 450 lm
- color temperature: 3 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 120 × 21 mm in diameter

- mounting hole: 105 mm
- body colour: white
- line: NEXXO
- warranty period: 3 years





450 lm | 7 W | IP20 | 3 000 K WARM WHITE | 3 YEARS WARRANTY

8 592920 108260

ZD1124 | 1/-/-/8

15 40 110 613 | ZD1124

- power: 7 W
- replacement of incandescent bulb: 40 W
- luminous flux: 480 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 120 × 21 mm in diameter

- mounting hole: 105 mm
- body colour: white
- line: NEXXO
- warranty period: 3 years





480 lm | 7 W | IP20 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 108284

ZD1125 | 1/-/-/8

15 40 110 623 | ZD1125

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- power: 12.5 W
- replacement of incandescent bulb: 70 W
- luminous flux: 1 000 lm
- color temperature: 3 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 170 × 21 mm in diameter

- mounting hole: 155 mm
- body colour: white
- line: NEXXO
- warranty period: 3 years





1 000 lm | 12.5 W | IP20 | 3 000 K WARM WHITE | 3 YEARS WARRANTY

8 592920 108321

ZD1134 | 1/-/-/8

15 40 111 214 | ZD1134

- power: 12.5 W
- replacement of incandescent bulb: 70 W
- luminous flux: 1 050 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 170 × 21 mm in diameter

- mounting hole: 155 mm
- body colour: white
- line: NEXXO
- warranty period: 3 years





1 050 lm | 12.5 W | IP20 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 108376

ZD1135 | 1/-/-/8

15 40 111 224 | ZD1135

- power: 18 W
- replacement of incandescent bulb: 100 W
- luminous flux: 1 500 lm
- color temperature: 3 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 225 × 21 mm in diameter

- mounting hole: 205 mm
- body colour: white
- line: NEXXO
- warranty period: 3 years





1 500 lm | 18 W | IP20 | 3 000 K WARM WHITE | 3 YEARS WARRANTY

8 592920 108406

ZD1144 | 1/-/-/8

15 40 111 813 | ZD1144

- power: 18 W
- replacement of incandescent bulb: 100 W
- luminous flux: 1 600 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 225 × 21 mm in diameter

- mounting hole: 205 mm
- body colour: white
- line: NEXXO
- warranty period: 3 years





1 600 lm | 18 W | IP20 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 108444

ZD1145 | 1/-/-/8

15 40 111 823 | ZD1145

- power: 25 W
- replacement of incandescent bulb: 125 W
- luminous flux: 2 000 lm
- color temperature: 3 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 300 × 21 mm mm in diameter

- mounting hole: 280 mm
- body colour: white
- line: NEXXO
- warranty period: 3 years





2 000 lm | 25 W | IP20 | 3 000 K WARM WHITE | 3 YEARS WARRANTY

8 592920 108482

ZD1154 | 1/-/-/4

15 40 112 413 | ZD1154

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- power: 25 W
- replacement of incandescent bulb: 125 W
- luminous flux: 2 100 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 300 × 21 mm mm in diameter
- mounting hole: 280 mm
- body colour: white
- line: NEXXO
- warranty period: 3 years





2 100 lm | 25 W | IP20 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 108529

ZD1155 | 1/-/-/4

15 40 112 423 | ZD1155

- power: 7 W
- replacement of incandescent bulb: 40 W
- luminous flux: 480 lm
- color temperature: 3 000/3 500/4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 120 × 21 mm in diameter
- mounting hole: 105 mm
- body colour: brushed nickel
- line: NEXXO
- warranty period: 3 years





480 lm | 7 W | IP20 | CCT switch | 3 000 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY

8 592920 108543

ZD1223 | 1/-/-/8

15 40 130 670 | ZD1223

- power: 12.5 W
- replacement of incandescent bulb: 70 W
- luminous flux: 1 050 lm
- color temperature: 3 000/3 500/4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 170 × 21 mm in diameter
- mounting hole: 155 mm
- body colour: brushed nickel
- line: NEXXO
- warranty period: 3 years





1 050 lm | 12.5 W | IP20 | CCT switch | 3 000 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY

8 592920 108581

ZD1233 | 1/-/-/8

15 40 131 270 | ZD1233

- power: 18 W
- replacement of incandescent bulb: 100 W
- luminous flux: 1 600 lm
- color temperature: 3 000/3 500/4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 225 × 21 mm in diameter
- mounting hole: 205 mm
- body colour: brushed nickel
- line: NEXXO
- warranty period: 3 years





1 600 lm | 18 W | IP20 | CCT switch | 3 000 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY

8 592920 108611

ZD1243 | 1/-/-/8

15 40 131 870 | ZD1243

- power: 7 W
- replacement of incandescent bulb: 40 W
- luminous flux: 480 lm
- color temperature: 3 000/3 500/4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 120 × 21 mm in diameter
- mounting hole: 105 mm
- body colour: black
- line: NEXXO
- warranty period: 3 years





480 lm | 7 W | IP20 | CCT switch | 3 000 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY

8 592920 108659

ZD1323 | 1/-/-/8

15 40 140 670 | ZD1323

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- power: 12.5 W
- replacement of incandescent bulb: 70 W
- luminous flux: 1 050 lm
- color temperature: 3 000/3 500/4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 170 × 21 mm in diameter
- mounting hole: 155 mm
- body colour: black
- line: NEXXO
- warranty period: 3 years

1 050 lm | 12.5 W | IP20 | CCT switch | 3 000 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY





8 592920 108680

ZD1333 1/-/-/8

15 40 141 270 ZD1333

- power: 18 W
- replacement of incandescent bulb: 100 W
- luminous flux: 1 600 lm
- color temperature: 3 000/3 500/4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 225 × 21 mm in diameter
- mounting hole: 205 mm
- body colour: black
- line: NEXXO
- warranty period: 3 years

1 600 lm | 18 W | IP20 | CCT switch | 3 000 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY





8 592920 108710

ZD1343 1/-/-/8

15 40 141 870 ZD1343

- power: 7 W
- replacement of incandescent bulb: 40 W
- luminous flux: 450 lm
- color temperature: 3 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 120 × 120 × 21 mm
- mounting hole: 105 × 105 mm
- body colour: white
- line: NEXXO
- warranty period: 3 years

450 lm | 7 W | IP20 | 3 000 K WARM WHITE | 3 YEARS WARRANTY





8 592920 108741

ZD2124 1/-/-/8

15 40 210 612 ZD2124

- power: 7 W
- replacement of incandescent bulb: 40 W
- luminous flux: 480 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 120 × 120 × 21 mm
- mounting hole: 105 × 105 mm
- body colour: white
- line: NEXXO
- warranty period: 3 years

480 lm | 7 W | IP20 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY





8 592920 108772

ZD2125 1/-/-/8

15 40 210 622 ZD2125

- power: 12.5 W
- replacement of incandescent bulb: 70 W
- luminous flux: 1 000 lm
- color temperature: 3 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 170 × 170 × 21 mm
- mounting hole: 155 × 155 mm
- body colour: white
- line: NEXXO
- warranty period: 3 years

1 000 lm | 12.5 W | IP20 | 3 000 K WARM WHITE | 3 YEARS WARRANTY





8 592920 108802

ZD2134 1/-/-/8

15 40 211 213 ZD2134

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- power: 12.5 W
- replacement of incandescent bulb: 70 W
- luminous flux: 1 050 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 170 × 170 × 21 mm

- mounting hole: 155 × 155 mm
- body colour: white
- line: NEXXO
- warranty period: 3 years





1 050 lm | 12.5 W | IP20 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 108840

ZD2135 | 1/-/-/8

15 40 211 223 | ZD2135

- power: 18 W
- replacement of incandescent bulb: 100 W
- luminous flux: 1 500 lm
- color temperature: 3 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 225 × 225 × 21 mm

- mounting hole: 205 × 205 mm
- body colour: white
- line: NEXXO
- warranty period: 3 years





1 500 lm | 18 W | IP20 | 3 000 K WARM WHITE | 3 YEARS WARRANTY

8 592920 108871

ZD2144 | 1/-/-/8

15 40 211 813 | ZD2144

- power: 18 W
- replacement of incandescent bulb: 100 W
- luminous flux: 1 600 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 225 × 225 × 21 mm

- mounting hole: 205 × 205 mm
- body colour: white
- line: NEXXO
- warranty period: 3 years





1 600 lm | 18 W | IP20 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 108918

ZD2145 | 1/-/-/8

15 40 211 823 | ZD2145

- power: 25 W
- replacement of incandescent bulb: 125 W
- luminous flux: 2 000 lm
- color temperature: 3 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 300 × 300 × 21 mm

- mounting hole: 280 × 280 mm
- body colour: white
- line: NEXXO
- warranty period: 3 years





2 000 lm | 25 W | IP20 | 3 000 K WARM WHITE | 3 YEARS WARRANTY

8 592920 108956

ZD2154 | 1/-/-/4

15 40 212 413 | ZD2154

- power: 25 W
- replacement of incandescent bulb: 125 W
- luminous flux: 2 100 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 300 × 300 × 21 mm

- mounting hole: 280 × 280 mm
- body colour: white
- line: NEXXO
- warranty period: 3 years





2 100 lm | 25 W | IP20 | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 108994

ZD2155 | 1/-/-/4

15 40 212 424 | ZD2155

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- power: 7 W
- replacement of incandescent bulb: 40 W
- luminous flux: 480 lm
- color temperature: 3 000/3 500/4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 120 × 120 × 21 mm

- mounting hole: 105 × 105 mm
- body colour: brushed nickel
- line: NEXXO
- warranty period: 3 years





480 lm | 7 W | IP20 | CCT switch | 3 000 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY

8 592920 109021

ZD2223 1/-/-/8

15 40 230 670 ZD2223

- power: 12.5 W
- replacement of incandescent bulb: 70 W
- luminous flux: 1 050 lm
- color temperature: 3 000/3 500/4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 170 × 170 × 21 mm

- mounting hole: 155 × 155 mm
- body colour: brushed nickel
- line: NEXXO
- warranty period: 3 years





1 050 lm | 12.5 W | IP20 | CCT switch | 3 000 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY

8 592920 109052

ZD2233 1/-/-/8

15 40 231 270 ZD2233

- power: 18 W
- replacement of incandescent bulb: 100 W
- luminous flux: 1 600 lm
- color temperature: 3 000/3 500/4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 225 × 225 × 21 mm

- mounting hole: 205 × 205 mm
- body colour: brushed nickel
- line: NEXXO
- warranty period: 3 years





1 600 lm | 18 W | IP20 | CCT switch | 3 000 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY

8 592920 109083

ZD2243 1/-/-/8

15 40 231 870 ZD2243

- power: 7 W
- replacement of incandescent bulb: 40 W
- luminous flux: 480 lm
- color temperature: 3 000/3 500/4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 120 × 120 × 21 mm

- mounting hole: 105 × 105 mm
- body colour: black
- line: NEXXO
- warranty period: 3 years





480 lm | 7 W | IP20 | CCT switch | 3 000 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY

8 592920 109120

ZD2323 1/-/-/8

15 40 240 670 ZD2323

- power: 12.5 W
- replacement of incandescent bulb: 70 W
- luminous flux: 1 050 lm
- color temperature: 3 000/3 500/4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 170 × 170 × 21 mm

- mounting hole: 155 × 155 mm
- body colour: black
- line: NEXXO
- warranty period: 3 years





1 050 lm | 12.5 W | IP20 | CCT switch | 3 000 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY

8 592920 109151

ZD2333 1/-/-/8

15 40 241 270 ZD2333

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- power: 18 W
- replacement of incandescent bulb: 100 W
- luminous flux: 1 600 lm
- color temperature: 3 000/3 500/4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 82
- beam angle: 110°
- type of mounting: recessed
- dimensions: 225 × 225 × 21 mm

- mounting hole: 205 × 205 mm
- body colour: black
- line: NEXXO
- warranty period: 3 years





1 600 lm | 18 W | IP20 | CCT switch | 3 000 K / 3 500 K / 4 000 K | 3 YEARS WARRANTY

8 592920 109182

ZD2343 | 1/-/-/8

15 40 241 870 | ZD2343

VIXXO

PROFI

- thin attractiveframeless LED luminaires
- high quality aluminium alloy with white exterior finish
- allow easy horizontal and vertical installation
- IP65 enclosure ensures water resistance
- 3 years warranty
- use: bathrooms and toilets, kitchen

- power: 6 W
- replacement of incandescent bulb: 42 W
- luminous flux: 500 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 70 × 20 mm in diameter

- mounting hole: 55 mm
- body colour: white
- line: VIXXO
- warranty period: 3 years





500 lm | 6 W | IP65 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 067888

ZV1112 | 1/-/4/20

15 40 110 621 | ZV1112

- power: 7,5 W
- replacement of incandescent bulb: 50 W
- luminous flux: 650 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 100 × 20 mm in diameter

- mounting hole: 80 mm
- body colour: white
- line: VIXXO
- warranty period: 3 years





650 lm | 7.5 W | IP65 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 067901

ZV1122 | 1/-/4/20

15 40 110 820 | ZV1122

- power: 10 W
- replacement of incandescent bulb: 65 W
- luminous flux: 900 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 125 × 20 mm in diameter

- mounting hole: 105 mm
- body colour: white
- line: VIXXO
- warranty period: 3 years





900 lm | 10 W | IP65 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 067949

ZV1132 | 1/-/4/16

15 40 111 120 | ZV1132

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- power: 13.5 W
- replacement of incandescent bulb: 85 W
- luminous flux: 1 250 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 155 × 20 mm in diameter
- mounting hole: 135 mm
- body colour: white
- line: VIXXO
- warranty period: 3 years





1 250 lm | 13.5 W | IP65 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 067963

ZV1142 | 1/-/-/10

15 40 111 520 | ZV1142

- power: 19 W
- replacement of incandescent bulb: 110 W
- luminous flux: 1 700 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 185 × 20 mm in diameter
- mounting hole: 165 mm
- body colour: white
- line: VIXXO
- warranty period: 3 years





1 700 lm | 19 W | IP65 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 067987

ZV1152 | 1/-/-/12

15 40 112 220 | ZV1152

- power: 6 W
- replacement of incandescent bulb: 42 W
- luminous flux: 500 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 75 × 75 × 20 mm
- mounting hole: 55 × 55 mm
- body colour: white
- line: VIXXO
- warranty period: 3 years





500 lm | 6 W | IP65 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 068021

ZV2112 | 1/-/4/20

15 40 210 621 | ZV2112

- power: 7,5 W
- replacement of incandescent bulb: 50 W
- luminous flux: 650 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 100 × 100 × 20 mm
- mounting hole: 80 × 80 mm
- body colour: white
- line: VIXXO
- warranty period: 3 years





650 lm | 7.5 W | IP65 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 068045

ZV2122 | 1/-/4/20

15 40 210 820 | ZV2122

- power: 10 W
- replacement of incandescent bulb: 65 W
- luminous flux: 900 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 125 × 125 × 20 mm
- mounting hole: 105 × 105 mm
- body colour: white
- line: VIXXO
- warranty period: 3 years





900 lm | 10 W | IP65 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 068083

ZV2132 | 1/-/4/16

15 40 211 120 | ZV2132

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- power: 13.5 W
- replacement of incandescent bulb: 85 W
- luminous flux: 1 250 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 155 × 155 × 20 mm
- mounting hole: 135 × 135 mm
- body colour: white
- line: VIXXO
- warranty period: 3 years





1 250 lm | 13.5 W | IP65 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 068106

ZV2142 | 1/-/-/10

15 40 211 520 | ZV2142

- power: 19 W
- replacement of incandescent bulb: 110 W
- luminous flux: 1 700 lm
- color temperature: 4 000 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 185 × 185 × 20 mm
- mounting hole: 165 × 165 mm
- body colour: white
- line: VIXXO
- warranty period: 3 years





1 700 lm | 19 W | IP65 | Dimmable | 120° | 4 000 K NEUTRAL WHITE | 3 YEARS WARRANTY

8 592920 068120

ZV2152 | 1/-/-/12

15 40 212 220 | ZV2152

GERI

PROFI

- can be tilted up to 90 degrees
- two colour variants
- easy installation
- 3 years warranty
- use: illumination of walls, shelves, paintings

- power: 6.5 W
- replacement of incandescent bulb: 40 W
- luminous flux: 780 lm
- color temperature: 2 700/4 000/6 500 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 36°
- type of mounting: recessed
- dimensions: diameter 105 × 40 mm
- mounting hole: 87 mm
- dimming function: yes – Triac
- body colour: white
- line: GERI
- warranty period: 3 years



780 lm | 6.5 W | IP20 | Dimmable TRIAC | 36° | 2 700 K / 4 000 K / 6 500 K | 3 YEARS WARRANTY

8 592920 133194

ZV1160 | 1/-/-/20

15 40 116 500 | GIMBALL

- power: 6.5 W
- replacement of incandescent bulb: 40 W
- luminous flux: 700 lm
- color temperature: 2 700/4 000/6 500 K
- body material: aluminum
- color rendering index (CRI): Ra > 80
- beam angle: 36°
- type of mounting: recessed
- dimensions: diameter 105 × 40 mm
- mounting hole: 87 mm
- dimming function: yes – Triac
- body colour: black
- line: GERI
- warranty period: 3 years



700 lm | 6.5 W | IP20 | Dimmable TRIAC | 36° | 2 700 K / 4 000 K / 6 500 K | 3 YEARS WARRANTY

8 592920 133217

ZV1161 | 1/-/-/20

15 40 146 500 | GIMBALL

Luminaires

Recessed Luminaires

ESSENTIAL

RUBIC

ESSENTIAL

- white are made of high-quality plastic
- designed to be recessed into plasterboard
- long service life with minimal loss of luminosity
- high luminous efficiency
- conservative design
- integrated driver
- use: interior lighting in households

- power: 9 W
- replacement of incandescent bulb: 65 W
- luminous flux: 900 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 120 × 26 mm in diameter

- mounting hole: 90–110 mm
- body colour: white
- line: RUBIC
- warranty period: 2 years





900 lm | 9 W | IP20

4 000 K NEUTRAL WHITE

8 592920 108819

ZD1432 | 1/-/-/48

15 39 085 090 | ZD1432

- power: 18 W
- replacement of incandescent bulb: 110 W
- luminous flux: 1 800 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 170 × 26 mm in diameter

- mounting hole: 140–160 mm
- body colour: white
- line: RUBIC
- warranty period: 2 years





1 800 lm | 18 W | IP20

4 000 K NEUTRAL WHITE

8 592920 108765

ZD1442 | 1/-/-/32

15 39 085 180 | ZD1442

- power: 24 W
- replacement of incandescent bulb: 145 W
- luminous flux: 2 400 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 220 × 26 mm in diameter

- mounting hole: 190–210 mm
- body colour: white
- line: RUBIC
- warranty period: 2 years





2 400 lm | 24 W | IP20

4 000 K NEUTRAL WHITE

8 592920 108703

ZD1452 | 1/-/-/16

15 39 085 244 | ZD1452

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- power: 9 W
- replacement of incandescent bulb: 65 W
- luminous flux: 900 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 120 × 120 × 26 mm

- mounting hole: 90–110 mm
- body colour: white
- line: RUBIC
- warranty period: 2 years





900 lm | 9 W | IP20

4 000 K
NEUTRAL WHITE

8 592920 108642

ZD2432
15 39 085 091

1/-/-/45
ZD2432

- power: 18 W
- replacement of incandescent bulb: 110 W
- luminous flux: 1 800 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 170 × 170 × 26 mm

- mounting hole: 140–160 mm
- body colour: white
- line: RUBIC
- warranty period: 2 years





1 800 lm | 18 W | IP20

4 000 K
NEUTRAL WHITE

8 592920 108604

ZD2442
15 39 085 181

1/-/-/32
ZD2442

- power: 24 W
- replacement of incandescent bulb: 145 W
- luminous flux: 2 400 lm
- color temperature: 4 000 K
- body material: plastic (PC)
- color rendering index (CRI): Ra > 80
- beam angle: 120°
- type of mounting: recessed
- dimensions: 220 × 220 × 26 mm

- mounting hole: 190–210 mm
- body colour: white
- line: RUBIC
- warranty period: 2 years





2 400 lm | 24 W | IP20

4 000 K
NEUTRAL WHITE

8 592920 108550

ZD2452
15 39 085 241

1/-/-/16
ZD2452

Luminaires

Emergency Luminaires

PROFI

CESSI

PROFI

- emergency luminaires are used in case of power failure
- ensure safe egress from rooms during a power outage
- sufficient backup power for 3 hours during a power outage
- test button and LED indicator for testing functionality
- 4 years warranty
- use: industrial buildings, garages, hallways, offices

- type of emergency operation test: manual button
- light color: cool white
- IP rating: IP20
- body material: plastic (PC)
- power voltage: 220–240 V AC
- input power: 3 W max.
- dimensions: 315 × 223 × 45 mm
- luminous flux: 30 lm
- color temperature: 5 000 K
- mounting type: attached
- warranty period: 4 years
- backup time: 3 h
- battery type: Ni-Cd
- battery capacity: 900 mAh
- type of emergency light operation: maintained/non-







30 lm | 3 W | IP20 | 6 500 K COOL WHITE | 4 YEARS WARRANTY

8 592920 091043

ZN1210	1/-/-/6
15 48 121 000	ZN1210

- body material: plastic (PC)
- dimensions: 386 × 80 × 74 mm
- mounting type: recessed
- warranty period: 4 years





4 YEARS WARRANTY

8 592920 091067

ZN1211	1/-/-/8
15 48 121 100	ZN1211

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

NESSI

PROFI

- emergency luminaires are used in case of power failure
- ensure safe egress from rooms during a power outage
- sufficient backup power for 3 hours during a power outage
- test button and LED indicator for testing functionality
- 4 years warranty
- use: industrial buildings, garages, hallways, offices

- type of emergency operation test: manual button
- light color: cool white
- IP rating: IP65
- body material: plastic (ABS)
- power voltage: 220–240 V AC
- input power: 3 W
- dimensions: 351 × 111 × 63 mm
- luminous flux: 150 lm
- color temperature: 6 500 K
- mounting type: attached
- warranty period: 4 years
- backup time: 3 h
- battery type: LiFePo4
- battery capacity: 1 500 mAh
- type of emergency light operation: maintained/non-



150 lm | 3 W | IP65 | 6 500 K COOL WHITE | 4 YEARS WARRANTY

8 592920 090640

ZN1110 | 1/-/-/10

15 48 111 000 | ZN1110

- body material: steel plate
- dimensions: 387 × 147 × 30 mm
- mounting type: recessed
- warranty period: 4 years



4 YEARS WARRANTY

8 592920 090817

ZN1111 | 1/-/-/10

15 48 111 100 | ZN1111

- IP rating: IP65
- body material: plastic (PC)
- dimensions: 350 × 113 × 192 mm
- warranty period: 4 years



IP65 | 4 YEARS WARRANTY

8 592920 090831

ZN1112 | 1/-/-/10

15 48 111 200 | ZN1112

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

ORSU

PROFI

- emergency luminaires are used in case of power failure
- ensure safe egress from rooms during a power outage
- sufficient backup power for 3 hours during a power outage
- test button and LED indicator for testing functionality
- 4 years warranty
- use: industrial and warehouse buildings, corridors, offices

---

- type of emergency operation test: manual button
- light color: cool white
- IP rating: IP20
- body material: plastic (PC)
- power voltage: 220–240 V AC
- input power: 3 W
- dimensions: 140 × 55 mm in diameter
- luminous flux: 240 lm
- color temperature: 6 500 K
- mounting type: recessed
- warranty period: 4 years
- backup time: 3 h
- battery type: LiFePo4
- battery capacity: 1 500 mAh
- type of emergency light operation: non-maintained





240 lm | 3 W | IP20 | 6 500 K COOL WHITE | 4 YEARS WARRANTY

8 592920 091081

ZN1310 | 1/-/-/12

15 48 131 000 | ZN1310

- body material: plastic (PC)
- dimensions: 140 × 55 mm in diameter
- mounting type: attached
- warranty period: 4 years





4 YEARS WARRANTY

8 592920 091104

ZN1311 | 1/-/-/12

15 48 131 100 | ZN1311

Luminaires

Emergency Luminaires

Emergency conversion kit

- type of emergency operation test: manual button
- IP rating: IP20
- body material: plastic (PC)
- power voltage: 220–240 V AC
- input power: 6 W max.
- dimensions: 212 × 73 × 28 mm
- warranty period: 3 years
- backup time: 1 h
- battery type: LiFePo4
- battery capacity: 1 500 mAh



8 592920 086001

ZR9310	1/-/-/20
15 48 931 000	ZR9310

Luminaires

Orientation Luminaires

CLASSIC

AMAL

CLASSIC

- orientation luminaires in brushed aluminium
- designed for recessed mounting
- the aluminium body and glass milk diffuse
- a superior service life
- minimal power consumption
- IP65 protection guarantees water resistance
- in neutral or warm white
- use: stairs, exterior facades, walls

- colour: stainless steel
- light color: warm white
- IP rating: IP65
- material of the diffuser: glass
- body material: aluminum
- mounting hole: 113 × 43 × 65 mm
- voltage: 220–240 V
- packaging: 1 pc, box
- power: 1.5 W

- dimensions: 123 × 53 × 61 mm
- luminous flux: 55 lm
- color temperature: 3 000 K
- source of light: LED
- lifetime: 30 000 hours



55 lm | 1.5 W | IP65 | Dimmable | 3 000 K WARM WHITE

8 592920 037348

ZC0108 | 1/-/-/24
15 45 000 080 | ZC0108

- colour: stainless steel
- light color: neutral white
- IP rating: IP65
- material of the diffuser: glass
- body material: aluminum
- mounting hole: 113 × 43 × 65 mm
- voltage: 220–240 V
- packaging: 1 pc, box
- power: 1.5 W

- dimensions: 123 × 53 × 61 mm
- luminous flux: 55 lm
- color temperature: 4 000 K
- source of light: LED
- lifetime: 30 000 hours




55 lm | 1.5 W | IP65 | Dimmable | 4 000 K NEUTRAL WHITE

8 592920 054789

ZC0110 | 1/-/-/24
15 45 000 100 | ZC0110

- colour: stainless steel
- light color: warm white
- IP rating: IP65
- material of the diffuser: glass
- body material: aluminum
- mounting hole: 75 × 70 mm
- voltage: 220–240 V
- packaging: 1 pc, box
- power: 1.5 W

- dimensions: 80 × 80 × 61 mm
- luminous flux: 75 lm
- color temperature: 3 000 K
- source of light: LED
- lifetime: 30 000 hours

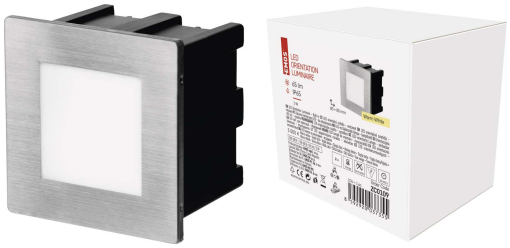

75 lm | 1.5 W | IP65 | Dimmable | 3 000 K WARM WHITE

8 592920 037355

ZC0109 | 1/-/-/24
15 45 000 090 | ZC0109

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- colour: stainless steel
- light color: neutral white
- IP rating: IP65
- material of the diffuser: glass
- body material: aluminum
- mounting hole: 75 × 70 mm
- voltage: 220–240 V
- packaging: 1 pc, box
- power: 2 W

- dimensions: 80 × 80 × 61 mm
- luminous flux: 70 lm
- color temperature: 4 000 K
- source of light: LED
- lifetime: 30 000 hours





70 lm | 2 W | IP65 | Dimmable

4 000 K
NEUTRAL WHITE

8 592920 054796

ZC0111 | 1/-/-/24

15 45 000 110 | ZC0111


DIRAL

CLASSIC

- in several shapes and sizes
- designed for recessed mounting
- the aluminium body and glass milk diffuse
- a superior service life
- IP65 protection guarantees water resistance
- for indoor and outdoor areas
- use: stairs, exteriors facades, walls

- colour: grey
- light color: warm white
- IP rating: IP65
- material of the diffuser: glass
- body material: aluminum
- mounting hole: 80 × 75 mm
- voltage: 220–240 V
- packaging: 1 pc, box
- power: 1 W

- dimensions: 90 × 90 × 71 mm
- luminous flux: 25 lm
- color temperature: 3 000 K
- source of light: LED
- lifetime: 30 000 hours





25 lm | 1 W | IP65 | Dimmable

3 000 K
WARM WHITE


8 592920 037317

ZC0105 | 1/-/-/16

15 45 000 050 | ZC0105

- colour: grey
- light color: warm white
- IP rating: IP65
- material of the diffuser: glass
- body material: aluminum
- mounting hole: 125 × 58 mm
- voltage: 220–240 V
- packaging: 1 pc, box
- power: 3 W

- dimensions: 140 × 70 × 71 mm
- luminous flux: 90 lm
- color temperature: 3 000 K
- source of light: LED
- lifetime: 30 000 hours





90 lm | 3 W | IP65 | Dimmable

3 000 K
WARM WHITE

8 592920 037324

ZC0106 | 1/-/-/16

15 45 000 060 | ZC0106

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

DIRBI


CLASSIC

- orientation luminaires for surface-mounted installation
- excellent price/quality ratio
- the ABS plastic body and polycarbonate diffuser
- a long service life
- minimal power consumption
- for indoor and outdoor areas
- IP65 protection guarantees water resistance
- use: stairs, exterior facades, walls

- colour: dark grey
- light color: neutral white
- IP rating: IP65
- material of the diffuser: polycarbonate
- body material: ABS
- voltage: 220–240 V
- packaging: 1 pc, box
- power: 3 W
- dimensions: 120 × 120 × 32 mm

- luminous flux: 100 lm
- color temperature: 4 000 K
- source of light: LED
- lifetime: 30 000 hours





100 lm | 3 W | IP65 | Dimmable

4 000 K NEUTRAL WHITE

8 592920 075586

ZC0114 | 1/-/-/18

15 45 000 140 | ZC0114

- colour: dark grey
- light color: neutral white
- IP rating: IP65
- material of the diffuser: polycarbonate
- body material: ABS
- voltage: 220–240 V
- packaging: 1 pc, box
- power: 1.5 W
- dimensions: 100 × 60 × 33 mm

- luminous flux: 80 lm
- color temperature: 4 000 K
- source of light: LED
- lifetime: 30 000 hours





80 lm | 1.5 W | IP65 | Dimmable

4 000 K NEUTRAL WHITE

8 592920 075609

ZC0116 | 1/-/-/40

15 45 000 160 | ZC0116

- colour: dark grey
- light color: neutral white
- IP rating: IP65
- material of the diffuser: polycarbonate
- body material: ABS
- voltage: 220–240 V
- packaging: 1 pc, box
- power: 3 W
- dimensions: 160 × 70 × 33 mm

- luminous flux: 150 lm
- color temperature: 4 000 K
- source of light: LED
- lifetime: 30 000 hours





150 lm | 3 W | IP65 | Dimmable

4 000 K NEUTRAL WHITE

8 592920 075616

ZC0117 | 1/-/-/30

15 45 000 170 | ZC0117

Luminaires

Cabinet Luminaires

CLASSIC

TIGO

CLASSIC

- energy-saving LED bars for embellishing a closet or kitchen unit
- lenghts from 300 mm to 1 150 mm
- option to interconnect different lenghts
- neutral white colour temperature
- simple installation

- power: 5 W
- length: 300 mm
- luminous flux: 500 lm
- color temperature: 4 000 K
- light color: neutral white
- material: aluminium (Al) + plastic
- dimensions: 300 × 22 × 30 mm
- lifetime: 25 000 hours
- beam angle: 120°

- packaging: 1 pc, small box



500 lm | 5 W | Dimmable | 120°

4 000 K
NEUTRAL WHITE

8 592920 017913

ZS2110 | 1/-/-/30

15 31 211 010 | ZS2110

- power: 10 W
- length: 600 mm
- luminous flux: 1 000 lm
- color temperature: 4 000 K
- light color: neutral white
- material: aluminium (Al) + plastic
- dimensions: 600 × 22 × 30 mm
- lifetime: 25 000 hours
- beam angle: 120°

- packaging: 1 pc, small box



1 000 lm | 10 W | Dimmable | 120°

4 000 K
NEUTRAL WHITE

8 592920 017937

ZS2120 | 1/-/-/30

15 31 211 020 | ZS2120

- power: 15 W
- length: 860 mm
- luminous flux: 1 500 lm
- color temperature: 4 000 K
- light color: neutral white
- material: aluminium (Al) + plastic
- dimensions: 860 × 22 × 30 mm
- lifetime: 25 000 hours
- beam angle: 120°

- packaging: 1 pc, small box



1 500 lm | 15 W | Dimmable | 120°

4 000 K
NEUTRAL WHITE

8 592920 017951

ZS2130 | 1/-/-/30

15 31 211 030 | ZS2130

- power: 20 W
- length: 1 150 mm
- luminous flux: 2 000 lm
- color temperature: 4 000 K
- light color: neutral white
- material: aluminium (Al) + plastic
- dimensions: 1 150 × 22 × 30 mm
- lifetime: 25 000 hours
- beam angle: 120°
- packaging: 1 pc, small box



2 000 lm | 20 W | Dimmable | 120° | 4 000 K NEUTRAL WHITE

8 592920 017975

ZS2140 | 1/-/-/30
15 31 211 040 | ZS2140

Luminaires

Desk and Floor Lamps

- stylish table or floor lamps
- suitable for the study or children's room
- selected models allow wireless charging of mobile phones,
- night light function, timer or dimming function
- retro lamps with E27 base

- model: MIA
- power: 5.6 W
- luminous flux: 150 lm
- colour: black
- supply cable length: 1 m
- power adaptor: USB
- power adaptor included: yes (USB cable)
- color temperature: 3 000/5 000/6 500 K
- dimensions: 30 cm
- color rendering index (CRI): Ra >95
- packaging: 1 pc, box





150 lm | 5.6 W | Dimmable | WARM WHITE / NEUTRAL WHITE / COOL WHITE | REAL COLORS CRI>95 | USB 100 cm

8 592920 122402

Z7625 | 1/-/-/20
15 38 189 000 | Z7625

- model: LUCY
- power: 2 W
- luminous flux: 100 lm
- colour: white
- supply cable length: 1 m
- power adaptor: USB cable
- power adaptor included: yes (USB cable)
- color temperature: 5 000 K
- dimensions: 80 × 80 × 300 mm
- color rendering index (CRI): Ra >80
- packaging: 1 pc, box





100 lm | 2 W | Dimmable | 4 000 K NEUTRAL WHITE | 96 h BATTERY LIFE | USB 100 cm

8 592920 122419

Z7626 | 1/-/-/6
15 38 190 000 | Z7626

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- model: EMILY
- power: 2 W
- luminous flux: 100 lm
- colour: white
- supply cable length: 1 m
- power adaptor: USB cable
- power adaptor included: yes (USB cable)
- color temperature: 5 000 K
- dimensions: 80 × 80 × 300 mm

- color rendering index (CRI): Ra >80
- packaging: 1 pc, box





100 lm | 2 W | Dimmable

4 000 K NEUTRAL WHITE | 96 h BATTERY LIFE | USB 100 cm

8 592920 122426

Z7627 | 1/-/-/16

15 38 191 000 | Z7627

- model: CHARLES
- power: 7.6 W
- luminous flux: 550 lm
- colour: white
- supply cable length: 1,3 m
- power adaptor: 12 V/450 mA
- power adaptor included
- color temperature: 3 000–6 500 K
- dimensions: 420 × 165 × 165 mm

- color rendering index (CRI): Ra >80
- packaging: 1 pc, box





550 lm | 7.6 W | Dimmable

4 000 K NEUTRAL WHITE | 130 cm

8 592920 122440

Z7628W | 1/-/-/2

15 38 192 000 | Z7628W

- model: CHARLES
- power: 7.6 W
- luminous flux: 550 lm
- colour: black
- supply cable length: 1,3 m
- power adaptor: 12 V/450 mA
- power adaptor included
- color temperature: 3 000–6 500 K
- dimensions: 420 × 165 × 165 mm

- color rendering index (CRI): Ra >80
- packaging: 1 pc, box





550 lm | 7.6 W | Dimmable

WARM WHITE NEUTRAL WHITE COOL WHITE | 130 cm

8 592920 122433

Z7628B | 1/-/-/2

15 38 193 000 | Z7628B

- model: LILY
- power: 13.5
- luminous flux: 760 lm
- colour: white
- supply cable length: 1.5 m
- power adaptor: 10 V/1 A
- power adaptor included
- color temperature: 3 000/4 000/6 500 K
- dimensions: 330 × 130 × 150 mm

- color rendering index (CRI): Ra > 90
- packaging: 1 pc, box





760 lm | 13.5 W | Dimmable

WARM WHITE NEUTRAL WHITE COOL WHITE | 130 cm

8 592920 122464

Z7629W | 1/-/-/4

15 38 194 000 | Z7629W

- model: LILY
- power: 13.5
- luminous flux: 760 lm
- colour: black
- supply cable length: 1.5 m
- power adaptor: 10 V/1 A
- power adaptor included
- color temperature: 3 000/4 000/6 500 K
- dimensions: 330 × 130 × 150 mm

- color rendering index (CRI): Ra > 90
- packaging: 1 pc, box





760 lm | 13.5 W | Dimmable

WARM WHITE NEUTRAL WHITE COOL WHITE | 130 cm

8 592920 122457

Z7629B | 1/-/-/4

15 38 195 000 | Z7629B

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- model: KATIE
- power: 4 W
- luminous flux: 250 lm
- colour: white
- supply cable length: 1.5 m
- power adaptor: 5 V/1 A
- power adaptor included
- color temperature: 3 000/4 000/5 000 K
- dimensions: 330 × 130 × 150 mm
- packaging: 1 pc, box




250 lm | 4 W | IP44 | Dimmable | WARM WHITE NEUTRAL WHITE COOL WHITE | USB 150 cm

8 592920 122488

Z7630W 15 38 196 000 | 1/-/-/2 Z7630W

- model: KATIE
- power: 4 W
- luminous flux: 250 lm
- colour: black
- supply cable length: 1.5 m
- power adaptor: 5 V/1 A
- power adaptor included
- color temperature: 3 000/4 000/5 000 K
- dimensions: 330 × 130 × 150 mm
- packaging: 1 pc, box




250 lm | 4 W | IP44 | Dimmable | WARM WHITE NEUTRAL WHITE COOL WHITE | USB 150 cm

8 592920 122471

Z7630B 15 38 197 000 | 1/-/-/2 Z7630B

- model: AVA
- power: 5.6 W
- luminous flux: 200 lm
- colour: black
- supply cable length: 1.5 m
- power adaptor: USB cable
- power adaptor included: yes (USB cable)
- color temperature: 3 000/4 000/5 000 K
- dimensions: 460 × 105 × 53 mm
- color rendering index (CRI): Ra >95
- packaging: 1 pc, box




200 lm | 5.6 W | Dimmable | WARM WHITE NEUTRAL WHITE COOL WHITE | USB 150 cm

8 592920 101070

Z7617 15 38 179 000 | 1/-/-/10 Z7617

- model: CARSON
- power: 6 W
- luminous flux: 400 lm
- colour: black
- supply cable length: 1.5 m
- power adaptor: 12 V/1 000 mA
- power adaptor included
- color temperature: 2 700–6 600 K
- dimensions: 330 × 290 mm
- USB port
- color rendering index (CRI): Ra >80
- packaging: 1 pc, box




400 lm | 6 W | Dimmable | Timer | USB OUT | WARM WHITE NEUTRAL WHITE COOL WHITE | 150 cm

8 592920 112946

Z7618B 15 38 180 000 | 1/-/-/6 Z7618B

- model: CARSON
- power: 6 W
- luminous flux: 400 lm
- colour: white
- supply cable length: 1.5 m
- power adaptor: 12 V/1 000 mA
- power adaptor included
- color temperature: 2 700–6 600 K
- dimensions: 330 × 290 mm
- USB port
- color rendering index (CRI): Ra >80
- packaging: 1 pc, box




400 lm | 6 W | Dimmable | Timer | USB OUT | WARM WHITE NEUTRAL WHITE COOL WHITE | 150 cm

8 592920 112960

Z7618W 15 38 181 000 | 1/-/-/6 Z7618W

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- model: CHASE
- power: 7.8 W
- luminous flux: 450 lm
- colour: black
- supply cable length: 1.5 m
- power adaptor: 12 V/500 mA
- power adaptor included
- color temperature: 2 700–6 500 K
- dimensions: 370 × 340 mm

- color rendering index (CRI): Ra >80
- packaging: 1 pc, box





450 lm | 7.8 W | Dimmable

WARM WHITE / NEUTRAL WHITE / COOL WHITE | 150 cm

8 592920 112984

Z7619B | 1/-/-/8

15 38 182 000 | Z7619B

- model: CHASE
- power: 7.8 W
- luminous flux: 450 lm
- colour: white
- supply cable length: 1.5 m
- power adaptor: 12 V/500 mA
- power adaptor included
- color temperature: 2 700–6 500 K
- dimensions: 370 × 340 mm

- color rendering index (CRI): Ra >80
- packaging: 1 pc, box





450 lm | 7.8 W | Dimmable

WARM WHITE / NEUTRAL WHITE / COOL WHITE | 150 cm

8 592920 113004

Z7619W | 1/-/-/8

15 38 183 000 | Z7619W

- model: WESLEY
- power: 12 W
- luminous flux: 700 lm
- colour: black
- supply cable length: 1.5 m
- power adaptor: 15 V/800 mA
- power adaptor included
- color temperature: 2 700–6 000 K
- dimensions: 430 × 180 mm

- color rendering index (CRI): Ra >95
- packaging: 1 pc, box





700 lm | 12 W | Dimmable

WARM WHITE / NEUTRAL WHITE / COOL WHITE | 150 cm | REAL COLORS CRI>95

8 592920 113028

Z7620B | 1/-/-/2

15 38 184 000 | Z7620B

- model: WESLEY
- power: 12 W
- luminous flux: 700 lm
- colour: white
- supply cable length: 1.5 m
- power adaptor: 15 V/800 mA
- power adaptor included
- color temperature: 2 700–6 000 K
- dimensions: 430 × 180 mm

- color rendering index (CRI): Ra >95
- packaging: 1 pc, box





700 lm | 12 W | Dimmable

WARM WHITE / NEUTRAL WHITE / COOL WHITE | 150 cm | REAL COLORS CRI>95

8 592920 113042

Z7620W | 1/-/-/2

15 38 185 000 | Z7620W

- model: KAREN
- power: 9.2 W
- luminous flux: 640 lm
- colour: black
- supply cable length: 1,3 m
- power adaptor: USB cable
- power adaptor included: yes (USB cable)
- color temperature: 3 000/4 000/6 000 K
- dimensions: 200 × 550 × 700 mm

- USB port: no + wireless charging
- color rendering index (CRI): Ra >80
- packaging: 1 pc, box





640 lm | 9.2 W | Dimmable | Wireless charging

WARM WHITE / NEUTRAL WHITE / COOL WHITE | 130 cm

8 592920 097892

Z7615 | 1/-/-/5

15 38 176 000 | Z7615

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- model: STELLA
- power: 6.5 W
- luminous flux: 400 lm
- colour: blue
- supply cable length: 1.7 m
- power adaptor: 12 V/400 mA
- power adaptor included
- number of LED: 12
- color temperature: 4 000 K

- dimensions: 160 × 550 × 345 mm
- color rendering index (CRI): Ra >80
- packaging: 1 pc, box





400 lm | 6.5 W | Dimmable | 4 000 K NEUTRAL WHITE | 170 cm

8 592920 079881

Z7602BL | 1/-/-/4

15 38 157 000 | Z7602BL

- model: STELLA
- power: 6.5 W
- luminous flux: 400 lm
- colour: pink
- supply cable length: 1.7 m
- power adaptor: 12 V/400 mA
- power adaptor included
- number of LED: 12
- color temperature: 4 000 K

- dimensions: 160 × 550 × 345 mm
- color rendering index (CRI): Ra >80
- packaging: 1 pc, box





400 lm | 6.5 W | Dimmable | 4 000 K NEUTRAL WHITE | 170 cm

8 592920 079904

Z7602P | 1/-/-/4

15 38 156 000 | Z7602P

- model: STELLA
- power: 6.5 W
- luminous flux: 400 lm
- colour: black
- supply cable length: 1.7 m
- power adaptor: 12 V/400 mA
- power adaptor included
- color temperature: 4 000 K
- dimensions: 160 × 550 × 345 mm

- color rendering index (CRI): Ra >80
- packaging: 1 pc, box





400 lm | 6.5 W | Dimmable | 4 000 K NEUTRAL WHITE | 170 cm

8 592920 079867

Z7602B | 1/-/-/4

15 38 155 000 | Z7602B

- model: STELLA
- power: 6.5 W
- luminous flux: 400 lm
- colour: white
- supply cable length: 1.7 m
- power adaptor: 12 V/400 mA
- power adaptor included
- number of LED: 12
- color temperature: 4 000 K

- dimensions: 160 × 550 × 345 mm
- color rendering index (CRI): Ra >80
- packaging: 1 pc, box





400 lm | 6.5 W | Dimmable | 4 000 K NEUTRAL WHITE | 170 cm

8 592920 079843

Z7602W | 1/-/-/4

15 38 154 000 | Z7602W

- model: EDDY
- power: 6 W
- luminous flux: 480 lm
- colour: white
- supply cable length: 1.8 m
- power adaptor: 12 V/0.36 A
- power adaptor included
- number of LED: 24
- color temperature: 3 000/4 500/6 800 K

- dimensions: 170 × 105 × 350 mm
- color rendering index (CRI): Ra > 83
- packaging: 1 pc, box





480 lm | 6 W | Dimmable | WARM WHITE NEUTRAL WHITE COOL WHITE | 180 cm

8 592920 048788

Z7599W | 1/-/-/6

15 38 150 201 | Z7599W

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- model: EDDY
- power: 6 W
- luminous flux: 480 lm
- colour: black
- supply cable length: 1.8 m
- power adaptor: 12 V/0.36 A
- power adaptor included
- number of LED: 24
- color temperature: 3 000/4 500/6 800 K
- dimensions: 170 × 105 × 350 mm
- color rendering index (CRI): Ra > 83
- packaging: 1 pc, box





480 lm | 6 W | Dimmable | WARM WHITE / NEUTRAL WHITE / COOL WHITE | 180 cm

8 592920 048764

Z7599B 1/-/-/6

15 38 150 200 Z7599B

- model: JULIAN
- colour: black
- supply cable length: 1.5 m
- power adaptor: 220–240 V
- dimensions: 460 × 200 mm
- packaging: 1 pc, box





E27 | Dimmable | 150 cm

8 592920 113066

Z7621B 1/-/-/2

15 38 186 000 Z7621B

- model: JULIAN
- colour: white
- supply cable length: 1.5 m
- power adaptor: 220–240 V
- dimensions: 460 × 200 mm
- packaging: 1 pc, box





E27 | Dimmable | 150 cm

8 592920 113103

Z7621W 1/-/-/2

15 38 187 000 Z7621W

- model: JULIAN
- colour: blue
- supply cable length: 1.5 m
- power adaptor: 220–240 V
- dimensions: 460 × 200 mm
- packaging: 1 pc, box





E27 | Dimmable | 150 cm

8 592920 113080

Z7621BL 1/-/-/2

15 38 188 000 Z7621BL

- model: LUCAS
- colour: white
- supply cable length: 1.5 m
- power adaptor: 220–240 V
- dimensions: 480 × 155 × 330 mm
- packaging: 1 pc, box





E27 | Dimmable | 150 cm

8 592920 088180

Z7609W 1/-/-/2

15 38 169 000 Z7609W

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- model: ARTHUR
- colour: dark grey
- supply cable length: 1.8 m
- power adaptor: 220–240 V
- dimensions: 850 × 280 × 1 510 mm
- packaging: 1 pc, box





E27 | Dimmable | 180 cm

8 592920 088203

Z7610 | 1/-/-/1
15 38 170 000 | Z7610

Sensors

- products with PIR and MW technology
- MW sensors are less demanding on placement than PIR
- also function as switches for lights, outdoor floodlights or alarms
- detection angle of either 180° or 360° and range of 6–12 m
- selected products can also send a command to open doors or gate

- detection angle: 360°
- detection distance: 6 m
- switching time: 5 s, 30 s, 1 min, 3 min, 5 min, 8 min
- IP rating: IP20
- sensor type: PIR
- power source: 230 V~/50 Hz
- max. resistive load: 800 W
- packaging: 1 pc, small box





5 s – 8 min | PIR Sensor

8 592920 025109

G1110 | 1/-/-/80
14 54 007 100 | G1110

- detection angle: 180°
- detection distance: 12 m
- switching time: min. 10 seconds – max. 7 minutes
- IP rating: IP44
- sensor type: PIR
- power source: 230 V~/50 Hz
- max. resistive load: 1200 W
- packaging: 1 pc, small box





10 s – 7 min | PIR Sensor

8 592920 032817

G1120 | 1/-/-/40
14 54 007 200 | G1120

- detection angle: 180°
- detection distance: 12 m
- switching time: min. 10 seconds – max. 7 minutes
- IP rating: IP44
- sensor type: PIR
- power source: 230 V~/50 Hz
- max. resistive load: 1200 W
- packaging: 1 pc, small box





10 s – 7 min | PIR Sensor

8 592920 032831

G1125 | 1/-/-/40
14 54 007 250 | G1125

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- detection angle: 360°
- detection distance: 6 m
- switching time: min. 10 seconds – max. 7 minutes
- IP rating: IP20
- sensor type: PIR
- power source: 230 V~/50 Hz
- max. resistive load: 1200 W
- packaging: 1 pc, small box





10 s – 7 min | PIR Sensor

8 592920 025123

G1130 | 1/-/-/20

14 54 008 100 | G1130

- detection angle: 360°
- detection distance: 6 m
- switching time: min. 10 sekunds – max. 15 minutes
- IP rating: IP20
- sensor type: PIR
- power source: 230 V~/50 Hz
- max. resistive load: 2 000 W
- packaging: 1 pc, small box





10 s – 15 min | PIR Sensor

8 592920 025147

G1150 | 1/-/-/20

14 54 009 200 | G1150

- detection angle: 360°
- detection distance: 6 m
- switching time: min. 10 sekunds – max. 15 minutes
- IP rating: IP20
- sensor type: PIR
- power source: 230 V~/50 Hz
- max. resistive load: 1200 W
- packaging: 1 pc, small box





10 s – 15 min | PIR Sensor

8 592920 025154

G1160 | 1/-/-/36

14 54 010 100 | G1160

- detection angle: 180°
- detection distance: 12 m
- switching time: min. 10 sekunds – max. 15 minutes
- IP rating: IP65
- sensor type: PIR
- power source: 230 V~/50 Hz
- max. resistive load: 1200 W
- packaging: 1 pc, small box





10 s – 15 min | PIR Sensor

8 592920 085882

G1240 | 1/-/-/40

14 54 015 100 | G1240

- detection angle: 360°
- detection distance: 8 m
- switching time: min. 10 seconds – max. 12 minutes
- IP rating: IP20
- sensor type: microwave
- power source: 230 V~/50 Hz
- max. resistive load: 1200 W
- packaging: 1 pc, small box





10 s – 12 min | MW Sensor

8 592920 025178

G1180 | 1/-/-/24

14 54 012 100 | G1180

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- detection angle: 360°
- detection distance: 8 m
- switching time: min. 10 seconds – max. 12 minutes
- IP rating: IP20
- sensor type: microwave
- power source: 230 V~/50 Hz
- max. resistive load: 1200 W
- packaging: 1 pc, small box



10 s – 12 min | MW Sensor

8 592920 025185

G1190 | 1/-/-/24

14 54 013 100 | G1190

- detection angle: 360°
- detection distance: 15 m
- switching time: min. 10 seconds – max. 12 minutes
- IP rating: IP20
- sensor type: microwave
- power source: 230 V~/50 Hz
- max. resistive load: 1200 W
- packaging: 1 pc, small box



10 s – 12 min | MW Sensor

8 592920 025192

G1210 | 1/-/-/80

14 54 014 100 | G1210

Decorations

Smart chains

Chains GoSmart

EMOS GoSmart

- 64 lighting modes for a festive atmosphere
- Timer function for scheduled on/off
- Music synchronization for rhythmic blinking
- Various lengths 8–24 m, suitable for both indoor and outdoor use
- Connection to the home network via Wi-Fi protocol
- Compatibility with EMOS GoSmart products and TUYA devices
- Voice control with Google Assistant and Amazon Alexa

Powered by tuya

Works with Amazon Alexa Google Assistant

Download on the App Store | GET IT ON Google Play

- product: chain
- light color: RGB
- dimensions: 8 m
- area of use: both outdoor and indoor
- timer
- remote control: no
- number of LED: 80
- supply line length: 5 m
- power: 8.4 W

- IP rating: IP44
- lifetime: 10 000 hours
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife,
- protocol: Wi-Fi
- transmission frequency: 2,4 GHz Wi-Fi
- control by voice assistants
- notifications to the mobile app
- aplication languages: EN, CZ, SK, PL, DE, HU, SI, FR,



Wi Fi | IP44 | Change | 10 000 h | RGB | 64 multifunctional modes

8 592920 121702

D4ZR01 | 1/-/-/30

15 50 044 028 | D4ZR01

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- product: chain
- light color: RGB
- dimensions: 12 m
- area of use: both outdoor and indoor
- timer
- remote control: no
- number of LED: 120
- supply line length: 5 m
- power: 8.4 W

- IP rating: IP44
- lifetime: 10 000 hours
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife,
- protocol: Wi-Fi
- transmission frequency: 2,4 GHz Wi-Fi
- control by voice assistants
- notifications to the mobile app
- aplication languages: EN, CZ, SK, PL, DE, HU, SI, FR,





WiFi | IP44 | Change | 10 000 h | RGB | 64 multifunctional modes

8 592920 121726

D4ZR02 | 1/-/-/25

15 50 044 029 | D4ZR02

- product: chain
- light color: RGB
- dimensions: 18 m
- area of use: both outdoor and indoor
- timer
- remote control: no
- number of LED: 180
- supply line length: 5 m
- power: 8.4 W

- IP rating: IP44
- lifetime: 10 000 hours
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife,
- protocol: Wi-Fi
- transmission frequency: 2,4 GHz Wi-Fi
- control by voice assistants
- notifications to the mobile app
- aplication languages: EN, CZ, SK, PL, DE, HU, SI, FR,





WiFi | IP44 | Change | 10 000 h | RGB | 64 multifunctional modes


8 592920 121740

D4ZR03 | 1/-/-/20

15 50 044 030 | D4ZR03

- product: chain
- light color: RGB
- dimensions: 24 m
- area of use: both outdoor and indoor
- timer
- remote control: no
- number of LED: 240
- supply line length: 5 m
- power: 8.4 W

- IP rating: IP44
- lifetime: 10 000 hours
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife,
- protocol: Wi-Fi
- transmission frequency: 2,4 GHz Wi-Fi
- control by voice assistants
- notifications to the mobile app
- aplication languages: EN, CZ, SK, PL, DE, HU, SI, FR,





WiFi | IP44 | Change | 10 000 h | RGB | 64 multifunctional modes

8 592920 121764

D4ZR04 | 1/-/-/16

15 50 044 031 | D4ZR04

Decorations

Decorations

Party

DCPW01 1/-/-/6

15 50 000 000 ZY1939

8 592920 093207 | 230 V AC/ 24 V DC | IP44



- product: garland
- light color: warm white
- dimensions: 5 m
- area of use: both outdoor and indoor
- timer: no
- remote control: no
- number of LED: 50
- supply line length: 5 m
- power: 5 W
- IP rating: IP44
- lifetime: 10 000 hours

DCPW02 1/-/-/6

15 50 000 001 ZY2053

8 592920 093214 | 230 V AC/ 24 V DC | IP44



- product: garland
- light color: warm white
- dimensions: 5 m
- area of use: both outdoor and indoor
- timer: no
- remote control: no
- number of LED: 50
- supply line length: 5 m
- power: 6 W
- IP rating: IP44
- lifetime: 10 000 hours

DCPV01 1/-/-/8

15 50 001 023 DCPV01

8 592920 099070 | 230 V AC/ 5 V DC | IP44



- product: garland
- light color: vintage
- dimensions: 4.5 m
- area of use: both outdoor and indoor
- timer: no
- remote control: no
- number of LED: 100
- supply line length: 5 m
- power: 5 W
- IP rating: IP44
- lifetime: 10 000 hours

DCPM01 1/-/-/6

15 50 004 000 ZY1938

8 592920 094013 | 230 V AC/ 24 V DC | IP44



- product: garland
- light color: multicolor
- dimensions: 5 m
- area of use: both outdoor and indoor
- timer: no
- remote control: no
- number of LED: 50
- supply line length: 5 m
- power: 6 W
- IP rating: IP44
- lifetime: 10 000 hours

DCPZ01 1/-/-/2

15 50 005 000 ZY2293

8 592920 094020 | 230 V AC | E27



- dimensions: 7.35 m
- area of use: both outdoor and indoor
- timer: no
- remote control: no
- supply line length: 5 m
- power: 750 W max.
- IP rating: IP44
- lifetime: 10 000 hours

DCPZ02 1/-/-/2

15 50 005 001 ZY2294

8 592920 094037 | 230 V AC | E27



- dimensions: 7.35 m
- area of use: both outdoor and indoor
- timer: no
- remote control: no
- power: 750 W max.
- IP rating: IP44
- lifetime: 10 000 hours

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

DCPW04 1/-/-/6

15 50 005 016 DCPW04

8 592920 099551

230 V AC/ 30 V DC

IP44



- product: garland
- light color: warm white
- dimensions: 7.6 m
- area of use: both outdoor and indoor
- timer: no
- remote control: no
- number of LED: 16
- supply line length: 5 m
- power: 6 W
- IP rating: IP44
- lifetime: 10 000 hours

DCPW07 1/-/-/6

15 50 005 019 DCPW07

8 592920 110829

230 V AC/ 30 V DC

IP44



- product: garland
- light color: warm white
- dimensions: 7.6 m
- area of use: both outdoor and indoor
- timer: no
- remote control: no
- number of LED: 20
- supply line length: 5 m
- power: 6 W
- IP rating: IP44
- lifetime: 10 000 hours

Lantern

DCLV01 1/-/-/15

15 50 001 013 ZY2114

8 592920 093771

3× AAA

Indoor



- product: lantern
- light color: vintage
- dimensions: 10.5 × 24 cm
- area of use: indoor
- timer
- remote control: no
- number of LED: 1
- power: 0.06 W
- IP rating: IP20
- lifetime: 10 000 hours

DCLV02 1/-/-/15

15 50 001 014 ZY2115

8 592920 093788

3× AAA

Indoor



- product: lantern
- light color: vintage
- dimensions: 10.5 × 24 cm
- area of use: indoor
- timer
- remote control: no
- number of LED: 1
- power: 0.06 W
- IP rating: IP20
- lifetime: 10 000 hours

LED candles

DCCV06 1/-/-/8

15 50 001 005 ZY2141

8 592920 093696

3× 3 AAA

Indoor



- product: candle
- light color: vintage
- dimensions: 7.5 × 10/12.5/15 cm
- area of use: indoor
- timer
- remote control: yes (1× CR2032, include
- number of LED: 3× 1
- power: 0.06 W
- IP rating: IP20
- lifetime: 10 000 hours

DCCV07 1/-/-/8

15 50 001 006 ZY2143

8 592920 093702

3× 3 AAA

Indoor



- product: candle
- light color: vintage
- dimensions: 7.5 × 10/12.5/15 cm
- area of use: indoor
- timer
- remote control: yes (1× CR2032, include
- number of LED: 3× 1
- power: 0.06 W
- IP rating: IP20
- lifetime: 10 000 hours

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

DCCV11 6/-/-/216

15 50 001 010 ZY2149



8 592920 093740 | 6× CR2032 | Indoor

- product: candle
- light color: vintage
- dimensions: 3.8 × 3.8 cm
- area of use: indoor
- timer: no
- remote control: no
- number of LED: 6× 1
- power: 0.06 W
- IP rating: IP20
- lifetime: 10 000 hours

DCCV12 6/-/-/216

15 50 001 011 ZY2150



8 592920 093757 | 6× CR2032 | Indoor

- product: candle
- light color: vintage
- dimensions: 3.8 × 3.8 cm
- area of use: indoor
- timer: no
- remote control: no
- number of LED: 6× 1
- power: 0.06 W
- IP rating: IP20
- lifetime: 10 000 hours

DCCV13 6/-/-/216

15 50 001 012 ZY2151



8 592920 093764 | 6× CR2032 | Indoor

- product: candle
- light color: vintage
- dimensions: 3.8 × 3.8 cm
- area of use: indoor
- timer: no
- remote control: no
- number of LED: 6× 1
- power: 0.06 W
- IP rating: IP20
- lifetime: 10 000 hours

DCCV19 1/-/-/35

15 50 000 056 ZY2371T



8 592920 098295 | 2× C | IP44

- product: grave candle
- light color: warm white
- dimensions: 7 × 12.5 cm
- area of use: both outdoor and indoor
- timer
- remote control: no
- number of LED: 1
- power: 0.06 W
- IP rating: IP44
- lifetime: 10 000 hours

DCCV20 1/-/-/35

15 50 000 057 ZY2372



8 592920 098318 | 2× C | IP44

- product: grave candle
- light color: warm white
- dimensions: 7 × 12.5 cm
- area of use: both outdoor and indoor
- timer: sensor
- remote control: no
- number of LED: 1
- power: 0.06 W
- IP rating: IP44
- lifetime: 10 000 hours

DCCV21 1/-/-/24

15 50 001 024 DCCV21



8 592920 099094 | 2× C | Outdoor

- product: grave candle
- light color: vintage
- dimensions: 7 × 12.5 cm
- area of use: both outdoor and indoor
- timer
- remote control: no
- number of LED: 1
- power: 0.06 W
- IP rating: IP44
- lifetime: 10 000 hours

DCCV22 1/-/-/24

15 50 001 029 DCCV22



8 592920 111383 | 2× AA

- product: grave candle
- light color: vintage
- dimensions: 7.5 × 25 cm
- area of use: both outdoor and indoor
- timer: no
- remote control: no
- number of LED: 1
- power: 0.06 W
- IP rating: IP44
- lifetime: 1 500 hours

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

Weather stations, thermometers, scales, others



Weather stations

Weather stations

- can assess current weather and forecast
- display temperature and humidity (in and out), time and date
- wireless comm. with up to 3 sensors (powered by AA or AAA)
- large colour display, LED backlight (perm/temp) & projector
- with stand/for hanging on the wall, battery or mains powered

clock: DCF (radio controlled clock) ▪ LED backlight display ▪ the possibility of hanging on the wall ▪ time zones ▪ date ▪ calendar ▪ alarm clock: yes, 2× ▪ outdoor temperature: -30 °C to +60 °C, resolutions 0.1 °C ▪ indoor temperature: -10 °C to +50 °C, resolution 0.1 °C ▪ outdoor humidity: 1 % až 99 % RV, resolution 1 % ▪ indoor humidity: 1 % to 99 % RH, resolution 1 % ▪ min. and max. temperature ▪ weather forecast ▪ temperature warning ▪ pressure trend ▪ barometer ▪ rain gauge ▪ anemometer ▪ altitude adjustment ▪ moon phase ▪ range of the sensor: up to 100 m ▪ possible additional sensor: up to 3 temperature and humidity sensors (E06018), 1 anenometer sensor (E06016) ▪ power of sensor: 4× 1.5 V AA (not included) ▪ power of station: 3× 1.5 V AAA (not included) ▪ AC adapter: yes, 5 V DC/300 mA (included) ▪ main unit size: 17 × 192 ×





Comfort view | DCF | °C IN/OUT | % IN/OUT | hPa | 4× AA | 3× AAA | 5 V DC/ 300 mA

8 592920 081235

E6016	1/-/-/1
26 06 164 000	E6016

clock: DCF (radio controlled clock) ▪ color backlight display (Black Mask) ▪ date ▪ calendar ▪ alarm clock: yes, 2× ▪ outdoor temperature: -20 °C to +60 °C, resolution 0.1 °C ▪ indoor temperature: -5 °C to +50 °C, resolution 0.1 °C ▪ min. and max. temperature ▪ weather forecast ▪ rain gauge: no ▪ anemometer: no ▪ range of the sensor: up to 30 m ▪ possible additional sensor: 3 (E08400) ▪ power of sensor: 2× 1.5 V AA (not included) ▪ power of station: 1× CR2032 (included) ▪ AC adapter: yes, 4.5 V DC/300 mA (included) ▪ main unit size: 56 × 163 × 80 mm





Comfort view | DCF | °C IN/OUT | 4.5 V DC/ 300 mA | 1× CR2032 | 2× AA | RGB Display

8 592920 033098

E8466	1/-/-/8
26 06 150 000	E8466

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

clock: DCF (radio controlled clock) ▪ LED backlight display ▪ the possibility of hanging on the wall ▪ color backlight display (Black Mask) ▪ time zones ▪ date ▪ calendar ▪ alarm clock: yes, 2× ▪ outdoor temperature: -40 °C to +70 °C, resolution 0.1 °C ▪ indoor temperature: -10 °C to +50 °C, resolution 0.1 °C ▪ outdoor humidity: 20 % to 95 % RH, resolution 1 % ▪ indoor humidity: 1 % to 99 % RH, resolution 1 % ▪ min. and max. temperature ▪ weather forecast ▪ pressure trend ▪ barometer ▪ rain gauge: no ▪ anemometer: no ▪ moon phase ▪ range of the sensor: up to 50 m ▪ possible additional sensor: 3 (E05018) ▪ wired probe for sensor: 0.95 m ▪ power of sensor: 2× 1.5 V AAA (not included) ▪ power of station: 3× 1.5 V AAA (not included) ▪ AC adapter: yes, 5 V DC/600 mA (included) ▪ main unit size: 26 × 197 × 125 mm



Comfort view | DCF | °C IN/OUT | % IN/OUT | hPa | 5 V DC/ 600 mA | 3× AAA | 2× AAA

8 592920 104101

E5111 1/-/-/8

26 06 170 000 E5111

---

clock: DCF (radio controlled clock) ▪ LED backlight display ▪ the possibility of hanging on the wall ▪ color backlight display (Black Mask) ▪ time zones ▪ date ▪ calendar ▪ alarm clock: yes, 2× ▪ outdoor temperature: -50 °C to +70 °C, resolution 0.1 °C ▪ indoor temperature: -10 °C to +50 °C, resolution 0.1 °C ▪ outdoor humidity: 1 % až 99 % RV, resolution 1 % ▪ indoor humidity: 1 % to 99 % RH, resolution 1 % ▪ min. and max. temperature ▪ weather forecast ▪ temperature warning ▪ pressure trend ▪ barometer ▪ rain gauge: no ▪ anemometer: no ▪ altitude adjustment ▪ moon phase ▪ range of the sensor: up to 100 m ▪ possible additional sensor: 3 (E06018) ▪ power of sensor: 2× 1.5 V AAA (not included) ▪ power of station: 3× 1.5 V AAA (not included) ▪ AC adapter: yes, 5 V DC/300 mA (included) ▪ main unit size: 17 × 192 × 127 mm



Comfort view | DCF | °C IN/OUT | % IN/OUT | hPa | 5 V DC/ 300 mA | 3× AAA | 2× AAA

8 592920 081211

E6018 1/-/-/12

26 06 162 000 E6018

---

clock: DCF (radio controlled clock) ▪ LED backlight display ▪ the possibility of hanging on the wall ▪ time zones ▪ date ▪ calendar ▪ alarm clock: yes, 2× ▪ outdoor temperature: -40 °C to +70 °C, resolution 0.1 °C ▪ indoor temperature: -10 °C to +50 °C, resolution 0.1 °C ▪ outdoor humidity: 20 % to 95 % RH, resolution 1 % ▪ indoor humidity: 1 % to 99 % RH, resolution 1 % ▪ min. and max. temperature ▪ weather forecast ▪ pressure trend ▪ barometer ▪ rain gauge: no ▪ anemometer: no ▪ altitude adjustment ▪ range of the sensor: up to 30 m ▪ possible additional sensor: 3 (E05018) ▪ wired probe for sensor ▪ power of sensor: 2× 1.5 V AAA (not included) ▪ power of station: 3× 1.5 V AA (not included) ▪ main unit size: 27 × 130 × 130 mm



Comfort view | DCF | °C IN/OUT | % IN/OUT | hPa | 3× AA | 2× AAA

8 592920 104125

E5080 1/-/-/12

26 06 169 000 E5080

---

clock: DCF (radio controlled clock) ▪ LED backlight display ▪ time zones ▪ date ▪ calendar ▪ alarm clock ▪ outdoor temperature: -50 °C to +70 °C, resolution 0.1 °C ▪ indoor temperature: -10 °C to +50 °C, resolution 0.1 °C ▪ outdoor humidity: 20 % to 95 %, resolution 1 % ▪ indoor humidity: 20 % to 95 %, resolution 1 % ▪ min. and max. temperature ▪ weather forecast ▪ temperature warning ▪ rain gauge: no ▪ anemometer: no ▪ moon phase ▪ range of the sensor: up to 30 m ▪ possible additional sensor: 3 (E05018) ▪ power of sensor: 2× 1.5 V AAA (not included) ▪ power of station: 2× 1.5 V AA (not included) ▪ main unit size: 50 × 120 × 180 mm



DCF | °C IN/OUT | % IN/OUT | 2× AAA | 2× AA

8 592920 044612

E3003 1/-/-/10

26 06 153 000 E3003

---

clock: DCF (radio controlled clock) ▪ LED backlight display ▪ time zones ▪ date ▪ calendar ▪ alarm clock ▪ outdoor temperature: -30 °C to +60 °C, resolutions 0.1 °C ▪ indoor temperature: 0 °C to +50 °C, resolution 0.1 °C ▪ indoor humidity: 20 % to 90 % RH, resolution 1 % ▪ weather forecast ▪ rain gauge: no ▪ anemometer: no ▪ moon phase ▪ range of the sensor: up to 30 m ▪ possible additional sensor: 3 (E03070) ▪ power of sensor: 2× 1.5 V AAA (not included) ▪ power of station: 3× 1.5 V AAA (not included) ▪ main unit size: 52 × 139 × 100 mm



DCF | °C IN/OUT | % IN | 3× AAA | 2× AAA

8 592920 010785

E3070 1/-/-/18

26 06 139 000 E3070

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

clock: DCF (radio controlled clock) ▪ the possibility of hanging on the wall ▪ time zones ▪ date ▪ calendar ▪ alarm clock ▪ outdoor temperature: -40 °C to +60 °C, resolution 0.1 °C ▪ indoor temperature: -10 °C to +50 °C, resolution 0.1 °C ▪ outdoor humidity: 20 % to 95 % RH, resolution 1 % ▪ indoor humidity: 1 % to 99 % RH, resolution 1 % ▪ min. and max. temperature ▪ weather forecast ▪ rain gauge: no ▪ anemometer: no ▪ moon phase ▪ range of the sensor: up to 30 m ▪ possible additional sensor: 3 (E05018) ▪ power of sensor: 2× 1.5 V AA (not included) ▪ power of station: 2× 1.5 V AAA (not included) ▪ main unit size: 23 × 76 × 126 mm





DCF | °C IN/OUT | % IN/OUT | 2× AA | 2× AAA

8 592920 090039

E0352 | 1/-/-/20

26 06 166 000 | E0352

---

clock: yes, quartz ▪ date ▪ calendar ▪ alarm clock ▪ outdoor temperature: -50 °C to +70 °C, resolution 0.1 °C ▪ indoor temperature: -10 °C to +50 °C, resolution 0.1 °C ▪ indoor humidity: 20 % to 95 % RH, resolution 1 % ▪ min. and max. temperature ▪ weather forecast ▪ rain gauge: no ▪ anemometer: no ▪ moon phase ▪ wired probe for sensor: 1.9 m ▪ power of station: 2× LR1130 (included) ▪ main unit size: 16 × 70 × 109 mm





°C IN/OUT | % IN | 2× LR1130

8 592920 091364

E0117N | 1/-/-/80

26 06 003 000 | E0117N

---

clock: yes, quartz ▪ LED backlight display ▪ the possibility of hanging on the wall ▪ color backlight display (Black Mask) ▪ alarm clock ▪ outdoor temperature: -50 °C to +70 °C, resolution 0.1 °C ▪ indoor temperature: -10 °C to +50 °C, resolution 0.1 °C ▪ outdoor humidity: 20 % to 95 % RH, resolution 1 % ▪ indoor humidity: 20 % to 95 % RH, resolution 1 % ▪ min. and max. temperature ▪ weather forecast ▪ rain gauge: no ▪ anemometer: no ▪ range of the sensor: up to 50 m ▪ power of sensor: 2× 1.5 V AAA (not included) ▪ power of station: 2× 1.5 V AAA (not included) ▪ AC adapter: yes, micro USB 5 V/1 A (not included) ▪ main unit size: 20 × 85 × 96 mm





Comfort view | °C IN/OUT | % IN/OUT | 2× AAA | 2× AAA

8 592920 113622

E8647 | 1/-/-/20

26 06 172 000 | E8647

---

clock: DCF (radio controlled clock) ▪ LED backlight display ▪ the possibility of hanging on the wall ▪ color backlight display (Black Mask) ▪ time zones ▪ date ▪ calendar ▪ alarm clock ▪ outdoor temperature: -30 °C to +60 °C, resolutions 0.1 °C ▪ indoor temperature: -10 °C to +50 °C, resolution 0.1 °C ▪ outdoor humidity: 10 % to 99 % RH, resolution 1 % ▪ indoor humidity: 10 % to 99 % RH, resolution 1 % ▪ min. and max. temperature ▪ weather forecast ▪ temperature warning ▪ barometer ▪ rain gauge ▪ anemometer: no ▪ range of the sensor: up to 50 m ▪ power of sensor: 2× 1.5 V AA (not included) ▪ power of station: 3× 1.5 V AAA (not included) ▪ AC adapter: yes, 5 V DC/1 000 mA (included) ▪ main unit size: 29 × 205 × 127 mnm





Comfort view | DCF | °C IN/OUT | % IN/OUT | hPa | 5 V DC/ 1 000 mA | 3× AAA | 2× AA

8 592920 113608

E8670 | 1/-/-/6

26 06 174 000 | E8670

---

clock: DCF (radio controlled clock) ▪ LED backlight display ▪ the possibility of hanging on the wall ▪ color backlight display (Black Mask) ▪ time zones ▪ date ▪ calendar ▪ alarm clock ▪ outdoor temperature: -40 °C to +60 °C, resolution 0.1 °C ▪ indoor temperature: -10 °C to +50 °C, resolution 0.1 °C ▪ outdoor humidity: 1 % až 99 % RV, resolution 1 % ▪ indoor humidity: 1 % to 99 % RH, resolution 1 % ▪ min. and max. temperature ▪ weather forecast ▪ temperature warning ▪ pressure trend ▪ barometer ▪ rain gauge: no ▪ anemometer: no ▪ moon phase ▪ range of the sensor: up to 80 m ▪ possible additional sensor: 3 (E00387) ▪ power of sensor: 2× 1.5 V AA (not included) ▪ power of station: 3× 1.5 V AA (not included) ▪ AC adapter: yes, 5 V DC/1 200 mA (included) ▪ main unit size: 30 × 200 × 130 mm





Comfort view | DCF | °C IN/OUT | % IN/OUT | hPa | 5 V DC/ 1 200 mA | 3× AA | 2× AA

8 592920 113554

E0387 | 1/-/-/8

26 06 176 000 | E0387

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

clock: DCF (radio controlled clock) ▪ LED backlight display ▪ color backlight display (Black Mask) ▪ time zones ▪ date ▪ calendar ▪ alarm clock ▪ outdoor temperature: -50 °C to +70 °C, resolution 0.1 °C ▪ indoor temperature: -2 °C to +50 °C, resolution 0.1 °C ▪ outdoor humidity: 20 % to 95 % RH, resolution 1 % ▪ indoor humidity: 20 % to 95 % RH, resolution 1 % ▪ min. and max. temperature ▪ weather forecast ▪ temperature warning ▪ pressure trend ▪ barometer ▪ rain gauge: no ▪ anemometer: no ▪ moon phase ▪ range of the sensor: up to 100 m ▪ possible additional sensor: 3 (E00387, E05018) ▪ power of sensor: 2× 1.5 V AAA (not included) ▪ power of station: 2× 1.5 V AA (not included) ▪ AC adapter: yes, USB-C 9 V DC/2 000 mA, 1.5 m (included) ▪ main unit size: 133 × 125 × 110 mm





Comfort view | DCF | °C IN/OUT | % IN/OUT | hPa | 2× AA | 2× AAA | 9 V DC/ 2 000 mA | Qi wireless charging

8 592920 123249

E8010 | 1/-/-/6

26 06 179 000 | E8010

Thermometers

Thermometers

- displays indoor & outdoor temperature, some also humidity
- wireless or with probe (wire-connected, out the window)
- measures indoor humidity via integrated sensor in the body
- selected models also feature calendar, alarm and ice warning
- hung on wall or window, thermometer & probe battery-powered

thermometer design: wireless ▪ clock: DCF (radio controlled clock) ▪ LED backlight display ▪ time zones ▪ indoor temperature: -9 °C to +50 °C, resolution 0.1 °C ▪ outdoor temperature: -50 °C to +70 °C, resolution 0.1 °C ▪ min. and max. temperature ▪ range in open space: up to 60 m ▪ possible additional sensor: 1 (E05018) ▪ the possibility of hanging on the wall ▪ power of station: 2× 1.5 V AAA (not included) ▪ power of sensor: 2× 1.5 V AAA (not included) ▪ main unit size: 25 × 82 × 152 mm ▪ sensor size: 27 × 60 × 95 mm ▪ screen size: 54 × 74 mm





DCF | Max/Min | °C IN/OUT | 2× AAA | 2× AAA

8 595025 397348

E0107 | 1/-/-/24

26 03 115 000 | E0107T

thermometer design: wireless ▪ indoor temperature: -10 °C to +50 °C, resolution 0.1 °C ▪ outdoor temperature: -30 °C to +50 °C, resolutions 0,1 °C ▪ min. and max. temperature ▪ range in open space: up to 80 m ▪ possible additional sensor: 1 (E05018) ▪ the possibility of hanging on the wall ▪ power of station: 2× 1.5 V AAA (not included) ▪ power of sensor: 2× 1.5 V AAA (not included) ▪ main unit size: 91,8 × 20 × 91,8 mm ▪ sensor size: 31 × 19 × 100 mm ▪ screen size: Ø 64 mm





°C IN/OUT | 2× AAA | 2× AAA

8 592920 080733

E0129 | 1/-/-/20

26 03 119 002 | E0129

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

thermometer design: wireless ▪ indoor temperature: 0 °C to +60 °C, resolution 0.1 °C ▪ outdoor temperature: -40 °C to +60 °C, resolution 0.1 °C ▪ range in open space: up to 100 m ▪ the possibility of hanging on the wall ▪ power of station: 2× 1.5 V AAA (not included) ▪ power of sensor: 2× 1.5 V AAA (not included) ▪ main unit size: 18 × 56 × 85 mm ▪ sensor size: 20 × 49 × 68 mm ▪ screen size: 34 × 39 mm





°C IN/OUT | 2× AAA | 2× AAA

8 592920 010761

E0042 1/-/-/30

26 03 118 000 E0042

---

thermometer design: wireless ▪ clock: DCF (radio controlled clock) ▪ LED backlight display ▪ time zones ▪ date ▪ alarm clock ▪ snooze ▪ indoor temperature: 0 °C to +50 °C, resolution 0.1 °C ▪ outdoor temperature: -20 °C to +60 °C, resolutions 0.1 °C ▪ min. and max. temperature ▪ range in open space: up to 30 m ▪ possible additional sensor: 1 (E05018) ▪ power of station: 2× 1.5 V AAA (not included) ▪ power of sensor: 2× 1.5 V AAA (not included) ▪ main unit size: 30 × 78 × 78 mm ▪ sensor size: 25 × 60 × 95 mm ▪ screen size: 46 × 49 mm





DCF | Max/Min | °C IN/OUT | 2× AAA | 2× AAA

8 592920 044643

E0127 1/-/-/18

26 03 121 000 E0127

---

thermometer design: wire ▪ indoor temperature: -10 °C to +50 °C, resolution 1 °C ▪ indoor humidity: 20 % to 99 % RH, resolution 1 % ▪ outdoor temperature: -50 °C to +70 °C, resolution 1 °C ▪ min. and max. temperature ▪ temperature warning ▪ temperature index ▪ wired probe for sensor: 2 m ▪ the possibility of hanging on the wall ▪ power of station: 2× 1.5 V AAA (not included) ▪ main unit size: 22 × 106 × 117 mm ▪ screen size: 64 × 76 mm





Max/Min | °C IN/OUT | % IN | 2× AAA

8 592920 010983

E8471 1/-/-/40

26 03 014 000 RS8471

---

thermometer design: wire ▪ indoor temperature: 0 °C to +60 °C, resolution 0.1 °C ▪ outdoor temperature: -40 °C to +60 °C, resolution 0.1 °C ▪ wired probe for sensor: 2 m, Ø 8 mm ▪ the possibility of hanging on the wall ▪ power of station: 2× 1.5 V AAA (not included) ▪ main unit size: 18 × 57 × 85 mm ▪ screen size: 34 × 40 mm





°C IN/OUT | 2× AAA

8 592920 010754

E0041 1/-/-/30

26 03 013 000 E0041

---

thermometer design: wireless ▪ clock: yes, quartz ▪ LED backlight display ▪ date ▪ alarm clock ▪ snooze ▪ indoor temperature: 0 °C to +50 °C, resolution 0.1 °C ▪ indoor humidity: 20 % to 90 % RH, resolution 1 % ▪ min. and max. temperature ▪ power of station: 1× 1.5 V AA (not included) ▪ main unit size: 37 × 93 × 93 mm ▪ screen size: 60 × 65 mm





Max/Min | °C IN | % IN | 1× AA 1.5 V

8 592920 010747

E0114 1/5/-/50

26 03 117 000 E0114

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

thermometer design: wire ▪ clock ▪ alarm clock ▪ snooze ▪ indoor temperature: 0 °C to +50 °C, resolution 0.1 °C ▪ indoor humidity: 25 % to 95 % RH, resolution 1 % ▪ outdoor temperature: -40 °C to +60 °C, resolution 0.1 °C ▪ min. and max. temperature ▪ wired probe for sensor: 2,9 m, Ø 4 mm ▪ the possibility of hanging on the wall ▪ power of station: 1× 1.5 V AAA (not included) ▪ main unit size: 23 × 76 × 107 mm ▪ screen size: 46 × 61 mm





Max/Min | °C IN/OUT | % IN | 1× AAA

8 592920 113400

E0121 | 1/-/-/20

26 03 016 001 | E0121

---

thermometer design: wire ▪ indoor temperature: 0 °C to +60 °C, resolution 0.1 °C ▪ outdoor temperature: -40 °C to +60 °C, resolution 0.1 °C ▪ min. and max. temperature ▪ wired probe for sensor: 0.9 m ▪ the possibility of hanging on the wall ▪ power of station: 2× 1.5 V AAA (not included) ▪ main unit size: 19 × 58 × 75 mm ▪ screen size: 41 × 52 mm





Max/Min | °C IN/OUT | 2× AAA

8 592920 113516

E0422 | 1/-/-/30

26 03 016 002 | E0422

---

thermometer design: wireless ▪ clock: yes, quartz ▪ LED backlight display ▪ alarm clock ▪ snooze ▪ indoor temperature: 0 °C to +50 °C, resolution 0.1 °C ▪ outdoor temperature: -30 °C to +60 °C, resolutions 0.1 °C ▪ min. and max. temperature ▪ range in open space: up to 50 m ▪ possible additional sensor: 3 (E05018) ▪ the possibility of hanging on the wall ▪ power of station: 2× 1.5 V AAA (not included) ▪ power of sensor: 2× 1.5 V AAA (not included) ▪ main unit size: 21 × 80 × 110 mm ▪ sensor size: 25 × 50 × 95 mm ▪ screen size: 53 × 81 mm





Max/Min | °C IN/OUT | 2× AAA | 2× AAA

8 592920 113394


E8636 | 1/-/-/32

26 03 119 003 | E8636

---

thermometer design: wireless ▪ magnet for fixing ▪ indoor temperature: -10 °C to +50 °C, resolution 0.1 °C ▪ indoor humidity: 20 % to 90 % RH, resolution 1 % ▪ the possibility of hanging on the wall ▪ power of station: 1× 3 V CR2032 (included) ▪ main unit size: 46 × 16 × 62 mm ▪ screen size: 34 × 41 mm





°C IN | % IN | 1× CR2032 | Magnetic

8 592920 123256

E0345 | 1/-/50/100

26 03 203 000 | ET345TH

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

Thermometers GoSmart

EMOS GoSmart

- For measuring indoor temperature and humidity
- Display temperature and humidity data history in the app
- Temperature and humidity alerts via alarm
- Small size and elegant design
- Battery powered
- Connection to home network via ZigBee protocol
- Compatibility with EMOS GoSmart products and TUYA devices
- Voice control with Google Assistant and Amazon Alexa

Powered by

Works with Amazon Alexa Google Assistant

Download on the App Store

GET IT ON Google Play

---

thermometer design: wireless – smart ▪ indoor temperature: -20 °C to +60 °C, resolution 0.1 °C ▪ indoor humidity: 0 % to 99 % RH, resolution 1 % ▪ temperature warning ▪ the possibility of hanging on the wall ▪ power of station: 1× 3 V CR2032 (included) ▪ main unit size: 26 × 13 × 52 mm





ZigBee 3.0

1× 3 V CR2032 included

8 592920 129357

EGS0102 | 1/-/-/80

26 03 122 000 | EGS0102

---

thermometer design: wireless – smart ▪ clock: wifi ▪ LED backlight display ▪ date ▪ indoor temperature: -10 °C to +60 °C, resolution 0.1 °C ▪ indoor humidity: 0 % to 99 % RH, resolution 1 % ▪ min. and max. temperature ▪ temperature warning ▪ the possibility of hanging on the wall ▪ power of station: 3× 1.5 V AAA (not included) ▪ main unit size: 56 × 23 × 56 mm ▪ screen size: 42 × 40 mm





ZigBee 3.0

°C IN | % IN | Max/Min | Temperature warning | Wifi controlled | Backlit display | 3× AAA

8 592920 129371

EGS0101 | 1/-/-/80

26 03 123 000 | EGS0101

Spare sensors

- wireless sensors and wired probes for EMOS weather stations
- measure outdoor temperature and humidity (-50 to +70 °C)
- range of up to 25–100 m in an open area

---

designed for the type of main unit: AOK-5018B, AOK-5060, S627BS, IB303TR, E0107T, IW001-DCF, IW003-DCF, E5068, E5062, E5063, E3078, E3028, E0300, E8236, E0211, E3010, E0127, E0329, E5005, E3003, E0107, E0129, E5101, E5010, E0352, E5059, E5111, E8636, E0316 ▪ indicator of outdoor humidity: 20 % to 95 % RH, resolution 1 % ▪ range in open space: up to 25 m ▪ external wire sensor ▪ operating temperature: -50 °C to +70 °C, resolution 0.1 °C ▪ power source: 2× 1.5 V AAA (not included) ▪ dimensions: 21 × 60 × 100 mm



°C IN/OUT | % IN/OUT | 25 m | 433.92 MHz | 2× AAA

8 595025 392770

E05018 | 1/-/-/100

26 93 000 120 | AOK2011

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number	Packaging Type

designed for the type of main unit: E3070 ▪ range in open space: up to 30 m ▪ operating temperature: -30 °C to +60 °C, resolution 0.1 °C ▪ power source: 2× 1.5 V AAA (not included) ▪ dimensions: 84 × 64 × 25 mm



°C OUT | 30 m | 433.92 MHz | 2× AAA

8 592920 018170

E03070 | 1/-/-/100
26 93 000 180 | E03070

---

designed for the type of main unit: C8403D, C8404C, C8405D, E8468, E8466 ▪ indicator of outdoor humidity: 20 % to 90 % RH, resolution 1 % ▪ range in open space: up to 50 m ▪ operating temperature: -40 °C to +70 °C, resolution 0.1 °C ▪ power source: 2× 1.5 V AA (not included) ▪ dimensions: 64 × 100 × 35 mm



°C OUT | % OUT | 50 m | 433.92 MHz | 2× AA

8 592920 000687

E08400 | 1/-/-/50
26 93 000 160 | C8340C

---

designed for the type of main unit: E6018, E6016 ▪ indicator of outdoor humidity: 1 % to 99 % RH, resolution 1 % ▪ range in open space: up to 100 m ▪ operating temperature: -50 °C to +70 °C, resolution 0.1 °C ▪ power source: 2× 1.5 V AAA (not included) ▪ dimensions: 15 × 62 × 100 mm



°C OUT | % OUT | 100 m | 433.92 MHz | 2× AAA

8 592920 081402

E06018 | 1/-/-/100
26 93 000 220 | E06018

---

designed for the type of main unit: E6016 ▪ indicator of outdoor humidity: 1 % to 99 % RH, resolution 1 % ▪ range in open space: up to 100 m ▪ operating temperature: -30 °C to +60 °C, resolution 0.1 °C ▪ power source: 4× 1.5 V AA (not included) ▪ dimensions: 275 × 135 × 310 mm



°C OUT | % OUT | 100 m | 433.92 MHz | 4× AA 1.5 V

8 592920 090381

E06016 | 1/-/-/1
26 93 000 230 | E06016

---

designed for the type of main unit: E0387 ▪ indicator of outdoor humidity: 1 % to 99 % RH, resolution 1 % ▪ range in open space: up to 80 m ▪ operating temperature: -40 °C to +60 °C, resolution 0.1 °C ▪ power source: 2× 1.5 V AA (not included) ▪ dimensions: 20 × 38 × 100 mm



°C OUT | % OUT | 80 m | 433.92 MHz | 2× AA

8 592920 122259

E00387 | 1/-/-/100
26 93 000 240 | E00387

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

Kitchen, hanging scales

- digital kitchen scales with load capacity of up to 5–15 kg
- ability to switch between units (g, kg, ml, lb, oz)
- with and without backlit screen
- powered by AAA or button batteries (CR2032)
- battery-free scales – turning wheel charges up for 2 minutes
- ABS plastic, toughened glass or stainless surface
- with tare and overload function
- digital hanging scales, 50 kg capacity (for fish or luggage)

- scale surface: tempered glass
- tare function
- maximum load: 5 kg
- weight units: g, oz, lb, kg
- power source: 1× 3 V CR2032 (included)
- dimensions: 15 × 152 × 219 mm





Tare function | Accuracy 1 g | 1× 3 V CR2032 included | 5 kg max.

8 592920 006900

EV014 26 17 001 400

1/-/-/20 TY3101

- scale surface: tempered glass
- tare function
- maximum load: 5 kg
- weight units: g, oz, lb, kg
- power source: 1× 3 V CR2032 (included)
- dimensions: 15 × 152 × 219 mm





Tare function | Accuracy 1 g | 1× 3 V CR2032 included | 5 kg max.

8 592920 006917

EV014B 26 17 001 401

1/-/-/20 TY3101B

- backlight display
- scale surface: ABS plastic
- tare function
- maximum load: 5 kg
- weight units: g, oz, lb, kg, ml
- power source: 2× 1.5 V AAA (not included)
- dimensions: 20 × 198 × 223 mm





Tare function | Accuracy 1 g | 2× AAA | 1.4 l Bowl | 5 kg max.

8 592920 067109

EV025 26 17 002 500

1/-/-/6 EV025

- backlight display
- scale surface: ABS plastic
- tare function
- maximum load: 5 kg
- weight units: g, kg, lb, oz
- power source: 2× 1.5 V AAA (not included)
- dimensions: 49 × 150 × 218 mm





Tare function | Accuracy 1 g | 2× AAA | 1.25 l Bowl | 5 kg max.

8 592920 009499

EV016 26 17 001 600

1/-/-/6 GP-KS021

EMOS
A brand of legrand

www.emos.eu

Order Code / Item Number | Packaging / Type

- backlight display
- scale surface: tempered glass
- tare function
- maximum load: 15 kg
- weight units: g, kg, lb, oz
- power source: 2× 1.5 V AAA (included)
- dimensions: 22 × 180 × 210 mm





Tare function | Accuracy 1 g | 2× 1.5 V AAA included | 15 kg max.

8 592920 044667

EV022 | 1/-/-/12

26 17 002 200 | EV022

- backlight display
- scale surface: stainless steel
- tare function
- maximum load: 5 kg
- weight units: g, oz, lb, kg
- power source: 2× 3 V CR2032 (included)
- dimensions: 15 × 163 × 221 mm





Tare function | Accuracy 1 g | 1× 3 V CR2032 included | 5 kg max.

8 595025 393982

EV012 | 1/-/-/12

26 17 001 200 | PT-836

- backlight display
- scale surface: stainless steel
- tare function
- maximum load: 15 kg
- weight units: g, kg, lb, oz
- power source: 2× 1.5 V AAA (not included)
- dimensions: 15 × 176 × 216 mm





Tare function | Accuracy 1 g | 2× AAA | 15 kg max.

8 592920 052693

EV023 | 1/-/-/20

26 17 002 300 | EV023

- backlight display
- scale surface: stainless steel
- tare function
- maximum load: 10 kg
- weight units: g, kg, ml, oz, lb, tl
- power source: 2× 1.5 V AAA (included)
- dimensions: 15 × 153 × 212 mm





Accuracy 1 g | Accuracy 1 g | 2× 1.5 V AAA included | 10 kg max.

8 592920 103340

EV026 | 1/-/-/20

26 17 000 500 | EV026

- scale surface: ABS plastic + aluminium (Al)
- tare function
- maximum load: 50 kg
- weight units: kg, lb
- power source: 1× 3 V CR2032 (included)
- dimensions: 31 × 40 × 148 mm





Tare function | Accuracy 1 g | 1× 3 V CR2032 included | Portable | 50 kg max.

8 595025 394026

EV020 | 1/-/-/40

26 17 002 000 | EV020

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- backlight display
- scale surface: ABS plastic + stainless steel
- tare function
- maximum load: 3 kg
- weight units: g, lb, oz
- power source: 3× 1.5 V AAA (included)
- dimensions: 154 × 28 × 190 mm





Tare function | Accuracy 0.1 g | 3× 1.5 V AAA included | 3 kg max. | Coffee preparation | Timer

8 592920 123232

EV029 1/-/-/10

26 17 002 600 EV029

- scale surface: ABS plastic
- tare function
- maximum load: 5 kg
- weight units: g, oz, lb:oz, ml, fl:oz
- power source: 1× 3 V CR2032 (included)
- dimensions: 15 × 176 × 216 mm





Tare function | Accuracy 1 g | 1× 3 V CR2032 included | 5 kg max.

8 592920 113196

EV028 1/-/-/40

26 17 002 800 EV028

Kitchen timers

- serves as a timer (countdown) and stopwatch (counts from 0)
- triggers audio alert once time limit expires
- selected models even allow 2 counts at the same time
- fitted with magnet for mounting on a fridge/adjustable stand
- draws power from AAA or button battery

- countdown of time max. from: 99 min. 59 sec.
- stopwatch
- memory of the last value
- magnet for fixing
- power source: 1× 1.5 V LR1130 (included)
- dimensions: 7 × 55 × 70 mm
- packaging: 1 pc, blister





Stopwatch | 1× 1.5 V LR1130 included | Magnetic

8 595025 388087

E0202 1/-/10/100

26 05 004 000 TP202

- thermometer design: wire
- stopwatch
- magnet for fixing
- countdown of time max. from: 99 min. 59 sec.
- memory of the last value
- outdoor temperature: -20 °C to +250 °C, res. 1 °C
- temperature warning
- wired probe for sensor: 1.4 m
- the possibility of hanging on the wall
- power of station: 1× 1.5 V AAA (not included)
- main unit size: 18 × 65 × 70 mm
- screen size: 47 × 21 mm





Timer | 1× AAA | Magnetic

8 592920 038307

E2157 1/-/10/40

26 03 015 000 E2157

EMOS
A brand of legrand

www.emos.eu | Order Code Item Number | Packaging Type

Personal scales

- modern look complements a bathroom and helps you keep fit
- ensures healthy weight loss by measuring fat, water & muscle
- memory for 10–13 people (stores height, weight, age and sex)
- draws power from AAA or button batteries (CR2032)
- toughened glass can carry 150–180 kg (depending on model)

- backlight display
- scale surface: tempered glass
- maximum load: 150 kg
- BMI – measurement of fat, water and muscle
- weight units: kg, lb, St
- memory: 10 persons max.
- power source: 2× 1.5 V AAA (included)
- dimensions: 20 × 330 × 320 mm





Tempered glass | Automatic ON/OFF | 2× 1.5 V AAA included | BMI index for 10 users | 150 kg max.

8 592920 000250

EV104 | 1/-/-/6
26 17 010 400 | PT-718

- backlight display
- scale surface: tempered glass
- maximum load: 180 kg
- weight units: kg, lb, St
- power source: 2× 1.5 V AAA (included)
- dimensions: 25 × 280 × 280 mm





Tempered glass | Automatic ON/OFF | 2× 1.5 V AAA included | 180 kg max.

8 592920 026861

EV106 | 1/-/-/5
26 17 010 600 | EV106

- scale surface: tempered glass
- maximum load: 180 kg
- weight units: kg, lb, St
- power source: 1× 3 V CR2032 (included)
- dimensions: 20 × 300 × 300 mm





Tempered glass | Automatic ON/OFF | 1× 3 V CR2032 included | 180 kg max.

8 592920 006962

EV105 | 1/-/-/6
26 17 010 500 | TY6108

EMOS
A brand of legrand

www.emos.eu | Order Code Item Number | Packaging Type

Air quality monitor

EMOS GoSmart

- Overview of the CO2 level in the monitored room
- Display of indoor temperature, humidity and hours
- LED display with permanent backlight
- Colour animation of air quality
- Built-in alarm for elevated CO2 concentration
- Connection to home network via WIFI protocol
- Compatibility with EMOS GoSmart products and TUYA devices
- Voice control with Google Assistant and Amazon Alexa

Powered by

Works with Amazon Alexa Google Assistant

Download on the App Store | GET IT ON Google Play

- option to set the temperature unit: °C/°F
- CO2 alert
- setting CO2 alert limits
- CO2 level indicator
- CO2 measurement range: 400 to 5 000 PPM
- indoor temperature: 0 °C to +50 °C, resolution 0.1°C
- indoor humidity: 20 % to 90 % RH, resolution 1 %
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi
- transmission frequency: 2.4 GHz Wi-Fi
- notifications to the mobile app
- aplication languages: EN, CZ, SK, PL, DE, HU, SI, FR,





Wi Fi | CO_2 detection | CO_2 alert | °C IN | % IN | Clock & alarm clock | Comfort view | Data storage | Backlit display | 1× USB-C

8 592920 126318

E30300	1/-/-/12
26 27 303 000	E30300

Bathroom scales GoSmart

EMOS GoSmart

- Wide range of measuring indicators
- Clear reports in graphical form
- Memory for several users
- Elegant design
- Weighing accuracy to 100 g, max. load capacity 180 kg
- Connection to home network via Bluetooth
- Compatibility with EMOS GoSmart products and TUYA devices

Powered by

Download on the App Store | GET IT ON Google Play

- backlight display
- scale surface: ITO tempered glass
- maximum load: 180 kg
- Bluetooth
- BMI – measurement of fat, water and muscle
- weight units: kg, lb
- memory: 10 persons max.
- power source: 3× 1.5 V AAA (included)
- dimensions: 26 × 300 × 300 mm
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife,
- protocol: Wi-Fi
- transmission frequency: 2.4 GHz Wi-Fi
- notifications to the mobile app
- aplication languages: EN, CZ, SK, PL, DE, HU, SI, FR,





Wi Fi | BMI Index | 18 Body values | % Body fat rate | Muscle mass | Weight reports | 180 kg max. | 3× 1.5 V AAA included

8 592920 122129

EV112	1/-/-/3
26 17 010 902	EV112

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type



TV and audio accessories

Multimedia players, radios

- wirelessly connects to Bluetooth devices (phone, tablet...)
- crystal clear sound, long battery run time and USB charging
- selected models also have a micro SD card slot or radio port
- can be used as handsfree (in car, kitchen) due to microphone
- also, portable FM radios with slot for SD card and USB

tuner frequency: FM 88–108 MHz ▪ USB input ▪ slot for microSD card ▪ MP3 support ▪ headphone output ▪ power supply: 5 V/USB-C (not included) ▪ antenna: telescopic antenna ▪ speaker: 50 mm/4 Ohm/3 W ▪ dimensions: 125 × 30 × 70 mm ▪ packaging: 1 pc, box





3 W | FM tuner | MP3 | Li-Ion 3,7 V 400 mAh

8 592920 076576

E0086 | 1/-/-/32

26 18 002 600 | EM-213

TV wall mounts

- fixed, tilting and bracket mounts for TVs of various sizes
- meet strictest rigidity, load and variability requirements
- in various sizes, load capacity up to 95 kg
- installation material for standard wall types included

holder type: tilting ▪ acceptable screen diagonals: 32–90" (81–229 cm) ▪ min. VESA mounting dimensions: 200 × 200 mm ▪ max. VESA mounting dimensions: 600 × 400 mm ▪ tilt: -10° ▪ distance from a wall: 37 mm ▪ max. load capacity (kg): 60 ▪ dimensions: 20 × 650 × 140 mm ▪ packaging: 1 pc, paper box





37–65" | bubble level | LED TV | neo plasma

8 592920 020227

KT2265 | 1/-/-/6

32 32 226 500 | BETA 600X

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

holder type: tilting ▪ acceptable screen diagonals: 29–65" (74–165 cm) ▪ min. VESA mounting dimensions: 200 × 200 mm ▪ max. VESA mounting dimensions: 400 × 400 mm ▪ tilt: -10° ▪ distance from a wall: 25 mm ▪ max. load capacity (kg): 50 ▪ dimensions: 20 × 470 × 220 mm ▪ packaging: 1 pc, paper box





32–55" | bubble level | LED TV | quick lock Swivel system | slim design

8 595025 384690

KT2244 | 1/-/-/5

32 32 224 400 | BETA 400

---

holder type: console ▪ acceptable screen diagonals: 32–80" (81–203 cm) ▪ min. VESA mounting dimensions: 200 × 200 mm ▪ max. VESA mounting dimensions: 600 × 400 mm ▪ tilt: +/-15° ▪ positioning: +/- 90° ▪ distance from a wall: 76–510 mm ▪ max. load capacity (kg): 60 ▪ dimensions: 510 × 650 × 204 mm ▪ packaging: 1 pc, paper box





37–65" | max. 50 kg | ±3° | ±15° | 90° | MAX. 600 × 400 | full direction | universal use | neo plasma | LED TV

8 592920 033654

KT3564 | 1/-/-/2

32 32 356 400 | GAMMA 600 ULTRA X

---

holder type: console ▪ acceptable screen diagonals: 32–80" (81–203 cm) ▪ min. VESA mounting dimensions: 200 × 200 mm ▪ max. VESA mounting dimensions: 600 × 400 mm ▪ tilt: -15° ▪ positioning: 180° ▪ distance from a wall: 59–635 mm ▪ max. load capacity (kg): 50 ▪ dimensions: 630 × 80 × 300 mm ▪ packaging: 1 pc, paper box





32–65" | max. 40 kg | 59-635 mm | ±3° | -15° | 180° | bubble level | MAX. 600 × 400 | LED TV | neo plasma

8 595025 388643

KT3364 | 1/-/-/2

32 32 336 400 | GAMMA LED 600

---

holder type: console ▪ acceptable screen diagonals: 10–39" (25–99 cm) ▪ min. VESA mounting dimensions: 75 × 75 mm ▪ max. VESA mounting dimensions: 200 × 200 mm ▪ tilt: 10°/-15° ▪ positioning: 180° ▪ distance from a wall: 102–340 mm ▪ max. load capacity (kg): 30 ▪ dimensions: 355 × 90 × 180 mm ▪ packaging: 1 pc, paper box





10–32" | 180° | LED TV | full direction

8 592920 020265

KT3223 | 1/-/-/8

32 32 322 300 | GAMMA 200 ULTRA X

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

Universal remote controllers OFA

- 100 % guaranteed compatibility with your devices
- controller pairs with most devices due to vast code database
- quality material manufacturing
- service support: +420 581 261 101/e-mail: oneforall@emos.cz

---

possible number of controlled devices: 3 ▪ designed for: TV, DVB-T, SAT, KAB TV, IPTV, Amplifier, Tuner, Home cinema, Sound Bar ▪ code search: manual ▪ simple set settings ▪ learning function ▪ code remembered after removing the battery ▪ range: 15 m ▪ power source: 2× AAA ▪ model line: Zapper ▪ dimensions: 20 × 48 × 174 mm ▪ weight: 80 g ▪ packaging: 1 pc, blister





8 716184 059933

KE6820 1/-/3/24

32 33 068 200 URC6820

---

possible number of controlled devices: 8 ▪ designed for: TV, DVB-T, SAT, KAB TV, IPTV, DVD, Blu-ray, Video, Amplifier, Tuner, Home cinema, CD, iPod Dock ▪ code search: manual ▪ code remembered after removing the battery ▪ range: 15 m ▪ power source: 2× AAA ▪ model line: Basic ▪ dimensions: 24 × 50 × 182 mm ▪ weight: 80 g ▪ packaging: 1 pc, blister





8 716184 045080

KE2981 1/-/6/48

32 33 029 810 URC2981

---

possible number of controlled devices: 8 ▪ designed for: TV, DVB-T, SAT, KAB TV, IPTV, DVD, Blu-ray, Video, Amplifier, Tuner, Home cinema, CD, iPod Dock ▪ code search: manual ▪ learning function ▪ code remembered after removing the battery ▪ range: 15 m ▪ power source: 2× AAA ▪ model line: Contour ▪ dimensions: 22.3 × 4.4 × 2.0 cm ▪ weight: 84 g ▪ packaging: 1 pc, blister





8 716184 065040

KE1280 1/-/6/48

32 33 012 800 URC1280

---

possible number of controlled devices: 4 ▪ designed for: TV, DVB-T, SAT, KAB TV, IPTV, DVD, Blu-ray, Video ▪ code search: manual ▪ learning function ▪ code remembered after removing the battery ▪ range: 15 m ▪ power source: 2× AAA ▪ model line: Contour ▪ dimensions: 22.3 × 4.4 × 2.0 cm ▪ weight: 84 g ▪ packaging: 1 pc, blister





8 716184 065019

KE1240 1/-/6/48

32 33 012 400 URC1240

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number	Packaging Type

possible number of controlled devices: 1 ▪ designed for: TV ▪ code search: manual ▪ learning function ▪ code remembered after removing the battery ▪ range: 15 m ▪ power source: 2× AAA ▪ model line: Contour ▪ dimensions: 22.3 × 4.4 × 2.0 cm ▪ weight: 84 g ▪ packaging: 1 pc, blister





8 716184 064982

KE1210 | 1/-/6/48

32 33 012 100 | URC1210

---

possible number of controlled devices: 1 ▪ designed for: TV Hisense ▪ code search: readjustment of the code for a particular HISENSE line ▪ learning function ▪ code remembered after removing the battery ▪ range: 15 m ▪ power source: 2× AAA ▪ model line: special TV ▪ dimensions: 24 × 51 × 205 mm ▪ weight: 90 g ▪ packaging: 1 pc, small paper box





8 716184 067310

KE1916 | 1/-/3/24

32 33 019 160 | KE1916

---

possible number of controlled devices: 2 ▪ designed for: Samsung TV and audio device ▪ code search: readjustment of the code for a particular SAMSUNG line ▪ simple set settings: yes – for audio device ▪ learning function ▪ code remembered after removing the battery ▪ range: 15 m ▪ power source: 2× AAA ▪ macro device mode re-assignment ▪ model line: special TV ▪ dimensions: 23 × 44 × 195 mm ▪ weight: 90 g ▪ packaging: 1 pc, small paper box





8 716184 072635

KE4910 | 1/-/3/24

32 33 049 100 | URC 4910

---

possible number of controlled devices: 2 ▪ designed for: TV LG and audio device ▪ code search: readjustment of the code for a particular LG line ▪ simple set settings: yes – for audio device ▪ learning function ▪ code remembered after removing the battery ▪ range: 15 m ▪ power source: 2× AAA ▪ macro device mode re-assignment ▪ model line: special TV ▪ dimensions: 25 × 44 × 195 mm ▪ weight: 90 g ▪ packaging: 1 pc, small paper box





8 716184 072666

KE4911 | 1/-/3/24

32 33 049 110 | URC 4911

---

possible number of controlled devices: 2 ▪ designed for: Sony TV and audio device ▪ code search: readjustment of the code for a particular SONY line ▪ simple set settings: yes – for audio device ▪ learning function ▪ code remembered after removing the battery ▪ range: 15 m ▪ power source: 2× AA ▪ macro device mode re-assignment ▪ model line: special TV ▪ dimensions: 28 × 47 × 224 mm ▪ weight: 88 g ▪ packaging: 1 pc, small paper box





8 716184 072697

KE4912 | 1/-/3/24

32 33 049 120 | URC 4912

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

possible number of controlled devices: 2 ▪ designed for: Philips TV and audio device ▪ code search: readjustment of the code for a particular Philips line ▪ simple set settings: yes – for audio device ▪ learning function ▪ code remembered after removing the battery ▪ range: 15 m ▪ power source: 2× AAA ▪ macro device mode re-assignment ▪ model line: special TV ▪ dimensions: 22 × 47 × 207 mm ▪ weight: 90 g ▪ packaging: 1 pc, small paper box





8 716184 072727

KE4913
32 33 049 130

1/-/3/24
URC 4913

---

possible number of controlled devices: 2 ▪ designed for: Panasonic TV and audio device ▪ code search: readjustment of the code for a particular PANASONIC line ▪ simple set settings: yes – for audio device ▪ learning function ▪ code remembered after removing the battery ▪ range: 15 m ▪ power source: 2× AA ▪ macro device mode re-assignment ▪ model line: special TV ▪ dimensions: 28 × 47 × 224 mm ▪ weight: 90 g ▪ packaging: 1 pc, small paper box





8 716184 072758

KE4914
32 33 049 140

1/-/3/24
URC 4914

---

possible number of controlled devices: 5 ▪ designed for: TV, DVB-T, SAT, KAB TV, IPTV, DVD, Blu-ray, Amplifier, Tuner, Home Cinema, CD, iPod Dock ▪ code search: automatic ▪ simple set settings ▪ learning function ▪ code remembered after removing the battery ▪ range: 15 m ▪ power source: 4× AAA ▪ macro device mode re-assignment ▪ model line: Smart Control 5 ▪ dimensions: 22.2 × 4.3 × 1.8 cm ▪ weight: 100 g ▪ packaging: 1 pc, small paper box





8 716184 073113

KE7955N
32 33 079 551

1/-/3/12
KE7955N

Power supply extension cords, cable reels, plugs, accessories



Power supply extension cords and sockets

FRENCH

Single socket extension cords

Two-cores PVC

- extension cable with one socket
- length: 3 or 20 m, PVC insulation – ideal for the interior
- conductor: 0.75 mm² or 1 mm², child socket covers

P01303

19 02 010 300

8 592920 064504

1/-/10/30

P01303

3 m

H03VVH2-F
2× 0.75 mm²



- length: 3 m
- number of sockets: 1
- maximum load: 575 W
- conductor cross section: 0.75 mm²
- conductor: H03VVH2-F
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

P01320R

19 01 012 016

8 592920 119297

1/-/-/4

P01320R,
P01320RH

20 m

H05VV-F2
1.5 mm²



- length: 20 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP20
- number of sockets: 1
- thermal fuse: no
- conductor: H05VV-F2
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, shrink

Power supply extension cords and sockets

SCHUKO

MOES Extension cords


1-phase 16A with rubber insulation

- neoprene extension cord – resists water (IP44) and heat
- conductor: 1.5 mm², length 3–10 m, max. load: 3 680 W
- backlit switch with rubber cover
- 4 round sockets, child socket covers
- openings in socket panel body for mounting onto a wall etc.

P14231 | 1/-/-/10

19 22 140 302 | E-K-4E

8 592920 055496





- length: 3 m
- number of sockets: 4× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: rubber/neopren
- conductor: H07RN-F3G 1.5 mm²
- material of the sockets + plugs: plastic /
- packaging: 1 pc, foil

P14251 | 1/-/-/6

19 22 340 501 | E-K-4E

8 592920 076552






- length: 5 m
- number of sockets: 4× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: rubber/neopren
- conductor: H07RN-F3G 1.5 mm²
- material of the sockets + plugs: plastic /
- packaging: 1 pc, foil

P14201 | 1/-/-/6

19 22 341 000 | E-K-4E

8 592920 076569





- length: 10 m
- number of sockets: 4× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: rubber/neopren
- conductor: H07RN-F3G 1.5 mm²
- material of the sockets + plugs: plastic /
- packaging: 1 pc, foil

1-phase 16A with PVC insulation

- extension cables with PVC insulation are ideal for household
- conductor: 1.5 mm² (1.0 mm² uo to 2 m) round sockets
- round sockets, with or without switch
- various lengths, max. load: 3 680 W, child socket covers
- in white – to blend discreetly into the interior

P0321R | 1/5/-/20
19 22 030 153 | SE0311-1,5
8 592920 052662 | 1.5 m | 3×



- length: 1.5 m
- number of sockets: 3× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.5 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

P0323R | 1/5/-/20
19 22 030 308 | SE0313-1,5
8 592920 016336 | 3 m | 3×



- length: 3 m
- number of sockets: 3× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.5 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

P0325R | 1/5/-/15
19 22 030 508 | SE0315-1,5
8 592920 016343 | 5 m | 3×



- length: 5 m
- number of sockets: 3× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.5 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

P0421R | 1/5/-/20
19 22 040 152 | SE0411-1,5
8 592920 052679 | 1.5 m | 4×



- length: 1.5 m
- number of sockets: 4× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.5 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

P0423R | 1/5/-/20
19 22 040 302 | SE0413-1,5
8 592920 052747 | 3 m | 4×



- length: 3 m
- number of sockets: 4× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.5 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

P0425R | 1/5/-/15
19 22 040 502 | SE0415-1,5 (SEH0415-1.5)
8 592920 064429 | 5 m | 4×



- length: 5 m
- number of sockets: 4× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.5 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

P0521R | 1/5/-/15
19 22 050 153 | SE0511-1,5
8 592920 052686 | 1.5 m | 5×



- length: 1.5 m
- number of sockets: 5× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.5 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

P0523R | 1/-/-/15
19 22 050 308 | SE0513-1,5
8 592920 016374 | 3 m | 5×



- length: 3 m
- number of sockets: 5× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.5 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

EMOS
A brand of legrand

www.emos.eu | Order Code Item Number | Packaging Type

P0525R 1/-/-/10
19 22 050 508
SE0515-1,5
(SEH0515-1.5)
8 592920 016381
5 m
5×



- length: 5 m
- number of sockets: 5× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.5 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

P0623R 1/-/-/10
19 22 060 302
SE0613-1,5
8 592920 107416
3 m
6×



- length: 3 m
- number of sockets: 6× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.5 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

P0625R 1/-/-/10
19 22 060 502
SE0615-1,5
8 592920 107423
5 m
6×



- length: 5 m
- number of sockets: 6× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.5 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

P1321R 1/-/-/15
19 22 130 156
SE1311-1,5
8 592920 092644
1.5 m
3×



- length: 1.5 m
- number of sockets: 3× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.5 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

P1323R 1/5/-/20
19 22 130 308
SE1313-1,5
(SEH1313-1.5)
8 592920 016350
3 m
3×



- length: 3 m
- number of sockets: 3× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.5 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

P1325R 1/-/-/10
19 22 130 508
SE1315-1,5
(SEH1315-1.5)
8 592920 016367
5 m
3×



- length: 5 m
- number of sockets: 3× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.5 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

P1421R 1/-/-/15
19 22 140 152
SE1411-1,5
8 592920 092651
1.5 m
4×



- length: 1.5 m
- number of sockets: 4× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.5 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

P1423R 1/-/-/10
19 22 140 303
SE1413-1,5
(SEH1413-1.5)
8 592920 064436
3 m
4×



- length: 3 m
- number of sockets: 4× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.5 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

P1425R 1/5/-/15
19 22 140 503
SE1415-1,5
(SEH1415-1.5)
8 592920 064443
5 m
4×



- length: 5 m
- number of sockets: 4× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.5 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

P1521R 1/-/-/15
19 22 150 154
SE1511-1,5
8 592920 092668
1.5 m
5×



- length: 1.5 m
- number of sockets: 5× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.5 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

EMOS A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

P1523R

19 22 150 308 | 1/-/-/10 | SE1513-1,5 (SEH1513-1.5)

8 592920 016398 | 3 m | 5×



- length: 3 m
- number of sockets: 5× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.5 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

P1525R

19 22 150 508 | 1/-/-/10 | SE1515-1,5 (SEH1515-1.5)

8 592920 016404 | 5 m | 5×



- length: 5 m
- number of sockets: 5× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.5 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

P1621R

19 22 160 152 | 1/-/-/15 | SE1611-1,5

8 592920 092675 | 1.5 m | 6×



- length: 1.5 m
- number of sockets: 6× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.5 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

P1623R

19 22 160 302 | 1/-/-/10 | SE1613-1,5

8 592920 064450 | 3 m | 6×



- length: 3 m
- number of sockets: 6× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.5 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

P1625R

19 22 160 502 | 1/-/-/10 | SE1615-1,5 (SEH1615-1.5)

8 592920 064467 | 5 m | 6×



- length: 5 m
- number of sockets: 6× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.5 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

P1523RU

19 22 150 304 | 1/-/-/10 | P1523RU

8 592920 091265 | 3 m | 5×



- length: 3 m
- number of sockets: 5× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.5 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

PC1321R

19 22 330 152 | 1/-/-/15 | SE1311-1,5

8 592920 092682 | 1.5 m | 3×



- length: 1.5 m
- number of sockets: 3× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.5 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

PC1421R

19 22 340 151 | 1/-/-/15 | SE1411-1,5

8 592920 092699 | 1.5 m | 4×



- length: 1.5 m
- number of sockets: 4× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.5 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

PC1423R

19 22 340 301 | 1/-/-/10 | SE1413-1,5

8 592920 107430 | 3 m | 4×



- length: 3 m
- number of sockets: 4× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.5 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

PC1425R

19 22 340 502 | 1/-/-/15 | SE1415-1,5

8 592920 107447 | 5 m | 4×



- length: 5 m
- number of sockets: 4× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.5 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

EMOS
A brand of legrand

www.emos.eu | Order Code Item Number | Packaging Type

PC1521R 1/-/-/15
19 22 350 151 SE1511-1,5



8 592920 092705 | 1.5 m | 5×

- length: 1.5 m
- number of sockets: 5× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.5 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

PC1621R 1/-/-/15
19 22 360 150 SE1611-1,5



8 592920 092712 | 1.5 m | 6×

- length: 1.5 m
- number of sockets: 6× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.5 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

P0321 1/5/-/20
19 22 030 150 SE0311



8 595025 324870 | 1.5 m | 3×

- length: 1.5 m
- number of sockets: 3× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

P0322 1/5/-/20
19 22 030 200 SE0312



8 595025 313508 | 2 m | 3×

- length: 2 m
- number of sockets: 3× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

P0421 1/5/-/20
19 22 040 150 SE0411



8 595025 324887 | 1.5 m | 4×

- length: 1.5 m
- number of sockets: 4× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

P0521 1/5/-/15
19 22 050 150 SE0511



8 595025 324894 | 1.5 m | 5×

- length: 1.5 m
- number of sockets: 5× 2P + PE SCHUKO
- voltage/current: 250 V~/10 A max.
- maximum load: 2 300 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.0 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

P0622 1/5/-/15
19 22 060 200 SE0612



8 595025 315441 | 2 m | 6×

- length: 2 m
- number of sockets: 6× 2P + PE SCHUKO
- voltage/current: 230 V~/10 A max.
- maximum load: 2 300 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.0 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

P1321 1/5/-/20
19 22 130 150 SE1311



8 595025 324900 | 1.5 m | 3×

- length: 1.5 m
- number of sockets: 3× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

P1322 1/5/-/20
19 22 130 200 SE1312



8 595025 314062 | 2 m | 3×

- length: 2 m
- number of sockets: 3× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

P1422 1/5/-/20
19 22 140 200 SE1412



8 595025 315472 | 2 m | 4×

- length: 2 m
- number of sockets: 4× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

P1522 1/5/-/15

19 22 150 200 | SE1512

8 595025 314093 | 2 m | 5×



- length: 2 m
- number of sockets: 5× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

P1622 1/-/-/10

19 22 160 200 | SE1612

8 595025 315489 | 2 m | 6×



- length: 2 m
- number of sockets: 6× 2P + PE SCHUKO
- voltage/current: 250 V~/10 A max.
- maximum load: 2 300 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.0 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

PC1321 1/5/-/20

19 22 330 150 | SE1311

8 592920 013069 | 1.5 m | 3×



- length: 1.5 m
- number of sockets: 3× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

P04219GU 1/-/3/12

19 22 040 191 | P04219U

8 592920 080306 | 1.9 m | 4×



- length: 1.9 m
- number of sockets: 4× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.5 mm²
- material of the sockets + plugs: PC
- packaging: 1 pc, box

PS1721 1/5/10/20

19 22 570 150 | GES-002

8 595025 365781 | 1.5 m | H05VV-F3G 1.0 mm²



- length: 1.5 m
- number of sockets: 3× 2P + PE + 4× 2P
- voltage/current: 250 V~/10 A max.
- maximum load: 2 300 W
- type of insulation: PVC
- conductor: H05VV-F3G 1 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

P0221U 1/5/-/20

19 02 020 150 | P0221U

8 592920 129548



- length: 1.5 m
- number of sockets: 2× 2P + PE
- maximum load: 3 680 W
- conductor cross section: 1.5 mm²
- conductor: H05VV-F3G
- type of insulation: PVC
- children protection
- packaging: 1 pc, hanging

P1321PD 1/-/-/10

19 02 330 154 | P1321PD

8 592920 134016



- length: 1.5 m
- number of sockets: 3× 2P + PE SCHUKO
- maximum load: 3 680 W
- conductor cross section: 1.5 mm²
- conductor: H05VV-F
- type of insulation: PVC
- children protection
- packaging: 1 ks, box

P0121 1/5/-/20

19 22 010 150 | P0121

8 592920 135877



- length: 1.4 m
- number of sockets: 1× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.0 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

P0422 1/5/-/20

19 22 040 400 | SE0412

8 592920 135907



- length: 2 m
- number of sockets: 4× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.0 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

P0522 1/5/-/20

19 22 050 201 | SE0512

8 592920 135938



- length: 2 m
- number of sockets: 5× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.0 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

EMOS
A brand of legrand

www.emos.eu

Order Code / Item Number | Packaging Type

P0621 1/5/-/15
19 22 060 151 SE0611





- length: 1.4 m
- number of sockets: 6× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.0 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

P0222CQ 1/-/5/10
19 22 120 200 P0222CQ





- length: 2 m
- number of sockets: 2× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.5 mm²
- material of the sockets + plugs: PC
- packaging: 1 pc, box

P1421 1/5/-/20
19 22 140 153 SE1411





- length: 1.4 m
- number of sockets: 4× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.0 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

P1521 1/5/-/15
19 22 150 155 SE1511





- length: 1.4 m
- number of sockets: 5× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.0 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

P1523PD 1/-/5/10
19 22 150 305 P1523PD





- length: 3 m
- number of sockets: 5× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.5 mm²
- material of the sockets + plugs: PC
- packaging: 1 pc, box

P1523CU 1/5/-/10
19 22 150 306 P1523CU





- length: 3 m
- number of sockets: 5× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.5 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

P1621 1/5/-/10
19 22 160 153 SE1611





- length: 1.4 m
- number of sockets: 6× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.0 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

Power supply extension cords and sockets

SCHUKO

Single socket extension cords

1-phase 16A with rubber insulation

- extension cable with 1 or 2 sockets, length 5–30 m
- neoprene or rubber insulation, IP44 enclosure
- conductor cross-section: 1.5 or 2.5 mm, max. load: 3 680 W
- black colour, round socket with lid, child socket covers

P01805 1/-/-/12
19 21 010 504 P01805 (E-008)

8 592920 064566 | 5 m | H07RN-F3G 1.5 mm²



- length: 5 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 1
- thermal fuse: no
- conductor: H07RN-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, shrink

P01810 1/-/-/3
19 21 031 000 P01810 (E-008)

8 592920 011058 | 10 m | H07RN-F3G 1.5 mm²



- length: 10 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 1
- thermal fuse: no
- conductor: H07RN-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, shrink

P01820 1/-/-/2
19 21 032 000 P01820 (E-008)

8 592920 011065 | 20 m | H07RN-F3G 1.5 mm²



- length: 20 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 1
- thermal fuse: no
- conductor: H07RN-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, shrink

P01830 1/-/-/2
19 21 033 000 P01830 (E-008)

8 592920 011072 | 30 m | H07RN-F3G 1.5 mm²



- length: 30 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 1
- thermal fuse: no
- conductor: H07RN-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, shrink

P01810R 1/-/-/3
19 21 011 003 P01810R (E-008)

8 592920 064573 | 10 m | H07RN-F3G 2.5 mm²



- length: 10 m
- conductor cross section: 2.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 1
- thermal fuse: no
- conductor: H07RN-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, shrink

P01825R 1/-/-/4
19 21 012 502 P01825R (E-008)

8 592920 064580 | 25 m | H07RN-F3G 2.5 mm²



- length: 25 m
- conductor cross section: 2.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 1
- thermal fuse: no
- conductor: H07RN-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, shrink

EMOS
A brand of legrand

www.emos.eu | Order Code Item Number | Packaging Type

P0701 | 1/-/-/6
19 21 021 000 | E-012



8 592920 069820 | 10 m | H05RR-F3G 1.5 mm²

- length: 10 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 2
- thermal fuse: no
- conductor: H05RR-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, shrink

P0702 | 1/-/-/4
19 21 021 502 | E-012



8 592920 069837 | 15 m | H05RR-F3G 1.5 mm²

- length: 15 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 2
- thermal fuse: no
- conductor: H05RR-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, shrink

P0703 | 1/-/-/3
19 21 022 000 | E-012



8 592920 069844 | 20 m | H05RR-F3G 1.5 mm²

- length: 20 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 2
- thermal fuse: no
- conductor: H05RR-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, shrink

P0704 | 1/-/-/2
19 21 022 502 | E-012



8 592920 069851 | 25 m | H05RR-F3G 1.5 mm²

- length: 25 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 2
- thermal fuse: no
- conductor: H05RR-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, shrink

1-phase 16A with PVC weatherproof insulation

- extension cable with 1 socket, weather-proof insulation
- IP44 protection allows outdoor use
- wire cross-section: 1.5 mm², max. load 3 680 W
- length: 10 and 20 metres, blue
- round socket with cover, child safety covers

P01510W | 1/-/-/6
19 21 611 000 | P01510W



8 592920 123652

- length: 10 m
- conductor cross section: 1.5 mm²
- voltage: 250 V~
- current: 16 A
- IP rating: IP44
- number of sockets: 1
- thermal fuse: no
- conductor: AT-N05V3V3-F
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, packet

P01520W | 1/-/-/2
19 21 612 000 | P01520W



8 592920 123676

- length: 20 m
- conductor cross section: 1.5 mm²
- voltage: 250 V~
- current: 16 A
- IP rating: IP44
- number of sockets: 1
- thermal fuse: no
- conductor: AT-N05V3V3-F
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, packet

1-phase 16A with PVC insulation

- 2–30 m extension cable with one socket
- conductor cross section: 1.5 mm, max. load: 3 680 W
- PVC insulation - ideal for the garage or workshop
- orange reflective colour - always visible to avoid tripping
- round socket, child socket covers

P0123R | 1/5/-/20
19 21 010 302 | SE0113-1,5



3 m | H05VV-F3G 1.5 mm²

- length: 3 m
- number of sockets: 1× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.5 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, foil+hanging

P0125R | 1/-/-/20
19 21 010 503 | SE0115-1,5



5 m | H05VV-F3G 1.5 mm²

- length: 5 m
- number of sockets: 1× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.5 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, hanging

P0127R | 1/-/-/20
19 21 010 701 | SE0117-1,5



7 m | H05VV-F3G 1.5 mm²

- length: 7 m
- number of sockets: 1× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.5 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, foil+hanging

P0120R | 1/-/-/10
19 21 011 002 | SE0110-1,5



10 m | H05VV-F3G 1.5 mm²

- length: 10 m
- number of sockets: 1× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.5 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, foil+hanging

P0122 | 1/5/-/20
19 21 010 202 | P0122



2 m | H05VV-F3G 1.0 mm²

- length: 2 m
- number of sockets: 1× 2P + PE SCHUKO
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- type of insulation: PVC
- conductor: H05VV-F3G 1.0 mm²
- material of the sockets + plugs: plastic
- packaging: 1 pc, foil+hanging

P01215R | 1/-/-/6
19 21 011 502 | DG-YD01 (YC-DAX-2)



15 m | H05VV-F3G 1.5 mm²

- length: 15 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP20
- number of sockets: 1
- thermal fuse: no
- conductor: H05VV-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, shrink

P01220R | 1/-/-/6
19 21 012 001 | DG-YD01 (YC-DAX-2)



20 m | H05VV-F3G 1.5 mm²

- length: 20 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP20
- number of sockets: 1
- thermal fuse: no
- conductor: H05VV-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, shrink

P01225R | 1/-/-/4
19 21 012 500 | DG-YD01 (YC-DAX-2)



25 m | H05VV-F3G 1.5 mm²

- length: 25 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP20
- number of sockets: 1
- thermal fuse: no
- conductor: H05VV-F3G
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, shrink

EMOS
A brand of legrand

www.emos.eu | Order Code Item Number | Packaging Type

P01230R | 1/-/-/4

19 21 013 001 | P01230R

8 592920 107386 | 30 m | H05VV-F3G 1.5 mm²



- length: 30 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP20
- number of sockets: 1
- thermal fuse: no
- conductor: H05VV-F3G
- children protection
- packaging: 1 pc, shrink

Power supply extension cords and sockets

SCHUKO

MOES

- demountable multi sockets
- max. current load: 16 A, IP20 enclosure
- plastic, white
- fitted with child socket covers

P0320 | 1/5/-/40

19 23 030 000 | DG-DC03 (P03C)

8 595025 324818 | 3×



- product: socket field
- voltage/current: 250 V~/16 A max.
- children protection
- IP rating: IP20
- material: plastic
- packaging: 1 pc, hanging

P0520 | 1/5/-/30

19 23 050 000 | DG-DC05 (P05C)

8 595025 324832 | 5×



- product: socket field
- voltage/current: 250 V~/16 A max.
- children protection
- IP rating: IP20
- material: plastic
- packaging: 1 pc, hanging

P1320 | 1/5/-/45

19 23 130 000 | DG-DC03K (P13C)

8 595025 324849 | 3× | ON/OFF



- product: socket field
- voltage/current: 250 V~/16 A max.
- children protection
- IP rating: IP20
- material: plastic
- packaging: 1 pc, hanging

P1520 | 1/5/-/20

19 23 150 000 | DG-DC05K (P15C)

8 595025 324863 | 5× | ON/OFF



- product: socket field
- voltage/current: 250 V~/16 A max.
- children protection
- IP rating: IP20
- material: plastic
- packaging: 1 pc, hanging

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

Surge protectors

Surge protectors EMOS SCHUKO

- extension cable with overvoltage protection
- protects TV, satellite or laptop from mains overvoltage
- black or white design, backlit switch & child socket covers

- rated voltage: 230 V~, 50 Hz
- maximum load: 3 680 W
- conductor: H05VV-F3G 1.5 mm²
- energy absorption: 900 J
- protection level Up: 1.7 kV (L/N-PE, L-N)
- open-circuit voltage U0C: 6 kV
- response time: <1 ns
- connection indicator
- surge protector indicator
- dimensions: 342 × 66 × 50 mm
- packaging: 1 pc, box





EMI/RFI Free | ↔ 2 m | 4×

50 000€

8 592920 080191

P54212 | 1/-/-/6

19 09 040 202 | G3040

- rated voltage: 230 V~, 50 Hz
- maximum load: 3 680 W
- conductor: H05VV-F3G 1.5 mm²
- energy absorption: 1 800 J
- protection level Up: 1.7 kV (L/N-PE, L-N)
- open-circuit voltage U0C: 6 kV
- response time: <1 ns
- antenna (coaxial protection): yes, IEC
- connection indicator
- surge protector indicator
- dimensions: 342 × 66 × 50 mm
- packaging: 1 pc, box





EMI/RFI Free | ↔ 2 m | 4×

50 000€

8 592920 080221

P54222 | 1/-/-/6

19 09 040 203 | G5142

- rated voltage: 230 V~, 50 Hz
- maximum load: 3 680 W
- conductor: H05VV-F3G 1.5 mm²
- energy absorption: 1 800 J
- protection level Up: 1.7 kV (L/N-PE, L-N)
- open-circuit voltage U0C: 6 kV
- response time: <1 ns
- tel./Fax/DSL protection: yes, tel./fax /DSL,RJ11/RJ
- antenna (coaxial protection): yes, IEC
- connection indicator
- surge protector indicator
- dimensions: 398 × 110 × 50 mm
- packaging: 1 pc, box





EMI/RFI Free | ↔ 3 m | 8×

50 000€

8 592920 080238

P54252 | 1/-/-/6

19 09 480 301 | G5183

Assembled cords

3-phase rubber

- 380 V~ extension cable, length: 5–25 m
- rubber insulation, ideal for outdoor use, enclosure: IP44
- conductor cross-section: 2.5 or 4.0 mm²
- max. load: 3 680 W or 22 000 W

PM0902 1/-/-/2
19 14 071 100 PM0902
8 595025 381088 | 10 m | H05RR-F 2.5 mm²



- length: 10 m
- conductor cross section: 2.5 mm²
- voltage: 400 V~
- current: 16 A
- IP rating: IP44
- number of sockets: 1
- thermal fuse: no
- conductor: CGSG 5C × H05RR-F
- max. unreeled load: 16 A max./3 680 W
- children protection: no
- packaging: 1 pc, packet

PM0904 1/-/-/2
19 14 071 200 PM0904
8 595025 381101 | 20 m | H05RR-F 2.5 mm²



- length: 20 m
- conductor cross section: 2.5 mm²
- voltage: 400 V~
- current: 16 A
- IP rating: IP44
- number of sockets: 1
- thermal fuse: no
- conductor: CGSG 5C × H05RR-F
- max. unreeled load: 16 A max./3 680 W
- children protection: no
- packaging: 1 pc, packet

PM0905 1/-/-/1
19 14 071 250 PM0905
8 595025 381118 | 25 m | H05RR-F 2.5 mm²



- length: 25 m
- conductor cross section: 2.5 mm²
- voltage: 400 V~
- current: 16 A
- IP rating: IP44
- number of sockets: 1
- thermal fuse: no
- conductor: CGSG 5C × H05RR-F
- max. unreeled load: 16 A max./3 680 W
- children protection: no
- packaging: 1 pc, packet

PM1102 1/-/-/2
19 14 081 102 PM1102
8 592920 110065 | 10 m | H07RN-F 4.0 mm²



- length: 10 m
- conductor cross section: 4,0 mm²
- voltage: 400 V~
- current: 32 A
- IP rating: IP44
- number of sockets: 1
- thermal fuse: no
- conductor: CGSG 5C × H07RN-F
- max. unreeled load: 32 A max./22 000 W
- children protection: no
- packaging: 1 pc, packet

PM1103 1/-/-/1
19 14 081 103 PM1103
8 592920 110072 | 15 m | H07RN-F 4.0 mm²



- length: 15 m
- conductor cross section: 4,0 mm²
- voltage: 400 V~
- current: 32 A
- IP rating: IP44
- number of sockets: 1
- thermal fuse: no
- conductor: CGSG 5C × H07RN-F
- max. unreeled load: 32 A max./22 000 W
- children protection: no
- packaging: 1 pc, packet

PM1104 1/-/-/1
19 14 081 104 PM1104
8 592920 110089 | 20 m | H07RN-F 4.0 mm²



- length: 20 m
- conductor cross section: 4,0 mm²
- voltage: 400 V~
- current: 32 A
- IP rating: IP44
- number of sockets: 1
- thermal fuse: no
- conductor: CGSG 5C × H07RN-F
- max. unreeled load: 32 A max./22 000 W
- children protection: no
- packaging: 1 pc, packet

EMOS
A brand of legrand

www.emos.eu | Order Code Item Number | Packaging Type

PM1105 | 1/-/-/1

19 14 081 105 | PM1105

8 592920 110096

25 m

H07RN-F 4.0 mm²



- length: 25 m
- conductor cross section: 4,0 mm²
- voltage: 400 V~
- current: 32 A
- IP rating: IP44
- number of sockets: 1
- thermal fuse: no
- conductor: CGSG 5C × H07RN-F
- max. unreeled load: 32 A max./22 000 W
- children protection: no
- packaging: 1 pc, packet

Cable reels

SCHUKO

3-phase rubber

- 3phase extension cable on reel with neoprene insulation
- immune to water (IP44), extreme temperatures and oils
- power extension cable reel with thermal fuse
- stable stand, reel and rubber-coated grip

- length: 25 m
- conductor cross section: 1.5 mm²
- voltage: 230 V~/400 V~
- current: 13 A
- IP rating: IP44
- number of sockets: 1
- thermal fuse
- conductor: H07RN-F
- max. reeled load: 230 V~: 4.35 A max./1 000 W; 400
- max. unreeled load: 230 V~: 13 A max./3 000 W; 400
- children protection
- packaging: 1 pc, box

25 m | H07RN-F 1.5 mm² | IP44





8 592920 025062

P192250 | 1/-/-/1

19 28 432 500 | E-102A

- length: 33 m
- conductor cross section: 2.5 mm²
- voltage: 230 V~/400 V~
- current: 15 A
- IP rating: IP44
- number of sockets: 1
- thermal fuse
- conductor: H07RN-F
- max. reeled load: 230 V~: 6.52 A max./1 500 W; 400
- max. unreeled load: 230 V~: 15.22 A max./3 500 W;
- children protection
- packaging: 1 pc, box

33 m | H07RN-F 2.5 mm² | IP44





8 592920 028896

P19733 | 1/-/-/1

19 28 733 300 | EM7-533 IP44 440V (E-017)

1-phase weatherproof PVC

- 1-phase extension cable on cable-reel, weather-proof insulation
- resistant to water (IP44), extreme temperatures and oils
- EMOS extension cable with thermal fuse
- stable stand, winding reel and rubberised handle

- length: 50 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 4
- thermal fuse
- conductor: AT-N05V3V3-F
- max. reeled load: 4.8 A max./1 100 W

- max. unreeled load: 16 A max./3 680 W
- children protection: no
- other functions: guiding loop, cable reel brake
- packaging: 1 pc, box















P08650W | 1/-/-/1
19 28 745 000 | P08650W

- length: 25 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 4
- thermal fuse
- conductor: AT-N05V3V3-F
- max. reeled load: 4.8 A max./1 100 W

- max. unreeled load: 16 A max./3 680 W
- children protection: no
- other functions: guiding loop, cable reel brake
- packaging: 1 pc, box















P08625W | 1/-/-/1
19 28 742 500 | P08625W

- length: 20 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 13 A
- IP rating: IP44
- number of sockets: 3
- thermal fuse
- conductor: AT-N05V3V3-F
- max. reeled load: 4.35 A max./1 000 W

- max. unreeled load: 13.04 A max./3 000 W
- children protection: no
- other functions: 2× USB-A ∑2.1 A max.
- packaging: 1 pc, box















P08620W | 1/-/-/1
19 28 732 000 | P08620W

1-phase rubber

- 1phase extension cable on reel w/ neoprene/rubber insulation
- immune to water (IP44), extreme temperatures and oils
- power extension cable reel with thermal fuse
- stable stand, reel and rubber-coated grip

- length: 15 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 13 A
- IP rating: IP44
- number of sockets: 4
- thermal fuse
- conductor: H07RN-F
- max. reeled load: 4.35 A max./1 000 W

- max. unreeled load: 13.04 A max./3 000 W
- children protection: no
- other functions: LED reflect. 20 W/1 600 lm/6 500 K
- packaging: 1 pc, box





15 m | H07RN-F 1.5 mm² | IP44 | LED light | 5 YEARS WARRANTY

8 592920 091821

P08215 | 1/-/-/1
19 28 441 500 | P08215

- length: 25 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 4
- thermal fuse
- conductor: H07RN-F
- max. reeled load: 4.35 A max./1 000 W

- max. unreeled load: 16 A max./3 680 W
- children protection: no
- other functions: guiding loop, cable reel brake
- packaging: 1 pc, box





25 m | H07RN-F 1.5 mm² | IP44 | 5 YEARS WARRANTY

8 592920 096383

P19222 | 1/-/-/1
19 28 242 502 | P19222

- length: 40 m
- conductor cross section: 2.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 4
- thermal fuse
- conductor: H07RN-F
- max. reeled load: 5.2 A max./1 200 W

- max. unreeled load: 16 A max./3 680 W
- children protection: no
- other functions: guiding loop, cable reel brake
- packaging: 1 pc, box





40 m | H07RN-F 2.5 mm² | IP44 | 5 YEARS WARRANTY

8 592920 096376

P19224 | 1/-/-/1
19 28 544 000 | P19224

- length: 50 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 4
- thermal fuse
- conductor: H07RN-F
- max. reeled load: 4.35 A max./1 000 W

- max. unreeled load: 16 A max./3 680 W
- children protection: no
- other functions: guiding loop, cable reel brake
- packaging: 1 pc, box





50 m | H07RN-F 1.5 mm² | IP44 | 5 YEARS WARRANTY

8 592920 096369

P19223 | 1/-/-/1
19 28 245 003 | P19223

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- length: 50 m
- conductor cross section: 2.5 mm²
- voltage: 230 V
- current: 15 A
- IP rating: IP44
- number of sockets: 4
- thermal fuse
- conductor: H07RN-F
- max. reeled load: 6.52 A max./1 500 W
- max. unreeled load: 15.22 A max./3 500 W
- children protection
- packaging: 1 pc, box





50 m | H07RN-F 2.5 mm² | IP44

8 592920 056967

P19220 1/-/-/1

19 28 545 001 E-017

- length: 50 m
- conductor cross section: 2.5 mm²
- voltage: 230 V
- current: 15 A
- IP rating: IP44
- number of sockets: 4
- thermal fuse
- conductor: H05RR-F
- max. reeled load: 6.52 A max./1 500 W
- max. unreeled load: 15.22 A max./3 500 W
- children protection
- packaging: 1 pc, box





50 m | H05RR-F 2.5 mm² | IP44

8 592920 056974

P19221 1/-/-/1

19 28 545 011 E-017

- length: 25 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 4
- thermal fuse
- conductor: H05RR-F3G
- max. reeled load: 4.8 A max./1 100 W
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, box





25 m | H05RR-F3G 1.5 mm² | IP44

8 595025 324924

P08225 1/-/-/1

19 28 242 500 E-10P

- length: 50 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 4
- thermal fuse
- conductor: H05RR-F3G
- max. reeled load: 4.8 A max./1 100 W
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, box





50 m | H05RR-F3G 1.5 mm² | IP44

8 595025 324931

P08250 1/-/-/1

19 28 245 000 E-10DP

- length: 25 m
- conductor cross section: 2.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP44
- number of sockets: 4
- thermal fuse
- conductor: H05RR-F3G
- max. reeled load: 6 A max./1 600 W
- max. unreeled load: 16 A max./3 680 W
- children protection
- packaging: 1 pc, box





25 m | H05RR-F3G 2.5 mm² | IP44

8 592920 016152

P19625 1/-/-/1

19 28 542 500 E-10P

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

1-phase PVC

- 1phase extension cable on reel with PVC insulation
- stable stand, reel and rubber-coated grip
- power extension cable reel with thermal fuse
- some also with backlit switch and guide loop (for reeling)

- length: 25 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 13 A
- IP rating: IP20
- number of sockets: 4
- thermal fuse
- conductor: H05VV-F3G
- max. reeled load: 4.35 A max./1 000 W

- max. unreeled load: 13 A max./3 000 W
- children protection
- other functions: guiding loop,cable reel brake,switch
- packaging: 1 pc, box





25 m | H05VV-F3G 1.5 mm² | IP20

8 595025 389923

P19427 | 1/-/-/1
19 28 042 507 | HJR-4BA

- length: 25 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP20
- number of sockets: 4
- thermal fuse
- conductor: H05VV-F3G
- max. reeled load: 4.8 A max./1 100 W

- max. unreeled load: 16 A max./3 680 W
- children protection: no
- packaging: 1 pc, box





25 m | H05VV-F3G 1.5 mm² | IP20

8 592920 064153

P092251 | 1/-/-/1
19 28 042 504 | P092251

- length: 50 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP20
- number of sockets: 4
- thermal fuse
- conductor: H05VV-F3G
- max. reeled load: 4.8 A max./1 100 W

- max. unreeled load: 16 A max./3 680 W
- children protection: no
- other functions: guiding loop,cable reel brake,switch
- packaging: 1 pc, box





50 m | H05VV-F3G 1.5 mm² | IP20

8 592920 064160

P092501 | 1/-/-/1
19 28 045 003 | P092501

- length: 25 m
- conductor cross section: 2.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP20
- number of sockets: 4
- thermal fuse
- conductor: H05VV-F3G
- max. reeled load: 6 A max./1 600 W

- max. unreeled load: 16 A max./3 600 W
- children protection
- packaging: 1 pc, box





25 m | H05VV-F3G 1.5 mm² | IP20

8 595025 350435

P09225M | 1/-/-/1
19 28 042 501 | E-4

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- length: 40 m
- conductor cross section: 2.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP20
- number of sockets: 4
- thermal fuse
- conductor: H05VV-F3G
- max. reeled load: 6 A max./1 380 W
- max. unreeled load: 16 A max./3 600 W
- children protection
- packaging: 1 pc, box











8 595025 350442

P09240M
19 28 044 001

1/-/-/1
E-4

- length: 25 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP20
- number of sockets: 4
- thermal fuse
- conductor: H05VV-F3G
- max. reeled load: 4.8 A max./1 100 W
- max. unreeled load: 16 A max./3 680 W
- children protection: no
- packaging: 1 pc, box











8 595025 321220

P09225
19 28 042 500

1/-/-/1
DG-4ZR-DB04
(HJR-4A)

- length: 40 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP20
- number of sockets: 4
- thermal fuse
- conductor: H05VV-F
- max. reeled load: 4.8 A max./1 100 W
- max. unreeled load: 16 A max./3 680 W
- children protection: no
- packaging: 1 pc, box











8 592920 025055

P09240
19 28 044 000

1/-/-/1
E-4

- length: 50 m
- conductor cross section: 1.5 mm²
- voltage: 230 V
- current: 16 A
- IP rating: IP20
- number of sockets: 4
- thermal fuse
- conductor: H05VV-F3G
- max. reeled load: 4.8 A max./1 100 W
- max. unreeled load: 16 A max./3 680 W
- children protection: no
- packaging: 1 pc, box











8 595025 321237

P09250
19 28 045 000

1/-/-/1
DG-4ZR-DB04
(HJR-4)

- length: 20 m
- conductor cross section: 1.0 mm²
- voltage: 230 V
- current: 10 A
- IP rating: IP20
- number of sockets: 4
- thermal fuse
- conductor: H05VV-F3G
- max. reeled load: 4.8 A max./1 100 W
- max. unreeled load: 10 A max./2 300 W
- children protection: no
- packaging: 1 pc, box











8 595025 345844

P09220
19 28 142 000

1/-/-/1
DG-4ZR-DB04
(HJR-4AC)

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- length: 15 m
- conductor cross section: 1.0 mm²
- voltage: 230 V
- current: 10 A
- IP rating: IP20
- number of sockets: 4
- thermal fuse
- conductor: H05VV-F3G
- max. reeled load: 4 A max./920 W

- max. unreeled load: 10 A max./2 300 W
- children protection: no
- packaging: 1 pc, box





15 m | H05VV-F3G 1.0 mm² | IP20

8 595025 368218

P19515 | 1/-/-/2

19 28 141 500 | E-4ZR-15M-D04

- length: 10 m
- conductor cross section: 1.0 mm²
- voltage: 230 V
- current: 10 A
- IP rating: IP20
- number of sockets: 4
- thermal fuse
- conductor: H05VV-F3G
- max. reeled load: 4 A max./920 W

- max. unreeled load: 10 A max./2 300 W
- children protection: no
- packaging: 1 pc, box





10 m | H05VV-F3G 1.0 mm² | IP20

8 595025 368232

P19510 | 1/-/-/6

19 28 141 000 | P19510(E-XD04)

Sockets, plugs, adaptors, timers, others

Holders

- extension cable holder, allows fixing to a wall
- in version for 3–4 or 5–6 sockets
- from thin white plastic that visually blends into the wall

P0003C | 1/5/20/80

19 04 030 000 | P3

8 595025 310002



- product: holder for sockets of extension
- material: plastic
- packaging: 1 pc, hanging

P0004C | 1/-/20/80

19 04 040 000 | P0004C

8 592920 064672



- product: holder for sockets of extension
- material: plastic
- packaging: 1 pc, hanging

Plugs, sockets

- accessories for assembling an extension cable
- enclosure: IP20, IP44 or IP65 and max. current load: 16 A
- straight or thin angle plugs – allow furniture close to wall
- many with loop for hanging (cable kept off the ground)
- sockets also fitted with child covers

P0047 1/5/-/200
19 26 010 100 EM-GBYC-01
8 595025 391865 | 16 A | IP20



- product: socket for the flexible cord – st
- voltage/current: 250 V~/16 A max.
- children protection
- IP rating: IP20
- material: plastic
- packaging: 1 pc, hanging

P0066 1/10/-/100
19 06 100 090 E-GRC-03
8 592920 038284 | 16 A | IP20



- product: ultra thin fork for the flexible c
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- IP rating: IP20
- material: plastic
- packaging: 1 pc, hanging

P0039 1/10/-/280
19 06 100 050 EM-GRC-02
8 595025 391834 | 16 A | IP20



- product: plug for the flexible cord, angul
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- IP rating: IP20
- material: plastic
- packaging: 1 pc, hanging

P0038 1/5/-/200
19 06 110 300 EM-GRC-01
8 595025 391841 | 16 A | IP20



- product: plug for the flexible cord, straig
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- IP rating: IP20
- material: plastic
- packaging: 1 pc, hanging

P0034 1/5/-/150
19 06 110 200 YC-FA-4Z
8 595025 363862 | 16 A | IP20



- product: plug for the flexible cord, straig
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- IP rating: IP20
- material: plastic
- packaging: 1 pc, hanging

P0049 1/5/30/60
19 26 010 200 YC-DA-14
8 592920 000397 | 16 A | IP44



- product: the gum socket for the flexible
- voltage/current: 250 V~/16 A max.
- children protection
- IP rating: IP44
- material: rubber
- packaging: 1 pc, hanging

P0050 1/5/20/80
19 06 100 060 YC-DA-14Z
8 592920 000366 | 16 A | IP44



- product: the gum fork for the flexible co
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- IP rating: IP44
- material: rubber
- packaging: 1 pc, hanging

P0072 1/-/6/36
19 05 010 003 P0072
8 592920 078211 | 2× USB Σ 2.1 A max. | 16 A



- product: USB socket
- voltage/current: 250 V~/16 A max.
- children protection
- IP rating: IP20
- material: plastic
- packaging: 1 pc, hanging

Adaptors

- splitter sockets with 1–4 outlets, fitted with child covers
- enable connecting multiple devices into one socket
- max. load 2 300 or 3 680 W, IP20 enclosure
- for connecting devices with round or flat plugs
- with or without switch

P00242 1/4/-/200

19 25 030 020 KF-Z-01/03A

8 595025 325013 | 10 A | IP20



- product: adapter plug 3×
- voltage/current: 250 V~/10 A max.
- IP rating: IP20
- material: plastic
- packaging: 1 pc, hanging

P00063 1/5/-/30

19 05 120 010 ES-01/02K

8 592920 036907 | 16 A | IP20



- product: adapter plug 2× with switch
- voltage/current: 250 V~/16 A max.
- maximum load: 3 680 W
- children protection
- IP rating: IP20
- material: plastic
- packaging: 1 pc, hanging

P00252 1/5/40/80

19 25 030 030 ODL-158

8 595025 390790 | 10 A | IP20



- product: adapter plug 2×
- voltage/current: 250 V~/10 A max.
- children protection
- IP rating: IP20
- material: plastic
- packaging: 1 pc, hanging

P00262 1/5/80/160

19 25 030 040 P00262 (GES-058)

8 595025 390820 | 10 A | IP20



- product: socket with switch
- voltage/current: 250 V~/16 A max.
- children protection
- IP rating: IP20
- material: plastic
- packaging: 1 pc, hanging

P00272 1/4/-/60

19 25 030 050 P00272 (GES-073)

8 595025 390851 | 10 A | IP20



- product: adapter plug 3×
- voltage/current: 250 V~/16 A max.
- children protection
- IP rating: IP20
- material: plastic
- packaging: 1 pc, hanging

P00282 1/5/-/80

19 25 030 060 P00282 (GES-098)

8 595025 390882 | 10 A | IP20



- product: adapter plug 3× with switch
- voltage/current: 250 V~/16 A max.
- children protection
- IP rating: IP20
- material: plastic
- packaging: 1 pc, hanging

P00292 1/-/4/40

19 25 030 090 P00292

8 592920 078242 | 16 A | IP44



- product: socket with switch
- voltage/current: 250 V~/16 A max.
- children protection
- IP rating: IP44
- material: plastic
- packaging: 1 pc, hanging

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

Travel adaptors

- travel aid for connecting to FRENCH and SCHUKO sockets
- often in the form of universal adapter w/ min. 5 plug types
- can be used in more than 150 world countries
- also with adapter w/ SCHUKO socket (used in DE, HU, SI etc.)
- max. current load of 10 or 16 A

- designed for: for Europeans travelling abroad
- using: America, Asia, Australia, New Zealand, China,
- packaging: 1 pc, small box





8 592920 120897

P0056N 1/-/-/20

19 10 000 900 1.103145

- designed for: for foreigners arriving in Europe and h
- using: plugs (USA, GB, JP, CN, AU etc.) into the SCH
- packaging: 1 pc, small box





8 592920 076323

P0055N 1/-/-/50

19 10 000 800 WORLD TO EUROPE 2.0

Timers

- socket with timer automatically turns appliance on/off
- ideal for aquariums, terrariums, pool pumps and lighting
- mechanical timer sockets or more practical digital timers
- digital timer to plan out your week using 8–20 programmes
- can handle a max. load of 3 680 W

- type: digital
- voltage/current: 230 V~/16 A max.
- maximum load: 3 680 W
- minimal time setting: 1 minute
- option of manual switch-on
- number of programs: 8
- number of switching per day: 8
- function to change summer/winter time
- IP rating: IP20
- packaging: 1 pc, box





8 592920 117880

P5521N 1/-/4/16

19 27 110 012 TS-ED1

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- type: mechanical
- voltage/current: 230 V~/16 A max.
- maximum load: 3 680 W
- minimal time setting: 30 minutes
- option of manual switch-on
- number of switching per day: 48
- IP rating: IP20
- packaging: 1 pc, box





8 592920 117859

P5523N
19 27 010 023

1/-/4/16
15GD-3A-1

- type: mechanical
- outdoor using
- voltage/current: 230 V~/16 A max.
- maximum load: 3 680 W
- minimal time setting: 30 minutes
- option of manual switch-on: no
- number of switching per day: 48
- IP rating: IP44
- packaging: 1 pc, box





8 592920 117910

P5526N
19 27 110 033

1/-/4/16
EMT450

- type: mechanical
- voltage/current: 230 V~/16 A max.
- maximum load: 3 680 W
- minimal time setting: 15 minutes
- option of manual switch-on
- number of switching per day: 96
- IP rating: IP20
- packaging: 1 pc, box





3 680 W max. | IP20

8 595025 324771

P5522
19 27 010 010

1/-/4/16
1E/2A

- type: digital
- outdoor using
- voltage/current: 230 V~/16 A max.
- maximum load: 3 680 W
- minimal time setting: 1 minute
- option of manual switch-on
- number of programs: 10
- number of switching per day: 10
- function to change summer/winter time
- IP rating: IP44
- packaging: 1 pc, box





3 680 W max. | IP44

8 592920 000465

P5525
19 27 110 020

1/-/4/12
TGE-5B (TGE-5)

- product: remote-controlled sockets, 2 sockets + 1×
- voltage/current: 250 V~/13 A max.
- maximum load: 3 000 W
- children protection
- IP rating: IP44
- material: plastic
- remote control: power supply 1× 3 V CR2032 (inclu
- packaging: 1 pc, small box





3 000 W max. | IP44 | 433.92 MHz

8 592920 073001

P0068
19 05 111 001

1/-/-/18
52023+50074

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- product: remote-controlled sockets, 3 sockets + 1×
- voltage/current: 230 V~/4.35 A max.
- maximum load: 1 000 W
- children protection
- IP rating: IP20
- material: plastic
- number of positions: 2P + PE
- remote control: power supply 1× 3 V CR2032 (inclu
- packaging: 1 pc, small box



1 000 W max. | IP20 | 433.92 MHz

8 592920 076163

P0069 | 1/-/3/18

19 05 120 030 | P0064

Energy consumption meters

- socket-powered wattmeter to measure appliance's consumption
- helps reduce expenses for electricity
- max. load 3 680 W
- displays: voltage, current, active power and power factor
- also fitted with child covers

- maximum load: 3 680 W
- voltage/current: 230 V~/16 A max.
- measuring range: 2 W–3 680 W
- range of power consumption: 0 kWh–9 999 kWh
- dimensions: 150 × 75 × 75 mm
- packaging: 1 pc, box



16 A
3 680 W max. | IP20

8 592920 113233

P5822 | 1/2/-/16

19 31 000 020 | P5822

GoSmart sockets

EMOS GoSmart

- Remote on/off switching of connected appliances
- Overview of electricity consumption of connected appliances
- Schedule creation and automatic ON/OFF settings
- Setting up delayed shutdown of appliances
- Network connection via WIFI or Bluetooth protocols
- Compatibility with EMOS GoSmart products and TUYA devices
- Voice control with Google Assistant and Amazon Alexa

Powered by tuya

Works with Amazon Alexa Google Assistant

Download on the App Store | GET IT ON Google Play

- product: Wi-Fi socket
- maximum load: 3 680 W
- voltage/current: 230 V~/16 A max.
- transmission frequency: 2.4 GHz WIFI
- children protection
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi
- control by voice assistants
- notifications to the mobile app



Wi Fi | Timer | Countdown | Circulate | Delayed turn off | Power meter | Energy saving

8 592920 120071

P5531 | 1/-/-/32

19 36 055 310 | IP-3002S

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- product: Wi-Fi timer/wattmeter-outside
- maximum load: 3 680 W
- voltage/current: 230 V~/16 A max.
- transmission frequency: 2,4 GHz
- children protection
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi
- control by voice assistants
- notifications to the mobile app





Wi Fi | IP44 | Timer | Countdown | Circulate | Delayed turn off | Power meter | Energy saving

8 592920 122495

P5532 | 1/-/-/30

19 36 055 320 | IP-3006S

- product: ZigBee socket
- maximum load: 3 680 W
- voltage/current: 230 V~/16 A max.
- transmission frequency: 2,4 GHz
- children protection
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Zigbee 3.0
- control by voice assistants
- notifications to the mobile app





ZigBee 3.0 | Timer | Countdown | Circulate | Delayed turn off | Power meter | Energy saving

8 592920 131770

P5533 | 1/-/-/32

19 36 553 300 | IP-3009S

- product: ZigBee socket
- maximum load: 3 680 W
- voltage/current: 230 V~/16 A max.
- transmission frequency: 2,4 GHz
- children protection
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Zigbee 3.0
- control by voice assistants
- notifications to the mobile app





ZigBee 3.0 | Timer | Countdown | Circulate | Delayed turn off | Power meter | Energy saving

8 592920 131817

P5534 | 1/-/-/30

19 36 553 400 | IP-3010S

Industrial plugs, 380 V sockets

- wall-mounted industrial plugs and sockets
- with max. current load of 16 or 32 A
- body made of plastic, screw terminals or screw-free design
- 3 phases, voltage 380–415 V, 4–5 poles

A6210 | 1/-/10/40

31 06 213 240 | 513.1656

8 001636 231440



- product: wall socket
- voltage/current: 380–415 V~/16 A
- IP rating: IP44
- material: plastic
- number of positions: 4
- packaging: no packaging

A6212 | 1/-/-/10

31 06 213 242 | 513.3256

8 001636 231563



- product: wall socket
- voltage/current: 380–415 V~/32 A
- IP rating: IP44
- material: plastic
- number of positions: 4
- packaging: no packaging

EMOS
A brand of legrand

www.emos.eu

Order Code / Item Number | Packaging Type

A6211 1/-/10/40
31 06 213 241 513.1657



8 001636 231457

- product: wall socket
- voltage/current: 380–415 V~/16 A
- IP rating: IP44
- material: plastic
- number of positions: 5
- packaging: no packaging

A6213 1/-/-/10
31 06 213 243 513.3257



8 001636 231570

- product: wall socket
- voltage/current: 380–415 V~/32 A
- IP rating: IP44
- material: plastic
- number of positions: 5
- packaging: no packaging

A6310 1/-/10/50
31 06 213 150 313.1646



8 001636 222806

- product: coupler
- voltage/current: 380–415 V~/16 A
- IP rating: IP44
- material: plastic
- number of positions: 4
- packaging: no packaging

A6312 1/-/10/40
31 06 213 152 313.3246



8 001636 222868

- product: coupler
- voltage/current: 380–415 V~/32 A
- IP rating: IP44
- material: plastic
- number of positions: 4
- packaging: no packaging

A6311 1/-/10/50
31 06 213 151 313.1647



8 001636 222813

- product: coupler
- voltage/current: 380–415 V~/16 A
- IP rating: IP44
- material: plastic
- number of positions: 5
- packaging: no packaging

A6313 1/-/10/40
31 06 213 153 313.3247



8 001636 222875

- product: coupler
- voltage/current: 380–415 V~/32 A
- IP rating: IP44
- material: plastic
- number of positions: 5
- packaging: no packaging

A6110 1/-/10/50
31 05 213 050 213.1636



8 001636 222394

- product: separate plug
- voltage/current: 380–415 V~/16 A
- IP rating: IP44
- material: plastic
- number of positions: 4
- packaging: no packaging

A6114 1/-/10/40
31 05 213 054 213.3236



8 001636 222455

- product: separate plug
- voltage/current: 380–415 V~/32 A
- IP rating: IP44
- material: plastic
- number of positions: 4
- packaging: no packaging

A6111 1/-/10/50
31 05 213 051 213.1637



8 001636 222400

- product: separate plug
- voltage/current: 380–415 V~/16 A
- IP rating: IP44
- material: plastic
- number of positions: 5
- packaging: no packaging

A6115 1/-/10/40
31 05 213 055 213.3237



8 001636 222462

- product: separate plug
- voltage/current: 380–415 V~/32 A
- IP rating: IP44
- material: plastic
- number of positions: 5
- packaging: no packaging

Flexo, assembled cords

Rubber

Two-cores

- rubber two-strand mobile cord with fixed-mount plug
- length 3 or 5 m, various cross sections, black

S03030
24 21 130 212
8 595025 348838
1/5/-/20
SY-10 (YC-B-2ZA, LA016A)
H05RR-F 1.0 mm²
3 m



- conductor: H05RR-F
- length: 3 m
- type of insulation: rubber
- colour: black
- conductor cross section: 2× 1.0 mm²
- type: SY-10
- packaging: 1 pc, hanging

S03050
24 21 150 212
8 595025 348845
1/5/-/20
SY-10 (YC-B-2ZA, LA016A)
H05RR-F 1.0 mm²
5 m



- conductor: H05RR-F
- length: 5 m
- type of insulation: rubber
- colour: black
- conductor cross section: 2× 1.0 mm²
- type: SY-10
- packaging: 1 pc, hanging

S03330
24 21 230 230
8 595025 382757
1/5/-/20
SY-10 (YC-B-2ZA, LA016A)
H05RR-F 1.5 mm²
3 m



- conductor: H05RR-F
- length: 3 m
- type of insulation: rubber
- colour: black
- conductor cross section: 2× 1.5 mm²
- type: SY-10
- packaging: 1 pc, hanging

S03350
24 21 250 230
8 595025 382764
1/5/-/20
SY-10 (YC-B-2ZA, LA016A)
H05RR-F 1.5 mm²
5 m



- conductor: H05RR-F
- length: 5 m
- type of insulation: rubber
- colour: black
- conductor cross section: 2× 1.5 mm²
- type: SY-10
- packaging: 1 pc, hanging

S03030N
24 21 130 213
8 592920 130865
1/5/-/20
S03030N
3 m
H05RN-F2 1.0 mm²



- conductor: H05RN-F
- length: 3 m
- type of insulation: rubber/neopren
- colour: black
- conductor cross section: 2× 1.0 mm²
- type: SY-10
- packaging: 1 pc, hanging

S03031N
24 21 130 214
8 592920 130926
1/5/-/20
S03031N
3 m
H07RN-F2 1 mm²



- conductor: H07RN-F
- length: 3 m
- type of insulation: rubber/neopren
- colour: black
- conductor cross section: 2× 1.0 mm²
- type: SY-10
- packaging: 1 pc, hanging

EMOS A brand of legrand | www.emos.eu | Order Code Item Number | Packaging Type

S03050N 1/5/-/20

24 21 150 213 S03050N

8 592920 130896 | ↔ 5 m | H05RN-F 1.0 mm²



- conductor: H05RN-F
- length: 5 m
- type of insulation: rubber/neopren
- colour: black
- conductor cross section: 2× 1.0 mm²
- type: SY-10
- packaging: 1 pc, hanging

Three-cores

- rubber three-strand mobile cord with fixed-mount plug
- length 3 or 5 m, various cross sections, black

S03130 1/-/5/15

24 25 130 220 SY-11 (GEP-003, LA017D)

8 595025 353825 | H05RR-F 1.0 mm² | ↔ 3 m



- conductor: H05RR-F
- length: 3 m
- type of insulation: rubber
- colour: black
- conductor cross section: 3× 1.0 mm²
- type: SY-11
- packaging: 1 pc, hanging

S03150 1/5/-/15

24 25 150 220 SY-11 (GEP-003, LA017D)

8 595025 353832 | H05RR-F 1.0 mm² | ↔ 5 m



- conductor: H05RR-F
- length: 5 m
- type of insulation: rubber
- colour: black
- conductor cross section: 3× 1.0 mm²
- type: SY-11
- packaging: 1 pc, hanging

S03230 1/-/5/25

24 25 230 220 SY-11 (GEP-003, LA017D)

8 595025 353849 | H05RR-F 1.5 mm² | ↔ 3 m



- conductor: H05RR-F
- length: 3 m
- type of insulation: rubber
- colour: black
- conductor cross section: 3× 1.5 mm²
- type: SY-11
- packaging: 1 pc, hanging

S03250 1/5/-/10

24 25 250 220 SY-11 (GEP-003, LA017D)

8 595025 353856 | H05RR-F 1.5 mm² | ↔ 5 m



- conductor: H05RR-F
- length: 5 m
- type of insulation: rubber
- colour: black
- conductor cross section: 3× 1.5 mm²
- type: SY-11
- packaging: 1 pc, hanging

S03430 1/-/5/10

24 25 430 230 SY-11 (GEP-003, LA017D)

8 595025 383426 | H05RR-F 2.5 mm² | ↔ 3 m



- conductor: H05RR-F
- length: 3 m
- type of insulation: rubber
- colour: black
- conductor cross section: 3× 2.5 mm²
- type: SY-11
- packaging: 1 pc, hanging

S03450 1/-/5/10

24 25 450 230 SY-11 (GEP-003, LA017D)

8 595025 383433 | H05RR-F 2.5 mm² | ↔ 5 m



- conductor: H05RR-F
- length: 5 m
- type of insulation: rubber
- colour: black
- conductor cross section: 3× 2.5 mm²
- type: SY-11
- packaging: 1 pc, hanging

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

S00003 1/5/-/30

24 35 724 032

KF-CR1-H05RR-F3G0.75MM2

8 595025 323132

H05RR-F **0.75** mm² | ↔ 2.4 m



- conductor: H05RR-F
- length: 2.4 m
- type of insulation: braided/rubber
- colour: white
- conductor cross section: 3× 0.75 mm²
- type: KF-CR1-H05RR-F
- packaging: 1 pc, hanging

S03130N 1/-/5/15

24 25 130 210

S03130N

8 592920 130957

↔ 3 m | H05RN-F3G **1.0** mm²



- conductor: H05RN-F
- length: 3 m
- type of insulation: rubber/neopren
- colour: black
- conductor cross section: 3× 1.0 mm²
- type: SY-11
- packaging: 1 pc, hanging

S03150N 1/5/-/15

24 25 150 210

S03150N

8 592920 130988

↔ 5 m | H05RN-F3G **1.0** mm²



- conductor: H05RN-F
- length: 5 m
- type of insulation: rubber/neopren
- colour: black
- conductor cross section: 3× 1.0 mm²
- type: SY-11
- packaging: 1 pc, hanging

S03210N 1/-/-/6

24 25 210 210

S03210N

8 592920 131077

↔ 10 m | H07RN-F3G **1.5** mm²



- conductor: H05RN-F
- length: 10 m
- type of insulation: rubber/neopren
- colour: black
- conductor cross section: 3× 1.5 mm²
- type: SY-11
- packaging: 1 pc, hanging

S03230N 1/-/5/15

24 25 230 210

S03230N

8 592920 131015

↔ 3 m | H07RN-F3G **1.5** mm²



- conductor: H07RN-F
- length: 3 m
- type of insulation: rubber/neopren
- colour: black
- conductor cross section: 3× 1.5 mm²
- type: SY-11
- packaging: 1 pc, hanging

S03250N 1/5/-/10

24 25 250 210

S03250N

8 592920 131046

↔ 5 m | H07RN-F3G **1.5** mm²



- conductor: H07RN-F
- length: 5 m
- type of insulation: rubber/neopren
- colour: black
- conductor cross section: 3× 1.5 mm²
- type: SY-11
- packaging: 1 pc, hanging

Flexo, assembled cords

PVC

Two-cores

- PVC two-strand mobile cord with fixed-mount plug
- black or white
- length 2, 3 or 5 m, various cross sections
- selected models fitted with switch

S12252 1/5/30/60

24 01 520 132 HY020-F

8 595025 314307

H03VVH2-F 0.5 mm² | 2 m




- conductor: H03VVH2-F
- length: 2 m
- type of insulation: PVC
- colour: white
- conductor cross section: 2× 0.5 mm²
- type: KF-H1 (HY020-F)
- packaging: 1 pc, hanging

S15272 1/5/35/70

24 01 720 132 HY020-F

8 595025 314406

H03VVH2-F 0.75 mm² | 2 m




- conductor: H03VVH2-F
- length: 2 m
- type of insulation: PVC
- colour: white
- conductor cross section: 2× 0.75 mm²
- type: KF-H1 (HY020-F)
- packaging: 1 pc, hanging

S15273 1/5/30/60

24 01 730 132 HY020-F

8 595025 314413

H03VVH2-F 0.75 mm² | 3 m




- conductor: H03VVH2-F
- length: 3 m
- type of insulation: PVC
- colour: white
- conductor cross section: 2× 0.75 mm²
- type: KF-H1 (HY020-F)
- packaging: 1 pc, hanging

S15275 1/5/-/30

24 01 750 132 HY020-F

8 595025 314420

H03VVH2-F 0.75 mm² | 5 m



- conductor: H03VVH2-F
- length: 5 m
- type of insulation: PVC
- colour: white
- conductor cross section: 2× 0.75 mm²
- type: KF-H1 (HY020-F)
- packaging: 1 pc, hanging

S19272 1/5/35/70

24 01 720 232 HY020-F

8 595025 318619

H03VVH2-F 0.75 mm² | 2 m



- conductor: H03VVH2-F
- length: 2 m
- type of insulation: PVC
- colour: black
- conductor cross section: 2× 0.75 mm²
- type: KF-H1 (HY020-F)
- packaging: 1 pc, hanging

S19273 1/5/30/60

24 01 730 232 HY020-F

8 595025 318626

H03VVH2-F 0.75 mm² | 3 m



- conductor: H03VVH2-F
- length: 3 m
- type of insulation: PVC
- colour: black
- conductor cross section: 2× 0.75 mm²
- type: KF-H1 (HY020-F)
- packaging: 1 pc, hanging

EMOS A brand of legrand | www.emos.eu | Order Code Item Number | Packaging Type

S19275 | 1/5/-/30
24 01 750 232 | HY020-F



8 595025 318633 | H03VVH2-F 0.75 mm² | ↔ 5 m

- conductor: H03VVH2-F
- length: 5 m
- type of insulation: PVC
- colour: black
- conductor cross section: 2× 0.75 mm²
- type: KF-H1 (HY020-F)
- packaging: 1 pc, hanging

S08272 | 1/5/30/60
24 02 720 132 | KF-H1/S051E4



8 595025 321282 | H03VVH2-F 0.75 mm² | ↔ 2 m

- conductor: H03VVH2-F
- length: 2 m
- type of insulation: PVC
- colour: white
- conductor cross section: 2× 0.75 mm²
- type: KF-H1/S051E4
- packaging: 1 pc, hanging

S08273 | 1/5/25/50
24 02 730 132 | KF-H1/S051E4



8 595025 321299 | H03VVH2-F 0.75 mm² | ↔ 3 m

- conductor: H03VVH2-F
- length: 3 m
- type of insulation: PVC
- colour: white
- conductor cross section: 2× 0.75 mm²
- type: KF-H1/S051E4
- packaging: 1 pc, hanging

S09272 | 1/5/25/50
24 02 720 232 | KF-H1/S051E4



8 595025 321329 | H03VVH2-F 0.75 mm² | ↔ 2 m

- conductor: H03VVH2-F
- length: 2 m
- type of insulation: PVC
- colour: black
- conductor cross section: 2× 0.75 mm²
- type: KF-H1/S051E4
- packaging: 1 pc, hanging

S09273 | 1/5/25/50
24 02 730 232 | KF-H1/S051E4



8 595025 321336 | H03VVH2-F 0.75 mm² | ↔ 3 m

- conductor: H03VVH2-F
- length: 3 m
- type of insulation: PVC
- colour: black
- conductor cross section: 2× 0.75 mm²
- type: KF-H1/S051E4
- packaging: 1 pc, hanging

S1111 | 1/5/35/70
24 00 517 252 | KF-Y11-1(LY-21/LY-22)



8 595025 308764 | H03VVH2-F 0.5 mm² | ↔ 1.75 m

- conductor: H03VVH2-F
- length: 1.75 m
- type of insulation: PVC
- colour: black
- conductor cross section: 2× 0.5 mm²
- type: KF-Y11-1
- packaging: 1 pc, hanging

Three-cores

- PVC three-strand mobile cord with fixed-mount plug
- black or white
- length 2, 3 or 5 m, various cross sections

S14372 | 1/5/-/40
24 13 720 132 | KF-CR2 (HY005-F)



8 595025 314376 | H05VV-F3G 0.75 mm² | ↔ 2 m

- conductor: H05VV-F 3G
- length: 2 m
- type of insulation: PVC
- colour: white
- conductor cross section: 3× 0.75 mm²
- type: KF-CR2 (HY005-F)
- packaging: 1 pc, hanging

S14373 | 1/5/-/30
24 13 730 132 | KF-CR2 (HY005-F)



8 595025 314383 | H05VV-F3G 0.75 mm² | ↔ 3 m

- conductor: H05VV-F 3G
- length: 3 m
- type of insulation: PVC
- colour: white
- conductor cross section: 3× 0.75 mm²
- type: KF-CR2 (HY005-F)
- packaging: 1 pc, hanging

EMOS A brand of legrand | www.emos.eu | Order Code Item Number | Packaging Type

S14375 | 1/5/-/25

24 13 750 132 | KF-CR2 (HY005-F)

8 595025 314390 | H05VV-F3G 0.75 mm² | 5 m



- conductor: H05VV-F 3G
- length: 5 m
- type of insulation: PVC
- colour: white
- conductor cross section: 3× 0.75 mm²
- type: KF-CR2 (HY005-F)
- packaging: 1 pc, hanging

S14312 | 1/5/-/35

24 13 120 132 | KF-CR2 (HY005-F)

8 595025 314314 | H05VV-F3G 1.0 mm² | 2 m



- conductor: H05VV-F 3G
- length: 2 m
- type of insulation: PVC
- colour: white
- conductor cross section: 3× 1.0 mm²
- type: KF-CR2 (HY005-F)
- packaging: 1 pc, hanging

S14313 | 1/5/-/30

24 13 130 132 | KF-CR2 (HY005-F)

8 595025 314321 | H05VV-F3G 1.0 mm² | 3 m



- conductor: H05VV-F 3G
- length: 3 m
- type of insulation: PVC
- colour: white
- conductor cross section: 3× 1.0 mm²
- type: KF-CR2 (HY005-F)
- packaging: 1 pc, hanging

S14315 | 1/5/-/20

24 13 150 132 | KF-CR2 (HY005-F)

8 595025 314338 | H05VV-F3G 1.0 mm² | 5 m



- conductor: H05VV-F 3G
- length: 5 m
- type of insulation: PVC
- colour: white
- conductor cross section: 3× 1.0 mm²
- type: KF-CR2 (HY005-F)
- packaging: 1 pc, hanging

S14322 | 1/5/-/35

24 13 220 132 | KF-CR2 (HY005-F)

8 595025 314345 | H05VV-F3G 1.5 mm² | 2 m



- conductor: H05VV-F 3G
- length: 2 m
- type of insulation: PVC
- colour: white
- conductor cross section: 3× 1.5 mm²
- type: KF-CR2 (HY005-F)
- packaging: 1 pc, hanging

S14323 | 1/5/-/30

24 13 230 132 | KF-CR2 (HY005-F)

8 595025 314352 | H05VV-F3G 1.5 mm² | 3 m



- conductor: H05VV-F 3G
- length: 3 m
- type of insulation: PVC
- colour: white
- conductor cross section: 3× 1.5 mm²
- type: KF-CR2 (HY005-F)
- packaging: 1 pc, hanging

S14325 | 1/5/-/20

24 13 250 132 | KF-CR2 (HY005-F)

8 595025 314369 | H05VV-F3G 1.5 mm² | 5 m



- conductor: H05VV-F 3G
- length: 5 m
- type of insulation: PVC
- colour: white
- conductor cross section: 3× 1.5 mm²
- type: KF-CR2 (HY005-F)
- packaging: 1 pc, hanging

S18372 | 1/5/-/40

24 13 720 232 | KF-CR2 (HY005-F)

8 595025 318640 | H05VV-F3G 0.75 mm² | 2 m



- conductor: H05VV-F 3G
- length: 2 m
- type of insulation: PVC
- colour: black
- conductor cross section: 3× 0.75 mm²
- type: KF-CR2 (HY005-F)
- packaging: 1 pc, hanging

S18373 | 1/5/-/35

24 13 730 232 | KF-CR2 (HY005-F)

8 595025 318657 | H05VV-F3G 0.75 mm² | 3 m



- conductor: H05VV-F 3G
- length: 3 m
- type of insulation: PVC
- colour: black
- conductor cross section: 3× 0.75 mm²
- type: KF-CR2 (HY005-F)
- packaging: 1 pc, hanging

S18312 | 1/5/-/40

24 13 120 232 | KF-CR2 (HY005-F)

8 595025 318671 | H05VV-F3G 1.0 mm² | 2 m



- conductor: H05VV-F 3G
- length: 2 m
- type of insulation: PVC
- colour: black
- conductor cross section: 3× 1.0 mm²
- type: KF-CR2 (HY005-F)
- packaging: 1 pc, hanging

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

S18313 1/5/-/35

24 13 130 232

KF-CR2 (HY005-F)

8 595025 318688

H05VV-F3G 1.0 mm²

3 m



- conductor: H05VV-F 3G
- length: 3 m
- type of insulation: PVC
- colour: black
- conductor cross section: 3× 1.0 mm²
- type: KF-CR2 (HY005-F)
- packaging: 1 pc, hanging

S18315 1/5/-/20

24 13 150 232

KF-CR2 (HY005-F)

8 595025 318695

H05VV-F3G 1.0 mm²

5 m



- conductor: H05VV-F 3G
- length: 5 m
- type of insulation: PVC
- colour: black
- conductor cross section: 3× 1.0 mm²
- type: KF-CR2 (HY005-F)
- packaging: 1 pc, hanging

S18322 1/5/-/35

24 13 220 232

KF-CR2 (HY005-F)

8 595025 318701

H05VV-F3G 1.5 mm²

2 m



- conductor: H05VV-F 3G
- length: 2 m
- type of insulation: PVC
- colour: black
- conductor cross section: 3× 1.5 mm²
- type: KF-CR2 (HY005-F)
- packaging: 1 pc, hanging

S18323 1/5/-/30

24 13 230 232

KF-CR2 (HY005-F)

8 595025 318718

H05VV-F3G 1.5 mm²

3 m



- conductor: H05VV-F 3G
- length: 3 m
- type of insulation: PVC
- colour: black
- conductor cross section: 3× 1.5 mm²
- type: KF-CR2 (HY005-F)
- packaging: 1 pc, hanging

S18325 1/5/-/20

24 13 250 232

KF-CR2 (HY005-F)

8 595025 318725

H05VV-F3G 1.5 mm²

5 m



- conductor: H05VV-F 3G
- length: 5 m
- type of insulation: PVC
- colour: black
- conductor cross section: 3× 1.5 mm²
- type: KF-CR2 (HY005-F)
- packaging: 1 pc, hanging

S11370 1/-/-/50

24 17 715 202

JT003/JT-ST3 (LA010A)

8 595025 323118

H05VV-F3G 0.75 mm²

1.5 m



- conductor: H05VV-F 3G
- length: 1.5 m
- type of insulation: PVC
- colour: black
- conductor cross section: 3× 0.75 mm²
- type: JT003/JT-ST3
- packaging: 1 pc, hanging

EMOS
A brand of legrand

www.emos.eu | Order Code Item Number | Packaging Type

Cables





Data cables UTP, FTP

Data cables CAT 5E

- EMOS structured cabling components always in top quality
- guarantee maximum output, flawless running, long life
- UTP/FTP cables meet standards EN 50173, ANSI/TIA/EIA 568
- also comply with ISO/IEC 11801
- certified by accredited testing and calibration laboratory
- meet standard ČSN EN 50575 (reaction to fire)

type: UTP CAT 5E PVC BASIC ▪ cable structure: wire ▪ material of the inner conductor: copper (Cu) ▪ wire insulation: HDPE ▪ strength member: Nylon 150D ▪ cable sheath: PVC ▪ jacket diameter: 5.0 mm ▪ highest supported protocol: 1000 Base-T (Gigabit Ethernet) ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 305 m, paper box







Cu | PVC | ↔ 305 m

8 592920 040904

S9134	305/-/-/305
23 09 010 120	UTP CAT5E PVC BASIC

type: UTP CAT 5E PVC ▪ cable structure: wire ▪ material of the inner conductor: copper (Cu) ▪ wire insulation: HDPE ▪ strength member: Nylon 150D ▪ cable sheath: PVC ▪ jacket diameter: 5.2 mm ▪ highest supported protocol: 1000 Base-T (Gigabit Ethernet) ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 305 m, paper box





Cu | PVC | ↔ 305 m | 10 YEARS WARRANTY

8 595025 319302

S9121	305/-/-/305
23 09 010 010	UTP CAT5E PVC


EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

type: UTP CAT 5E LSZH ▪ cable structure: wire ▪ material of the inner conductor: copper (Cu) ▪ wire insulation: HDPE ▪ strength member: Nylon 150D ▪ cable sheath: LSZH ▪ jacket diameter: 5.2 mm ▪ low smoke zero halogen (LSZH) coat ▪ highest supported protocol: 1000 Base-T (Gigabit Ethernet) ▪ reaction to the fire: Dca–s2–d2–a1 ▪ dangerous substances: none ▪ packaging: 305 m, paper box





Cu | LSZH | ↔ 305 m | PREMIUM QUALITY | 10 YEARS WARRANTY


8 592920 000045

S9129 305/-/-/305

23 09 010 090 UTP CAT5E LSZH

---

type: FTP CAT 5E PVC ▪ cable structure: wire ▪ shielding: Al/PET 7/12–18 mm ▪ material of the inner conductor: copper (Cu) ▪ wire insulation: HDPE ▪ strength member: Nylon 150D ▪ cable sheath: PVC ▪ jacket diameter: 6.0 mm ▪ highest supported protocol: 1000 Base-T (Gigabit Ethernet) ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 305 m, paper box





Cu | PVC | ↔ 305 m | PREMIUM QUALITY | 10 YEARS WARRANTY


8 595025 319319

S9221 305/-/-/305

23 09 110 010 FTP CAT5E PVC

---

type: FTP CAT 5E LSZH ▪ cable structure: wire ▪ shielding: Al/PET 7/12–18 mm ▪ material of the inner conductor: copper (Cu) ▪ wire insulation: HDPE ▪ strength member: Nylon 150D ▪ cable sheath: LSZH ▪ jacket diameter: 6.0 mm ▪ low smoke zero halogen (LSZH) coat ▪ highest supported protocol: 1000 Base-T (Gigabit Ethernet) ▪ reaction to the fire: Dca–s2–d2–a1 ▪ dangerous substances: none ▪ packaging: 305 m, paper box





Cu | LSZH | ↔ 305 m | PREMIUM QUALITY | 10 YEARS WARRANTY


8 592920 000083

S9222 305/-/-/305

23 09 110 020 FTP CAT5E LSZH

---

type: UTP CAT 5E CCA OEM ▪ cable structure: wire ▪ material of the inner conductor: copper clad Al (CCA) ▪ wire insulation: HDPE ▪ strength member: Nylon 150D ▪ cable sheath: PVC ▪ jacket diameter: 5.2 mm ▪ highest supported protocol: 100 Base-TX ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 305 m, paper box





CCA | PVC | ↔ 305 m

8 592920 000021

S9128 305/-/-/305

23 09 010 080 UTP CAT5E CCA

---

type: UTP CAT 5E 1M ▪ cable structure: stranded wires ▪ material of the inner conductor: copper clad Al (CCA) ▪ wire insulation: HDPE ▪ strength member: Nylon 150D ▪ cable sheath: PVC ▪ jacket diameter: 5 mm ▪ highest supported protocol: 1000 Base-T (Gigabit Ethernet) ▪ reaction to the fire: do not subject to CPR ▪ dangerous substances: do not subject to CPR ▪ packaging: 1 pc, PVC packet





↔ 1 m | CAT 5E | RJ45 2× | 1000 BASE-T | PVC | LIFETIME WARRANTY | 5 YEARS WARRANTY

8 595025 385482

S9122 1/5/25/100

23 09 010 020 UTP CAT5E PVC 1M

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

type: UTP CAT 5E 2M ▪ cable structure: stranded wires ▪ material of the inner conductor: copper clad Al (CCA) ▪ wire insulation: HDPE ▪ strength member: Nylon 150D ▪ cable sheath: PVC ▪ jacket diameter: 5 mm ▪ highest supported protocol: 1000 Base-T (Gigabit Ethernet) ▪ reaction to the fire: do not subject to CPR ▪ dangerous substances: do not subject to CPR ▪ packaging: 1 pc, PVC packet





↔ 2 m | CAT 5E | RJ45 2× | 1000 BASE-T | PVC | LIFETIME WARRANTY | 5 YEARS WARRANTY

8 595025 385499

S9123 | 1/-/-/60

23 09 010 030 | UTP CAT5E PVC 2M

---

type: UTP CAT 5E 3M ▪ cable structure: stranded wires ▪ material of the inner conductor: copper clad Al (CCA) ▪ wire insulation: HDPE ▪ strength member: Nylon 150D ▪ cable sheath: PVC ▪ jacket diameter: 5 mm ▪ highest supported protocol: 1000 Base-T (Gigabit Ethernet) ▪ reaction to the fire: do not subject to CPR ▪ dangerous substances: do not subject to CPR ▪ packaging: 1 pc, PVC packet





↔ 3 m | CAT 5E | RJ45 2× | 1000 BASE-T | PVC | LIFETIME WARRANTY | 5 YEARS WARRANTY

8 595025 385505

S9124 | 1/-/10/40

23 09 010 040 | UTP CAT5E PVC 3M

---

type: UTP CAT 5E 5M ▪ cable structure: stranded wires ▪ material of the inner conductor: copper clad Al (CCA) ▪ wire insulation: HDPE ▪ strength member: Nylon 150D ▪ cable sheath: PVC ▪ jacket diameter: 5 mm ▪ highest supported protocol: 1000 Base-T (Gigabit Ethernet) ▪ reaction to the fire: do not subject to CPR ▪ dangerous substances: do not subject to CPR ▪ packaging: 1 pc, PVC packet





↔ 5 m | CAT 5E | RJ45 2× | 1000 BASE-T | PVC | LIFETIME WARRANTY | 5 YEARS WARRANTY

8 595025 385512

S9125 | 1/-/10/20

23 09 010 050 | UTP CAT5E PVC 5M

---

type: UTP CAT 5E 10M ▪ cable structure: stranded wires ▪ material of the inner conductor: copper clad Al (CCA) ▪ wire insulation: HDPE ▪ strength member: Nylon 150D ▪ cable sheath: PVC ▪ jacket diameter: 5 mm ▪ highest supported protocol: 1000 Base-T (Gigabit Ethernet) ▪ reaction to the fire: do not subject to CPR ▪ dangerous substances: do not subject to CPR ▪ packaging: 1 pc, PVC packet





↔ 10 m | CAT 5E | RJ45 2× | 1000 BASE-T | PVC | LIFETIME WARRANTY | 5 YEARS WARRANTY

8 595025 385529

S9126 | 1/-/10/30

23 09 010 060 | UTP CAT5E PVC 10M

---

type: UTP CAT 5E 15M ▪ cable structure: stranded wires ▪ material of the inner conductor: copper clad Al (CCA) ▪ wire insulation: HDPE ▪ strength member: Nylon 150D ▪ cable sheath: PVC ▪ jacket diameter: 5 mm ▪ highest supported protocol: 1000 Base-T (Gigabit Ethernet) ▪ reaction to the fire: do not subject to CPR ▪ dangerous substances: do not subject to CPR ▪ packaging: 1 pc, PVC packet





↔ 15 m | CAT 5E | RJ45 2× | 1000 BASE-T | PVC | LIFETIME WARRANTY | 5 YEARS WARRANTY

8 595025 385536

S9127 | 1/-/5/20

23 09 010 070 | UTP CAT5E PVC 15M

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

type: UTP CAT 5E 25M ▪ cable structure: stranded wires ▪ material of the inner conductor: copper clad Al (CCA) ▪ wire insulation: HDPE ▪ cable sheath: PVC ▪ jacket diameter: 5 mm ▪ highest supported protocol: 1000 Base-T (Gigabit Ethernet) ▪ reaction to the fire: do not subject to CPR ▪ dangerous substances: do not subject to CPR ▪ packaging: 1 pc, PVC packet





↔ 25 m | CAT 5E | RJ45 2× | 1000 BASE-T | PVC | LIFETIME WARRANTY | 5 YEARS WARRANTY

8 592920 026830


S9130 | 1/-/-/10

23 09 010 100 | UTP CAT5E PVC 25M

Data cables CAT 6

- EMOS structured cabling components always in top quality
- guarantee maximum output, flawless running, long life
- UTP/FTP cables meet standards EN 50173, ANSI/TIA/EIA 568
- also comply with ISO/IEC 11801
- certified by accredited testing and calibration laboratory
- meet standard ČSN EN 50575 (reaction to fire)

type: UTP CAT 6 PVC ▪ cable structure: wire ▪ material of the inner conductor: copper (Cu) ▪ wire insulation: HDPE ▪ strength member: 150D nylon + PE cross ▪ cable sheath: PVC ▪ jacket diameter: 6.3 mm ▪ highest supported protocol: 1000 Base-TX (Gigabit Ethernet) ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 305 m, paper box






Cu | PVC | ↔ 305 m | PREMIUM QUALITY | 10 YEARS WARRANTY

8 595025 341426

S9131 | 305/-/-/305

23 09 020 010 | UTP CAT6 PVC

type: UTP CAT 6 LSZH ▪ cable structure: wire ▪ material of the inner conductor: copper (Cu) ▪ wire insulation: HDPE ▪ strength member: 150D nylon + PE cross ▪ cable sheath: LSZH ▪ jacket diameter: 6.3 mm ▪ low smoke zero halogen (LSZH) coat ▪ highest supported protocol: 1000 Base-TX (Gigabit Ethernet) ▪ reaction to the fire: Dca–s2–d2–a2 ▪ dangerous substances: none ▪ packaging: 305 m, paper box






Cu | LSZH | ↔ 305 m | PREMIUM QUALITY | 10 YEARS WARRANTY

8 592920 000069

S9132 | 305/-/-/305

23 09 020 020 | UTP CAT6 LSZH

type: FTP CAT 6 LSZH ▪ cable structure: wire ▪ shielding: Al/PET 7/12–18 mm ▪ material of the inner conductor: copper (Cu) ▪ wire insulation: HDPE ▪ strength member: 150D nylon + PE cross ▪ cable sheath: LSZH ▪ jacket diameter: 6.3 mm ▪ highest supported protocol: 1000 Base-T (Gigabit Ethernet) ▪ reaction to the fire: Dca–s2–d2–a2 ▪ dangerous substances: none ▪ packaging: 500 m, wooden drum





Cu | LSZH | ↔ 500 m | PREMIUM QUALITY | 10 YEARS WARRANTY

8 592920 032855

S9230 | 500/-/-/500

23 09 120 010 | FTP CAT6 LSZH


EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

type: STP CAT 6A LSZH ▪ cable structure: wire ▪ shielding: Al/PET 7/12–18 mm ▪ material of the inner conductor: copper (Cu) ▪ wire insulation: HDPE ▪ strength member: 150D nylon + PE cross ▪ cable sheath: LSZH ▪ jacket diameter: 7.6 mm ▪ low smoke zero halogen (LSZH) coat ▪ highest supported protocol: 10GBASE-T ▪ reaction to the fire: B2ca–s1–d1–a1 ▪ dangerous substances: none ▪ packaging: 500 m, wooden drum






CAT 6A | Cu | LSZH | ↔ 500 m | 20 YEARS WARRANTY

8 592920 117453

S9310 500/-/-/500

23 09 130 010 STP CAT6A LSZH

type: FFTP CAT 6A LSZH ▪ cable structure: wire ▪ shielding: Al/PET 7/12–18 mm ▪ material of the inner conductor: copper (Cu) ▪ wire insulation: HDPE ▪ strength member: 150D nylon + PE cross ▪ cable sheath: LSZH ▪ jacket diameter: 7.6 mm ▪ low smoke zero halogen (LSZH) coat ▪ highest supported protocol: 10GBASE-T ▪ reaction to the fire: Dca–s1–d2–a1 ▪ dangerous substances: none ▪ packaging: 500 m, wooden drum





CAT 6A | Cu | LSZH | ↔ 500 m | 20 YEARS WARRANTY

8 592920 117460

S9320 500/-/-/500


23 09 130 020 FFTP CAT6A LSZH

Connectors, patch accessories

Connection patch cables, accessories

- for data transfer in computer and telecommunication networks
- terminate in RJ45 connectors (in category CAT5E or CAT6)
- length: 1–25 m, diameter: 5 mm, PVC jacket, 5 year warranty
- separate RJ45 (CAT5E) sockets and connectors also available

- type: connector RJ45 8p8c
- category: CAT6
- designed for cable: UTP
- using: solid wire
- min. lifetime: 1 000 connect/disconnect cycles
- storage temperature: -40–70 °C
- operating temperature: -10–60 °C
- maximum operating humidity: 93 %
- dimensions: 22 × 12 × 10 mm
- packaging: 20 pcs, PVC packet



8 592920 030165

K0103 20/-/-/5 000


18 21 000 700 RJ45 6 UTP SOLID

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number	Packaging Type

- type: connector RJ45 8p8c
- category: CAT5E
- designed for cable: FTP, SFTP, F/UTP
- using: solid wire
- shielding
- min. lifetime: 1 000 connect/disconnect cycles
- storage temperature: -40–70 °C
- operating temperature: -10–60 °C
- maximum operating humidity: 93 %
- dimensions: 22 × 12 × 10 mm
- packaging: 20 pcs, PVC packet



8 592920 030189

K0201 | 20/-/-/5 000
18 21 100 100 | RJ45 5E FTP SOLID

- type: connector RJ45 8p8c
- category: CAT6
- designed for cable: FTP, SFTP, F/UTP
- using: solid wire
- shielding
- min. lifetime: 1 000 connect/disconnect cycles
- storage temperature: -40–70 °C
- operating temperature: -10–60 °C
- maximum operating humidity: 93 %
- dimensions: 22 × 12 × 10 mm
- packaging: 20 pcs, PVC packet



8 592920 030202

K0202 | 20/-/-/5 000
18 21 100 200 | RJ45 6 FTP SOLID

- type: RJ45 connector protection
- using: reduces the stress of RJ45 connector
- dimensions: 30 × 13 × 11 mm
- packaging: 20 pcs, PVC packet



8 592920 017333

K0141 | 20/-/-/5 000
18 21 000 400 | RJ45 PROOF BLACK


- type: RJ45 connector protection
- using: reduces the stress of RJ45 connector
- dimensions: 30 × 13 × 11 mm
- packaging: 20 pcs, PVC packet



8 592920 017340

K0151 | 20/-/-/5 000
18 21 000 600 | RJ45 PROOF GRAY

- type: connector RJ45 8p8c
- category: CAT5E
- designed for cable: UTP
- using: litz wire
- min. lifetime: 1 000 connect/disconnect cycles
- storage temperature: -40–70 °C
- operating temperature: -10–60 °C
- maximum operating humidity: 93 %
- dimensions: 22 × 12 × 10 mm
- packaging: 20 pcs, PVC packet



8 595025 366559

K0101 | 20/-/-/5 000
18 21 000 100 | RJ45 5E UTP WIRE


EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- type: connector RJ45 8p8c
- category: CAT5E
- designed for cable: UTP
- using: solid wire
- min. lifetime: 1 000 connect/disconnect cycles
- storage temperature: -40–70 °C
- operating temperature: -10–60 °C
- maximum operating humidity: 93 %
- dimensions: 22 × 12 × 10 mm
- packaging: 20 pcs, PVC packet



8 592920 009185

K0102 | 20/-/-/5 000
18 21 000 500 | RJ45 5E UTP SOLID


- type: UTP socket wall mount
- reaction to the fire: do not subject to CPR
- dangerous substances: do not subject to CPR
- packaging: 1 pc, PVC packet



8 595025 366467

J0401 | 1/-/25/250
25 12 000 100 | 2XRJ45 SOCKET


- type: keystone RJ45 CAT5E
- category: CAT5E
- designed for cable: UTP
- using: solid wire
- min. lifetime: 1 000 connect/disconnect cycles
- storage temperature: -40–70 °C
- operating temperature: -10–60 °C
- maximum operating humidity: 93 %
- dimensions: 31 × 20 × 15 mm
- packaging: 1 pc, PVC packet



8 596250 005145

K0301 | 1/10/-/500
18 21 000 800 | KSTUTP CAT5E


- type: keystone RJ45 CAT5E
- category: CAT5E
- designed for cable: FTP, SFTP, F/UTP
- using: solid wire
- shielding
- min. lifetime: 1 000 connect/disconnect cycles
- storage temperature: -40–70 °C
- operating temperature: -10–60 °C
- maximum operating humidity: 93 %
- dimensions: 31 × 20 × 15 mm
- packaging: 1 pc, PVC packet



8 596250 005244

K0311 | 1/10/-/500
18 21 100 300 | KSTFTP CAT5E

- type: keystone RJ45 CAT6
- category: CAT6
- designed for cable: FTP, SFTP, F/UTP
- using: solid wire
- shielding
- min. lifetime: 1 000 connect/disconnect cycles
- storage temperature: -40–70 °C
- operating temperature: -10–60 °C
- maximum operating humidity: 93 %
- dimensions: 31 × 20 × 15 mm
- packaging: 1 pc, PVC packet



8 592920 085868

K0312 | 1/10/-/500
18 21 100 301 | KSTFTP CAT6

Connectors IEC, F, reductions

- IEC connectors: straight/angle couplers, plugs and sockets
- F connectors available as straight/angled, screwed/inserted
- F connector size depends on coaxial cable thickness (4–5 mm)

K1331 10/-/-/2 500
18 04 100 100 A203R



10×

- version: plug
- type: direct
- packaging: 10 pcs, packet

K1731 10/-/-/2 500
18 04 000 100 A204R



10×

- version: socket
- type: direct
- packaging: 10 pcs, packet

K1451 10/-/-/2 500
18 04 100 500 A224



10×

- version: plug
- type: angular
- packaging: 10 pcs, packet

K1851 10/-/-/2 500
18 04 000 500 A224F



10×

- version: socket
- type: angular
- packaging: 10 pcs, packet

K1421 10/-/-/2 500
18 04 100 300 A205R



10×

- version: plug
- type: angular
- packaging: 10 pcs, packet

K1821 10/-/-/2 500
18 04 000 300 A206R



10×

- version: socket
- type: angular
- packaging: 10 pcs, packet

R5060 10/-/-/2 500
18 04 300 100 A223R



10×

- version: coupling
- type: direct
- packaging: 10 pcs, packet

K7311 10/-/-/4 000
18 07 100 300 M5609L



10×

- version: screw plug
- type: screwing
- for coax: 3C2V
- dimensions: 4.0/4.9 mm
- packaging: 10 pcs, packet

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

K7321 10/-/-/4 000

18 07 100 400 M5609M

8 595025 357328



10×

- version: plug
- type: screwing
- for coax: CB-500
- dimensions: 4.0/5.5 mm
- packaging: 10 pcs, packet

K7331 10/-/-/4 000

18 07 100 500 M5609H

8 595025 357335



10×

- version: plug
- type: screwing
- for coax: CB-100
- dimensions: 5.0/6.5 mm
- packaging: 10 pcs, packet

K7351 10/-/-/4 000

18 07 100 700 M7351T

8 595025 357359



10×

- version: plug
- type: screwing
- for coax: CB-113N
- dimensions: 5.0/7.0 mm
- packaging: 10 pcs, packet

R5602 10/-/-/4 000

18 07 300 100 M5602

8 595025 357502



10×

- version: coupling
- type: screwing
- for coax: any
- packaging: 10 pcs, packet

R5610 10/-/-/2 000

18 07 300 200 M5610

8 595025 357519



10×

- version: coupling
- type: screwing
- for coax: any
- packaging: 10 pcs, packet

R5639 10/-/-/2 000

18 07 200 100 M5639

8 595025 357526



10×

- version: reduction
- type: screwing
- for coax: any
- packaging: 10 pcs, packet

R5851 10/-/-/2 000

18 07 200 600 M5851

8 595025 357588



10×

- version: reduction IEC-F
- type: screwing/slip-on
- for coax: any
- packaging: 10 pcs, packet

R5852 10/-/-/2 000

18 07 200 700 M5852

8 595025 357595



10×

- version: reduction F-IEC
- type: screwing/slip-on
- for coax: any
- packaging: 10 pcs, packet

R5553 10/-/-/1 500

18 07 200 300 M5553

8 595025 357496



10×

- version: reduction F-BNC
- type: screwing/slip-on
- for coax: any
- packaging: 10 pcs, packet

R5850 10/-/-/2 000

18 07 200 500 M5850

8 595025 357571



10×

- version: reduction F-IEC
- type: screwing/slip-on
- for coax: any
- packaging: 10 pcs, packet

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

K9304 1/150/-/150

18 11 000 200 K9304

8 595025 321350



- connectors: SCART – 3× CINCH + SVHS
- switch IN/OUT
- packaging: 1 pc, packet

K1731.2 2/-/20/480

18 04 000 600 K1731.2

8 592920 086032



- version: socket
- type: direct
- packaging: 2 pc, paper blister

K1821.2 2/-/20/480

18 04 000 601 K1821.2

8 592920 086049



- version: socket
- type: angular
- packaging: 2 pc, paper blister

K1851.2 2/-/20/480

18 04 000 602 K1851.2

8 592920 086056



- version: socket
- type: angular
- packaging: 2 pc, paper blister

K1331.2 2/-/20/480

18 04 100 701 K1331.2

8 592920 086063



- version: plug
- type: direct
- packaging: 2 pc, paper blister

K1421.2 2/-/20/480

18 04 100 702 K1421.2

8 592920 086070



- version: plug
- type: angular
- packaging: 2 pc, paper blister

K1451.2 2/-/20/480

18 04 100 703 K1451.2

8 592920 086087



- version: plug
- type: angular
- packaging: 2 pc, paper blister

R5060.2 2/-/20/480

18 04 300 200 R5060.2

8 592920 086094



- version: coupling
- type: direct
- packaging: 2 pc, paper blister

K7321.2 2/-/20/480

18 07 100 800 K7321.2

8 592920 086100



- version: plug
- type: screwing
- for coax: CB-500
- dimensions: 4.0/5.5 mm
- packaging: 2 pc, paper blister

K7331.2 2/-/20/480

18 07 100 801 K7331.2

8 592920 086117



- version: plug
- type: screwing
- for coax: CB-100
- dimensions: 5.0/6.5 mm
- packaging: 2 pc, paper blister

EMOS
A brand of legrand

www.emos.eu

Order Code / Item Number | Packaging Type

K7351.2 2/-/20/480

18 07 100 802 K7351.2

8 592920 086124



- version: plug
- type: screwing
- for coax: CB-113N
- dimensions: 5.0/7.0 mm
- packaging: 2 pc, paper blister

R5850.2 2/-/20/480

18 07 100 803 R5850.2

8 592920 086131



- version: reduction F-IEC
- type: screwing/slip-on
- for coax: any
- packaging: 2 pc, paper blister

R5852.2 2/-/20/480

18 07 100 804 R5852.2

8 592920 086148



- version: reduction F-IEC
- type: screwing/slip-on
- for coax: any
- packaging: 2 pc, paper blister

R5639.2 2/-/20/480

18 07 201 000 R5639.2

8 592920 086155



- version: reduction
- type: screwing
- for coax: any
- packaging: 2 pc, paper blister

R5602.2 2/-/20/480

18 07 300 300 R5602.2

8 592920 086162



- version: coupling
- type: screwing
- for coax: any
- packaging: 2 pc, paper blister

R5610.2 2/-/20/480

18 07 300 301 R5610.2

8 592920 086179




- version: coupling
- type: screwing
- for coax: any
- packaging: 2 pc, paper blister

Twin-shielded cables CYH

- transparent audio dual links made of OFC
- copper purity: 99.999 %
- CYH dual links in white or black

- conductor cross section: 0.75 mm²
- diameter of the inner conductor: 105× 0.095 mm
- sheath color: transparent, transparent
- maximum operating voltage: 50 V
- packaging: 100 m, reel





OFC Cu 2× 0.75 mm² | PVC ø 2.5 mm | PREMIUM QUALITY | 5 YEARS WARRANTY

8 595025 316288

S8307 100/-/-/400

23 08 207 500 SPTP075

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- conductor cross section: 1.0 mm²
- diameter of the inner conductor: 140× 0.095 mm
- sheath color: transparent, transparent
- maximum operating voltage: 50 V
- packaging: 100 m, reel





OFC Cu 2× 1.00 mm² | PVC ø 3.5 mm | PREMIUM QUALITY | 5 YEARS WARRANTY

8 595025 316295

S8310 | 100/-/-/400
23 08 210 000 | SPTP100

- conductor cross section: 1.5 mm²
- diameter of the inner conductor: 210× 0.095 mm
- sheath color: transparent, transparent
- maximum operating voltage: 50 V
- packaging: 100 m, reel





OFC Cu 2× 1.50 mm² | PVC ø 3.6 mm | PREMIUM QUALITY | 5 YEARS WARRANTY

8 595025 309969

S8314 | 100/-/-/200
23 08 215 000 | SPTP150

- conductor cross section: 2.5 mm²
- diameter of the inner conductor: 350× 0.095 mm
- sheath color: transparent, transparent
- maximum operating voltage: 50 V
- packaging: 100 m, reel






OFC Cu 2× 2.50 mm² | PVC ø 4.0 mm | PREMIUM QUALITY | 5 YEARS WARRANTY

8 595025 309976

S8324 | 100/-/-/200
23 08 225 000 | SPTP250

- conductor cross section: 2.5 mm²
- diameter of the inner conductor: 123× 0.16 mm
- sheath color: transparent, transparent
- maximum operating voltage: 50 V
- packaging: 100 m, PE foil





CCA 2× 2.50 mm² | PVC ø 4.3 mm

8 592920 030141

S8405 | 100/-/-/200
23 08 325 000 | SPTP250 ECO

- conductor cross section: 0.15 mm²
- diameter of the inner conductor: 14× 0.12 mm
- sheath color: white, white
- maximum operating voltage: 50 V
- packaging: 200 m, reel





Cu 2× 0.15 mm² | PVC ø 1.6 mm | PREMIUM QUALITY

8 595025 309136

S8131 | 200/-/-/800
23 08 201 510 | BCYH015W

EMOS A brand of legrand

www.emos.eu

Order Code / Item Number | Packaging Type

- conductor cross section: 0.35 mm²
- diameter of the inner conductor: 30× 0.12 mm
- sheath color: white, white
- maximum operating voltage: 50 V
- packaging: 100 m, reel





Cu 2× 0.35 mm² | PVC ø 2.0 mm | PREMIUM QUALITY

8 595025 309167

S8231 | 100/-/-/400

23 08 203 510 | BCYH035W

- conductor cross section: 0.5 mm²
- diameter of the inner conductor: 45× 0.12 mm
- sheath color: white, white
- maximum operating voltage: 50 V
- packaging: 100 m, reel





Cu 2× 0.50 mm² | PVC ø 2.5 mm | PREMIUM QUALITY

8 595025 309198

S8251 | 100/-/-/400

23 08 205 010 | BCYH050W

- conductor cross section: 0.75 mm²
- diameter of the inner conductor: 67× 0.12 mm
- sheath color: white, white
- maximum operating voltage: 50 V
- packaging: 100 m, reel





Cu 2× 0.75 mm² | PVC ø 2.6 mm | PREMIUM QUALITY

8 595025 309228

S8271 | 100/-/-/400

23 08 207 510 | BCYH075W

- conductor cross section: 1.0 mm²
- diameter of the inner conductor: 90× 0.12 mm
- sheath color: white, white
- maximum operating voltage: 50 V
- packaging: 100 m, reel





Cu 2× 1.00 mm² | PVC ø 3.0 mm | PREMIUM QUALITY

8 592920 022399

S8281 | 100/-/-/200

23 08 210 010 | BCYH100W

- conductor cross section: 1.5 mm²
- diameter of the inner conductor: 133× 0.12 mm
- sheath color: white, white
- maximum operating voltage: 50 V
- packaging: 100 m, reel





Cu 2× 1.50 mm² | PVC ø 3.5 mm | PREMIUM QUALITY

8 592920 022436

S8291 | 100/-/-/200

23 08 215 010 | BCYH150W

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- conductor cross section: 0.15 mm²
- diameter of the inner conductor: 14× 0.12 mm
- sheath color: black, black/red
- maximum operating voltage: 50 V
- packaging: 200 m, reel



Cu 2× 0.15 mm² | PVC ø 1.6 mm

8 595025 309129

S8130 | 200/-/-/800
23 08 201 550 | BCYH015BKR

- conductor cross section: 0.35 mm²
- diameter of the inner conductor: 30× 0.12 mm
- sheath color: black, black/red
- maximum operating voltage: 50 V
- packaging: 100 m, reel



Cu 2× 0.35 mm² | PVC ø 2.0 mm

8 595025 309150

S8230 | 100/-/-/400
23 08 203 550 | BCYH035BKR

- conductor cross section: 0.5 mm²
- diameter of the inner conductor: 45× 0.12 mm
- sheath color: black, black/red
- maximum operating voltage: 50 V
- packaging: 100 m, reel



Cu 2× 0.50 mm² | PVC ø 2.5 mm

8 595025 309181

S8250 | 100/-/-/400
23 08 205 050 | BCYH050BKR

- conductor cross section: 0.75 mm²
- diameter of the inner conductor: 67× 0.12 mm
- sheath color: black, black/red
- maximum operating voltage: 50 V
- packaging: 100 m, reel



Cu 2× 0.75 mm² | PVC ø 2.6 mm

8 595025 309211

S8270 | 100/-/-/400
23 08 207 550 | BCYH075BKR

- conductor cross section: 1.0 mm²
- diameter of the inner conductor: 90× 0.12 mm
- sheath color: black, black/red
- maximum operating voltage: 50 V
- packaging: 100 m, reel



Cu 2× 1.00 mm² | PVC ø 3.0 mm

8 592920 022412

S8280 | 100/-/-/200
23 08 210 050 | BCYH100BKR


EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- conductor cross section: 1.5 mm²
- diameter of the inner conductor: 133× 0.12 mm
- sheath color: black, black/red
- maximum operating voltage: 50 V
- packaging: 100 m, reel





Cu
2× 1.50 mm²


PVC
ø 3.5 mm

8 592920 022450

S8290
23 08 215 050

100/-/-/200
BCYH150BKR

- conductor cross section: 0.5 mm²
- diameter of the inner conductor: 45× 0.12 mm
- sheath color: black, black/red
- maximum operating voltage: 50 V
- packaging: 100 m, PE foil





CCA
2× 0.50 mm²


PVC
ø 2.3 mm

8 592920 015216

S8253
23 08 305 050

100/-/400/800
SPBKR050 ECO

- conductor cross section: 0.75 mm²
- diameter of the inner conductor: 67× 0.12 mm
- sheath color: black, black/red
- maximum operating voltage: 50 V
- packaging: 100 m, PE foil





CCA
2× 0.75 mm²


PVC
ø 2.5 mm

8 592920 015230

S8273
23 08 307 550

100/-/400/800
SPBKR075 ECO

- conductor cross section: 1.0 mm²
- diameter of the inner conductor: 50× 0.16 mm
- sheath color: black, black/red
- maximum operating voltage: 50 V
- packaging: 100 m, PE foil





CCA
2× 1.00 mm²


PVC
ø 3.0 mm

8 592920 015254

S8283
23 08 310 050

100/-/-/400
SPBKR100 ECO

- conductor cross section: 1.5 mm²
- diameter of the inner conductor: 133× 0.12 mm
- sheath color: black, black/red
- maximum operating voltage: 50 V
- packaging: 100 m, PE foil





CCA
2× 1.50 mm²

PVC
ø 3.2 mm

8 592920 015278

S8293
23 08 315 050


100/-/-/400
SPBKR150 ECO


Coaxial cables

Coaxial cables 50 Ohm

- line of high-quality coaxial cables for indoor & outdoor use
- quality of CB series coax. cables guarantees long cable life
- purity of copper ensures stability & excellent transmission
- wide range for choosing the right cable for your application
- certified by accredited testing and calibration laboratory
- meet standard ČSN EN 50575 (products' reaction to fire)
- quality of CB series coax. cables guarantees long cable life

coaxial cable type: RG58/U ▪ intended use: short distribution systems, telecommunication antenna connections ▪ UV resistant ▪ suitable for outdoor use ▪ material of the inner conductor: stranded wires, copper (Cu) ▪ diameter of the inner conductor: 17× 0.19 mm ▪ dielectric type, diameter: SPE 3.0 mm ▪ number of shieldings: 1 ▪ material of the shielding: copper clad aluminium (CCA) ▪ number of braiding wires: 112× 0.12 mm ▪ diameter of cable sheath: 5 mm ▪ material of the cable jacket: PVC ▪ color cable sheath > Cable sheath color: black ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 500 m, wooden drum

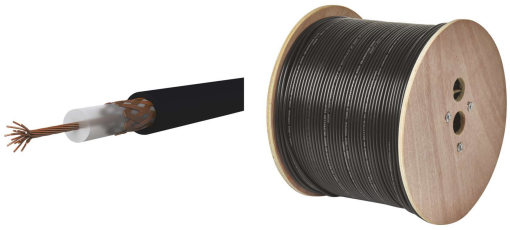



8 592920 087947


S5213	500/-/-/500
23 05 058 401	RG58U

Coaxial cables 75 Ohm

- line of high-quality coaxial cables for indoor & outdoor use
- quality of CB series coax. cables guarantees long cable life
- purity of copper ensures stability & excellent transmission
- wide range for choosing the right cable for your application
- certified by accredited testing and calibration laboratory
- meet standard ČSN EN 50575 (products' reaction to fire)
- quality of CB series coax. cables guarantees long cable life

coaxial cable type: CB113 ▪ intended use: terciary distribution CATV, SAT ▪ material of the inner conductor: copper (Cu) ▪ diameter of the inner conductor: 1.13 mm ▪ dielectric type, diameter: FPE 4.8 mm ▪ number of shieldings: 3 ▪ shielding I. foil: 1× Al/PES ▪ material of the shielding: tinned cooper (CuSn) ▪ number of braiding wires: 144× 0,12 mm ▪ shielding II. foil: Al/PES spiral ▪ diameter of cable sheath: 7,05 mm ▪ material of the cable jacket: PVC ▪ color cable sheath > Cable sheath color: white ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 100 m, reel





8 595025 304896

S5261	100/-/-/200
23 05 113 000	CB113

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

coaxial cable type: CB113 ▪ intended use: terciary distribution CATV, SAT ▪ material of the inner conductor: copper (Cu) ▪ diameter of the inner conductor: 1.13 mm ▪ dielectric type, diameter: FPE 4.8 mm ▪ number of shieldings: 3 ▪ shielding I. foil: 1× Al/PES ▪ material of the shielding: tinned cooper (CuSn) ▪ number of braiding wires: 144× 0,12 mm ▪ shielding II. foil: Al/PES spiral ▪ diameter of cable sheath: 7,05 mm ▪ material of the cable jacket: PVC ▪ color cable sheath > Cable sheath color: white ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 250 m, reel box





250 m | 75 Ω | Cu ø 1.13 mm | CuSn 144× ø 0.12 mm | 3× | PVC ø 7.05 mm | PREMIUM QUALITY | 5 YEARS WARRANTY

8 595025 304902

S5262 | 250/-/-/250

23 05 113 002 | CB113

---

coaxial cable type: CB113 ▪ intended use: terciary distribution CATV, SAT ▪ material of the inner conductor: copper (Cu) ▪ diameter of the inner conductor: 1.13 mm ▪ dielectric type, diameter: FPE 4.8 mm ▪ number of shieldings: 3 ▪ shielding I. foil: 1× Al/PES ▪ material of the shielding: tinned cooper (CuSn) ▪ number of braiding wires: 144× 0,12 mm ▪ shielding II. foil: Al/PES spiral ▪ diameter of cable sheath: 7,05 mm ▪ material of the cable jacket: PVC (HD 624) ▪ color cable sheath > Cable sheath color: white ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 500 m, wooden drum





500 m | 75 Ω | Cu ø 1.13 mm | CuSn 144× ø 0.12 mm | 3× | PVC ø 7.05 mm | PREMIUM QUALITY | 5 YEARS WARRANTY

8 592920 068236

S5268 | 500/-/-/500

23 05 113 003 | CB113

---

coaxial cable type: CB113UV ▪ intended use: outdoor installation, terciary distribution ▪ UV resistant ▪ suitable for outdoor use ▪ material of the inner conductor: copper (Cu) ▪ diameter of the inner conductor: 1.13 mm ▪ dielectric type, diameter: FPE 4.8 mm ▪ number of shieldings: 3 ▪ shielding I. foil: 1× Al/PES ▪ material of the shielding: tinned cooper (CuSn) ▪ number of braiding wires: 144× 0,12 mm ▪ shielding II. foil: Al/PES spiral ▪ diameter of cable sheath: 7,05 mm ▪ material of the cable jacket: PVC UV resistant ▪ color cable sheath > Cable sheath color: black ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 100 m, reel





100 m | 75 Ω | Cu ø 1.13 mm | CuSn 144× ø 0.12 mm | 3× | PVC UV ø 7.05 mm | PREMIUM QUALITY | 5 YEARS WARRANTY

8 595025 326133

S5265 | 100/-/-/200

23 05 113 500 | CB113UV

---

coaxial cable type: CB113UV ▪ intended use: outdoor installation, terciary distribution ▪ UV resistant ▪ suitable for outdoor use ▪ material of the inner conductor: copper (Cu) ▪ diameter of the inner conductor: 1.13 mm ▪ dielectric type, diameter: FPE 4.8 mm ▪ number of shieldings: 3 ▪ shielding I. foil: 1× Al/PES ▪ material of the shielding: tinned cooper (CuSn) ▪ number of braiding wires: 144× 0,12 mm ▪ shielding II. foil: Al/PES spiral ▪ diameter of cable sheath: 7,05 mm ▪ material of the cable jacket: PVC UV resistant ▪ color cable sheath > Cable sheath color: black ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 250 m, reel box





250 m | 75 Ω | Cu ø 1.13 mm | CuSn 144× ø 0.12 mm | 3× | PVC UV ø 7.05 mm | PREMIUM QUALITY | 5 YEARS WARRANTY

8 595025 326140

S5266 | 250/-/-/250

23 05 113 502 | CB113UV

---

coaxial cable type: CB100F ▪ intended use: indoor installation, universal cable ▪ material of the inner conductor: copper (Cu) ▪ diameter of the inner conductor: 1.0 mm ▪ dielectric type, diameter: FPE 4.6 mm ▪ number of shieldings: 2 ▪ shielding I. foil: 1× Al/PES ▪ material of the shielding: tinned cooper (CuSn) ▪ number of braiding wires: 48× 0.12 mm ▪ diameter of cable sheath: 6.5 mm ▪ material of the cable jacket: PVC ▪ color cable sheath > Cable sheath color: white ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 100 m, reel





100 m | 75 Ω | Cu ø 1.0 mm | CuSn 48× ø 0.12 mm | 2× | PVC ø 6.5 mm | PREMIUM QUALITY | 5 YEARS WARRANTY

8 595025 309068

S5141 | 100/-/-/200

23 05 100 200 | CB100F


EMOS
A brand of legrand

www.emos.eu


Order Code
Item Number

Packaging
Type

coaxial cable type: CB100F ▪ intended use: indoor installation, universal cable ▪ material of the inner conductor: copper (Cu) ▪ diameter of the inner conductor: 1.0 mm ▪ dielectric type, diameter: FPE 4.6 mm ▪ number of shieldings: 2 ▪ shielding I. foil: 1× Al/PES ▪ material of the shielding: tinned cooper (CuSn) ▪ number of braiding wires: 48× 0.12 mm ▪ diameter of cable sheath: 6.5 mm ▪ material of the cable jacket: PVC ▪ color cable sheath > Cable sheath color: white ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 250 m, reel box







8 595025 313485


S5241S | 250/-/-/500
23 05 100 201 | CB100F

---

coaxial cable type: CB21D ▪ intended use: indoor installation, interference resistant, CLASS A ▪ material of the inner conductor: copper (Cu) ▪ diameter of the inner conductor: 1.1 mm ▪ dielectric type, diameter: FPE 4.8 mm ▪ number of shieldings: 2 ▪ shielding I. foil: 1× Al/PET ▪ material of the shielding: aluminium (Al) ▪ number of braiding wires: 128× 0.12 mm ▪ diameter of cable sheath: 6.8 mm ▪ material of the cable jacket: PVC ▪ color cable sheath > Cable sheath color: white ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 100 m, reel







8 592920 018224


S5271 | 100/-/-/200
23 05 021 000 | CB21D

---

coaxial cable type: CB21D ▪ intended use: indoor installation, interference resistant, CLASS A ▪ material of the inner conductor: copper (Cu) ▪ diameter of the inner conductor: 1.1 mm ▪ dielectric type, diameter: FPE 4.8 mm ▪ number of shieldings: 2 ▪ shielding I. foil: 1× Al/PET ▪ material of the shielding: aluminium (Al) ▪ number of braiding wires: 128× 0.12 mm ▪ diameter of cable sheath: 6.8 mm ▪ material of the cable jacket: PVC ▪ color cable sheath > Cable sheath color: white ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 500 m, wooden drum








8 592920 062272


S5273 | 500/-/-/500
23 05 021 100 | CB21D

---

coaxial cable type: CB50F ▪ intended use: indoor installation, universal cable ▪ material of the inner conductor: copper (Cu) ▪ diameter of the inner conductor: 0.9 mm ▪ dielectric type, diameter: FPE 4.4 mm ▪ number of shieldings: 2 ▪ shielding I. foil: 1× Al ▪ material of the shielding: tinned cooper (CuSn) ▪ number of braiding wires: 32× 0.12 mm ▪ diameter of cable sheath: 6.3 mm ▪ material of the cable jacket: PVC ▪ color cable sheath > Cable sheath color: white ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 100 m, reel








8 595025 309044


S5131 | 100/-/-/200
23 05 050 200 | CB50F/ RG6 CUSN

---

coaxial cable type: CB50F ▪ intended use: indoor installation, universal cable ▪ material of the inner conductor: copper (Cu) ▪ diameter of the inner conductor: 0.9 mm ▪ dielectric type, diameter: FPE 4.4 mm ▪ number of shieldings: 2 ▪ shielding I. foil: 1× Al ▪ material of the shielding: tinned cooper (CuSn) ▪ number of braiding wires: 32× 0.12 mm ▪ diameter of cable sheath: 6.3 mm ▪ material of the cable jacket: PVC ▪ color cable sheath > Cable sheath color: white ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 250 m, reel box







8 595025 313478

S5231S | 250/-/-/250
23 05 050 201 | CB50F/ RG6 CUSN

EMOS
A brand of legrand

www.emos.eu


Order Code
Item Number

Packaging
Type

coaxial cable type: CB125 ▪ intended use: indoor installation, universal cable ▪ material of the inner conductor: copper (Cu) ▪ diameter of the inner conductor: 1.00 mm ▪ dielectric type, diameter: FPE 4.8 mm ▪ number of shieldings: 2 ▪ shielding I. foil: CCA/PES ▪ material of the shielding: copper clad aluminium (CCA) ▪ number of braiding wires: 64× 0.12 mm ▪ diameter of cable sheath: 6.8 mm ▪ material of the cable jacket: PVC (HD 624) ▪ color cable sheath > Cable sheath color: white ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 100 m, reel








8 592920 052754

S5385 | 100/-/-/200


23 05 120 005 | CB125

---

coaxial cable type: CB130 ▪ intended use: indoor installation, universal cable ▪ material of the inner conductor: copper clad steel (CCS) ▪ diameter of the inner conductor: 1.02 mm ▪ dielectric type, diameter: FPE 4.8 mm ▪ number of shieldings: 2 ▪ shielding I. foil: 1× Al/PES ▪ material of the shielding: aluminium (Al) ▪ number of braiding wires: 32× 0.12 mm ▪ diameter of cable sheath: 6.8 mm ▪ material of the cable jacket: PVC ▪ color cable sheath > Cable sheath color: white ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 100 m, reel








8 595025 311757

S5381 | 100/-/-/200


23 05 130 000 | CB130 / RG6 U

---

coaxial cable type: CB130 ▪ intended use: indoor installation, universal cable ▪ material of the inner conductor: copper clad steel (CCS) ▪ diameter of the inner conductor: 1.02 mm ▪ dielectric type, diameter: FPE 4.8 mm ▪ number of shieldings: 2 ▪ shielding I. foil: 1× Al/PES ▪ material of the shielding: aluminium (Al) ▪ number of braiding wires: 32× 0.12 mm ▪ diameter of cable sheath: 6.8 mm ▪ material of the cable jacket: PVC ▪ color cable sheath > Cable sheath color: white ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 100 m, PVC foil







8 595025 338228

S5381E | 100/-/-/400


23 05 130 010 | CB130 / RG6 U

---

coaxial cable type: CB115/RG6 CU TRISHIELD ▪ intended use: indoor installation, interference resistant, CLASS A ▪ material of the inner conductor: copper (Cu) ▪ diameter of the inner conductor: 1.02 mm ▪ dielectric type, diameter: FPE 4.8 mm ▪ number of shieldings: 3 ▪ shielding I. foil: 1× Al/PET ▪ material of the shielding: aluminium (Al) ▪ number of braiding wires: 96× 0.12 mm ▪ shielding II. foil: Al/PET ▪ diameter of cable sheath: 6.8 mm ▪ material of the cable jacket: PVC ▪ color cable sheath > Cable sheath color: white ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 100 m, reel







8 592920 041000

S5272 | 100/-/-/200


23 05 023 000 | CB115/ RG6 CU TRISHIELD

---

coaxial cable type: CB500 ▪ intended use: CATV distribution ▪ material of the inner conductor: copper (Cu) ▪ diameter of the inner conductor: 0.75 mm ▪ dielectric type, diameter: FPE 3.2 mm ▪ number of shieldings: 3 ▪ shielding I. foil: 1× Al/PES ▪ material of the shielding: tinned cooper (CuSn) ▪ number of braiding wires: 48× 0.12 mm ▪ shielding II. foil: Al/PES ▪ diameter of cable sheath: 5 mm ▪ material of the cable jacket: PVC ▪ color cable sheath > Cable sheath color: white ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 100 m, reel







8 595025 304872

S5252 | 100/-/-/400

23 05 500 000 | CB500

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

coaxial cable type: CB500 ▪ intended use: terminals for connected users, CATV distribution ▪ material of the inner conductor: copper (Cu) ▪ diameter of the inner conductor: 0.75 mm ▪ dielectric type, diameter: FPE 3.2 mm ▪ number of shieldings: 3 ▪ shielding I. foil: 1× Al/PES ▪ material of the shielding: tinned cooper (CuSn) ▪ number of braiding wires: 48× 0.12 mm ▪ shielding II. foil: Al/PES spiral ▪ diameter of cable sheath: 5 mm ▪ material of the cable jacket: PVC ▪ color cable sheath > Cable sheath color: white ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 250 m, reel box





250 m | 75 Ω | Cu ø 0.75 mm | CuSn 48× ø 0.12 mm | 3× | PVC ø 5.0 mm | PREMIUM QUALITY | 5 YEARS WARRANTY

8 595025 304889

S5253 | 250/-/-/500
23 05 500 002 | CB500

---

coaxial cable type: CB135 ▪ intended use: indoor installation, interference resistant, CLASS A ▪ material of the inner conductor: copper clad steel (CCS) ▪ diameter of the inner conductor: 1.02 mm ▪ dielectric type, diameter: FPE 4.8 mm ▪ number of shieldings: 3 ▪ shielding I. foil: 1× Al/PES ▪ material of the shielding: aluminium (Al) ▪ number of braiding wires: 64× 0.12 mm ▪ shielding II. foil: Al/PES ▪ diameter of cable sheath: 6.8 mm ▪ material of the cable jacket: PVC ▪ color cable sheath > Cable sheath color: white ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 100 m, reel





100 m | 75 Ω | CCS ø 1.02 mm | Al 64× ø 0.12 mm | 3× | PVC ø 6.8 mm

8 595025 384058

S5382 | 100/-/-/200
23 05 135 000 | CB135

---

coaxial cable type: CB135 ▪ intended use: unit connections, resistant to interference, CLASS A ▪ material of the inner conductor: copper clad steel (CCS) ▪ diameter of the inner conductor: 1.02 mm ▪ dielectric type, diameter: FPE 4.8 mm ▪ number of shieldings: 3 ▪ shielding I. foil: 1× Al/PES ▪ material of the shielding: aluminium (Al) ▪ number of braiding wires: 64× 0.12 mm ▪ shielding II. foil: Al/PES ▪ diameter of cable sheath: 6.8 mm ▪ material of the cable jacket: PVC ▪ color cable sheath > Cable sheath color: white ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 500 m, wooden drum






500 m | 75 Ω | CCS ø 1.02 mm | Al 64× ø 0.12 mm | 3× | PVC ø 6.8 mm

8 592920 026724

S5383 | 500/-/-/500
23 05 135 010 | CB135 500M

---

coaxial cable type: CB130 ▪ intended use: indoor installation ▪ material of the inner conductor: copper clad steel (CCS) ▪ diameter of the inner conductor: 1.02 mm ▪ dielectric type, diameter: FPE 4.8 mm ▪ number of shieldings: 2 ▪ shielding I. foil: 1× Al/PES ▪ material of the shielding: aluminium (Al) ▪ number of braiding wires: 32× 0.12 mm ▪ diameter of cable sheath: 6.8 mm ▪ material of the cable jacket: PVC ▪ color cable sheath > Cable sheath color: white ▪ reaction to the fire: do not subject to CPR ▪ dangerous substances: do not subject to CPR ▪ packaging: 5 m, headercard






5 m | 75 Ω | CCS ø 1.02 mm | Al 32× ø 0.12 mm | 2× | PVC ø 6.8 mm

8 595025 370648

S5373 | 1/-/-/16
23 05 120 010 | CB130 / RG6 U

---

coaxial cable type: CB130 ▪ intended use: indoor installation ▪ material of the inner conductor: copper clad steel (CCS) ▪ diameter of the inner conductor: 1.02 mm ▪ dielectric type, diameter: FPE 4.8 mm ▪ number of shieldings: 2 ▪ shielding I. foil: 1× Al/PES ▪ material of the shielding: aluminium (Al) ▪ number of braiding wires: 32× 0.12 mm ▪ diameter of cable sheath: 6.8 mm ▪ material of the cable jacket: PVC ▪ color cable sheath > Cable sheath color: white ▪ reaction to the fire: do not subject to CPR ▪ dangerous substances: do not subject to CPR ▪ packaging: 10 m, hanging





10 m | 75 Ω | CCS ø 1.02 mm | Al 32× ø 0.12 mm | 2× | PVC ø 6.8 mm

8 595025 370655


S5374 | 1/-/-/24
23 05 120 020 | CB130 / RG6 U

EMOS
A brand of legrand


www.emos.eu

Order Code / Item Number | Packaging Type

coaxial cable type: CB130 ▪ intended use: indoor installation ▪ material of the inner conductor: copper clad steel (CCS) ▪ diameter of the inner conductor: 1.02 mm ▪ dielectric type, diameter: FPE 4.8 mm ▪ number of shieldings: 2 ▪ shielding I. foil: 1× Al/PES ▪ material of the shielding: aluminium (Al) ▪ number of braiding wires: 32× 0.12 mm ▪ diameter of cable sheath: 6.8 mm ▪ material of the cable jacket: PVC ▪ color cable sheath > Cable sheath color: white ▪ reaction to the fire: do not subject to CPR ▪ dangerous substances: do not subject to CPR ▪ packaging: 15 m, headercard









8 595025 370662

S5375 | 1/-/-/16
23 05 120 030 | CB130 / RG6 U

coaxial cable type: CB130 ▪ intended use: indoor installation ▪ material of the inner conductor: copper clad steel (CCS) ▪ diameter of the inner conductor: 1.02 mm ▪ dielectric type, diameter: FPE 4.8 mm ▪ number of shieldings: 2 ▪ shielding I. foil: 1× Al/PES ▪ material of the shielding: aluminium (Al) ▪ number of braiding wires: 32× 0.12 mm ▪ diameter of cable sheath: 6.8 mm ▪ material of the cable jacket: PVC ▪ color cable sheath > Cable sheath color: white ▪ reaction to the fire: do not subject to CPR ▪ dangerous substances: do not subject to CPR ▪ packaging: 20 m, headercard








8 595025 386250

S5376 | 1/-/-/16
23 05 120 040 | CB130 / RG6 U

coaxial cable type: CB113 LSZH ▪ intended use: unit connections, resistant to interference, CLASS A+ ▪ material of the inner conductor: copper (Cu) ▪ diameter of the inner conductor: 1.13 mm ▪ dielectric type, diameter: FPE 4.8 mm ▪ number of shieldings: 3 ▪ shielding I. foil: 1× Al/PES ▪ material of the shielding: tinned cooper (CuSn) ▪ number of braiding wires: 144× 0,12 mm ▪ shielding II. foil: Al/PES spiral ▪ diameter of cable sheath: 7,05 mm ▪ material of the cable jacket: LSZH ▪ color cable sheath > Cable sheath color: white ▪ reaction to the fire: Eca ▪ dangerous substances: none ▪ packaging: 250 m, paper reel box








8 592920 081976

S5269 | 250/-/-/250
23 05 113 600 | CB113 LSZH

coaxial cable type: RG59B/U ▪ intended use: CCTV cabling ▪ UV resistant ▪ material of the inner conductor: copper plated steel ▪ diameter of the inner conductor: 0,58 mm ▪ dielectric type, diameter: SPE 3.7 mm ▪ number of shieldings: 1 ▪ shielding I. foil ▪ material of the shielding: copper clad aluminium (CCA) ▪ number of braiding wires: 128× 0.12 mm ▪ diameter of cable sheath: 6.05 mm ▪ material of the cable jacket: PVC ▪ color cable sheath > Cable sheath color: black ▪ reaction to the fire: Fca ▪ dangerous substances: none ▪ packaging: 500 m, wooden drum







8 592920 117255

S5194 | 500/-/-/500
23 05 059 009 | RG59BU/128SA

coaxial cable type: 3C2V ▪ intended use: replacement of drilling of the walls ▪ UV resistant ▪ suitable for outdoor use ▪ material of the inner conductor: copper (Cu) ▪ diameter of the inner conductor: 0.5 mm ▪ dielectric type, diameter: PE 1.6 mm ▪ number of shieldings: 1 ▪ material of the shielding: copper clad aluminium (CCA) ▪ number of braiding wires: 32× 0.12 mm ▪ diameter of cable sheath: 3 mm ▪ material of the cable jacket: PVC ▪ color cable sheath > Cable sheath color: white ▪ reaction to the fire: do not subject to CPR ▪ dangerous substances: do not subject to CPR ▪ packaging: 1 pc, PE packet







8 592920 026922

S5378 | 1/-/-/1 000
23 05 032 010 | W-CABLE

Connection AV cables

AV cables blister

- cables for transmitting audio and video, blister pack
- STEREO: 3.5 mm jack (on 1 or 2 ends), length 1.5–5 m
- USB: 2.0 & 3.0, USB-A, micro, USB-C etc, Quick Charge, 1–2 m
- HDMI: multimedia TV cable, 3D or 4K, various plugs, 1.5–5 m
- SCART: SCART/SCART or SCART/RCA plug, length 1–3 m
- CINCH: 2× or 3× CINCH on both ends, length 1.5–5 m
- COAXIAL: antenna to TV, 1.25–15 m, angle/straight plug

SB3015 1/-/-/12

23 33 130 150 SB3015

8 595025 375766 Audio + video Double shielding



connectors: IEC plug – IEC socket ▪ connector type: 2× direct ▪ length: 15 m ▪ number of shieldings: 2 ▪ packaging: 1 pc, blister

SB3103 1/-/-/30

23 33 131 030 SB3103

8 595025 375797 Audio + video Double shielding



connectors: IEC plug – IEC socket 90° ▪ connector type: 1× direct, 1× angular ▪ length: 3.5 m ▪ number of shieldings: 2 ▪ packaging: 1 pc, blister

SB3110 1/-/12/24

23 33 131 100 SB3110

8 595025 375827 Audio + video Double shielding



connectors: IEC plug – IEC socket 90° ▪ connector type: 1× direct, 1× angular ▪ length: 10 m ▪ number of shieldings: 2 ▪ packaging: 1 pc, blister

SB3115 1/-/-/12

23 33 131 150 SB3115

8 595025 375834 Audio + video Double shielding



connectors: IEC plug – IEC socket 90° ▪ connector type: 1× direct, 1× angular ▪ length: 15 m ▪ number of shieldings: 2 ▪ packaging: 1 pc, blister

AV cables polybag

- cables for transmitting audio and video
- STEREO: 3.5 mm jack (on 1 or 2 ends), length 1.5–5 m
- USB: 2.0 & 3.0, USB-A, micro, USB-C etc, Quick Charge, 1–2 m
- HDMI: multimedia TV cable, 3D or 4K, various plugs, 1.5–10 m
- SCART: SCART/SCART or SCART/RCA plug, length 1–3 m
- CINCH: 2× or 3× CINCH on both ends, length 1.5–5 m
- COAXIAL: connect antenna to TV, 1.25–15 m, angle/straight plug

SD3010 1/-/-/30

23 34 130 100 SD3010

8 592920 002421

Audio + video

Double shielding



connectors: IEC plug – IEC socket ▪ connector type: 2× direct ▪ length: 10 m ▪ number of shieldings: 2 ▪ packaging: 1 pc, packet

AV cables hanger

- cables for transmitting audio and video
- USB: speed 2.0, with USB-A and micro USB plug, length 1 m
- HDMI: multimedia TV cable, 3D or 4K, 1.5 m, PVC or nylon
- SCART: SCART/SCART plugs, 1.5 m connection cable
- COAXIAL: connect antenna and TV, 1.25–7.5 m, straight plugs

SL0101 1/5/20/80

23 33 001 010 SL0101

8 595025 374868

4K Resolution

GOLD 24 K



connectors: A plug – A plug ▪ connector type: 2× direct ▪ length: 1.5 m ▪ support of image resolution: 4K ▪ maximum bit rate: 10.2 Gbit/s ▪ material: PVC ▪ packaging: plastic hanging

SL0301 1/5/20/80

23 33 003 010 SL0301

8 595025 374882

4K Resolution

GOLD 24 K



connectors: A plug – A plug ▪ connector type: 2× direct ▪ length: 1.5 m ▪ support of image resolution: 4K ▪ maximum bit rate: 10.2 Gbit/s ▪ material: nylon ▪ packaging: plastic hanging

SL2001 1/5/20/80

23 33 020 010 SL2001

8 595025 380487

1.5 m



length: 1.5 m ▪ connectors: SCART plug – SCART plug ▪ packaging: 1 pc, plastic hanging

AV cables paper blister

- high quality cables for indoor use
- stable video and audio transmission
- connection to all compatible devices thanks to straight and angled connectors

S10100 1/-/-/20
23 33 101 011 S10100
8 592920 107850 | 1.5 m | 2.0 Version



- connectors: A plug – A plug
- connector type: 2× direct
- length: 1.5 m
- HDMI version: 2.0
- support of image resolution: 4K
- maximum bit rate: 18 Gbit/s
- material: PVC
- packaging: 1 pc, blister

S10102 1/-/-/20
23 33 101 013 S10102
8 592920 107904 | 1.5 m | 2.0 Version



- connectors: A plug – C plug
- connector type: 2× direct
- length: 1.5 m
- HDMI version: 2.0
- support of image resolution: 4K
- maximum bit rate: 18 Gbit/s
- material: PVC
- packaging: 1 pc, blister

S10103 1/-/-/20
23 33 101 014 S10103
8 592920 107911 | 1.5 m | 2.0 Version



- connectors: A plug – D plug
- connector type: 2× direct
- length: 1.5 m
- HDMI version: 2.0
- support of image resolution: 4K
- maximum bit rate: 18 Gbit/s
- material: PVC
- packaging: 1 pc, blister

S10110 1/-/-/20
23 33 101 015 S10110
8 592920 107928 | 1.5 m | 2.0 Version



- connectors: A plug – A plug
- connector type: 1× direct, 1× angular
- length: 1.5 m
- HDMI version: 2.0
- support of image resolution: 4K
- maximum bit rate: 18 Gbit/s
- material: PVC
- packaging: 1 pc, blister

S10101 1/-/-/20
23 33 101 016 S10101
8 592920 107959 | 1.5 m | 2.1 Version



- connectors: A plug – A plug
- connector type: 2× direct
- length: 1.5 m
- HDMI version: 2.1
- support of image resolution: 8K
- maximum bit rate: 48 Gbit/s
- material: PVC
- packaging: 1 pc, blister

S10300 1/-/-/20
23 33 101 031 S10300
8 592920 107867 | 3 m | 2.0 Version



- connectors: A plug – A plug
- connector type: 2× direct
- length: 3 m
- HDMI version: 2.0
- support of image resolution: 4K
- maximum bit rate: 18 Gbit/s
- material: PVC
- packaging: 1 pc, blister

S10310 1/-/-/20
23 33 101 032 S10310
8 592920 107935 | 3 m | 2.0 Version



- connectors: A plug – A plug
- connector type: 1× direct, 1× angular
- length: 3 m
- HDMI version: 2.0
- support of image resolution: 4K
- maximum bit rate: 18 Gbit/s
- material: PVC
- packaging: 1 pc, blister

S10500 1/-/-/10
23 33 101 051 S10500
8 592920 107874 | 5 m | 2.0 Version



- connectors: A plug – A plug
- connector type: 2× direct
- length: 5 m
- HDMI version: 2.0
- support of image resolution: 4K
- maximum bit rate: 18 Gbit/s
- material: PVC
- packaging: 1 pc, blister

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

S10510 1/-/-/10

23 33 101 052 S10510

8 592920 107942 | ↔ 5 m | 2.0 Version



- connectors: A plug – A plug
- connector type: 1× direct, 1× angular
- length: 5 m
- HDMI version: 2.0
- support of image resolution: 4K
- maximum bit rate: 18 Gbit/s
- material: PVC
- packaging: 1 pc, blister

S10000 1/-/-/20

23 33 101 070 S10000

8 592920 107843 | ↔ 0.75 m | 2.0 Version



- connectors: A plug – A plug
- connector type: 2× direct
- length: 0.75 m
- HDMI version: 2.0
- support of image resolution: 4K
- maximum bit rate: 18 Gbit/s
- material: PVC
- packaging: 1 pc, blister

S11000 1/-/-/10

23 33 101 100 S11000

8 592920 107881 | ↔ 10 m | 2.0 Version



- connectors: A plug – A plug
- connector type: 2× direct
- length: 10 m
- HDMI version: 2.0
- support of image resolution: 4K
- maximum bit rate: 18 Gbit/s
- material: PVC
- packaging: 1 pc, blister

S30500 1/-/-/20

23 33 130 051 S30500

8 592920 107751 | ↔ 5 m | VHF/UHF



- connectors: IEC plug – IEC socket
- connector type: 2× direct
- length: 5 m
- number of shieldings: 2
- packaging: 1 pc, blister

S30510 1/-/-/20

23 33 130 052 S30510

8 592920 107829 | ↔ 5 m | VHF/UHF



- connectors: IEC plug – IEC socket
- connector type: 1× direct, 1× angular
- length: 5 m
- number of shieldings: 2
- packaging: 1 pc, blister

S31000 1/-/-/20

23 33 130 101 S31000

8 592920 107713 | ↔ 10 m | VHF/UHF



- connectors: IEC plug – IEC socket
- connector type: 2× direct
- length: 10 m
- number of shieldings: 2
- packaging: 1 pc, blister

S31010 1/-/-/20

23 33 130 102 S31010

8 592920 107782 | ↔ 10 m | VHF/UHF



- connectors: IEC plug – IEC socket
- connector type: 1× direct, 1× angular
- length: 10 m
- number of shieldings: 2
- packaging: 1 pc, blister

S30100 1/-/-/20

23 33 130 120 S30100

8 592920 107706 | ↔ 1.25 m | VHF/UHF



- connectors: IEC plug – IEC socket
- connector type: 2× direct
- length: 1.25 m
- number of shieldings: 2
- packaging: 1 pc, blister

S30110 1/-/-/20

23 33 130 121 S30110

8 592920 107775 | ↔ 1.25 m | VHF/UHF



- connectors: IEC plug – IEC socket
- connector type: 1× direct, 1× angular
- length: 1.25 m
- number of shieldings: 2
- packaging: 1 pc, blister

S31500 1/-/-/10

23 33 130 151 S31500

8 592920 107720 | ↔ 15 m | VHF/UHF



- connectors: IEC plug – IEC socket
- connector type: 2× direct
- length: 15 m
- number of shieldings: 2
- packaging: 1 pc, blister

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

S31510 1/-/-/12

23 33 130 152 S31510

8 592920 107799 | 15 m | VHF/UHF



- connectors: IEC plug – IEC socket
- connector type: 1× direct, 1× angular
- length: 15 m
- number of shieldings: 2
- packaging: 1 pc, blister

S30200 1/-/-/20

23 33 130 250 S30200

8 592920 107737 | 2.5 m | VHF/UHF



- connectors: IEC plug – IEC socket
- connector type: 2× direct
- length: 2.5 m
- number of shieldings: 2
- packaging: 1 pc, blister

S30210 1/-/-/20

23 33 130 251 S30210

8 592920 107805 | 2.5 m | VHF/UHF



- connectors: IEC plug – IEC socket
- connector type: 1× direct, 1× angular
- length: 2.5 m
- number of shieldings: 2
- packaging: 1 pc, blister

S30300 1/-/-/20

23 33 130 350 S30300

8 592920 107744 | 3.5 m | VHF/UHF



- connectors: IEC plug – IEC socket
- connector type: 2× direct
- length: 3.5 m
- number of shieldings: 2
- packaging: 1 pc, blister

S30310 1/-/-/20

23 33 130 351 S30310

8 592920 107812 | 3.5 m | VHF/UHF



- connectors: IEC plug – IEC socket
- connector type: 1× direct, 1× angular
- length: 3.5 m
- number of shieldings: 2
- packaging: 1 pc, blister

S30700 1/-/-/20

23 33 130 750 S30700

8 592920 107768 | 7.5 m | VHF/UHF



- connectors: IEC plug – IEC socket
- connector type: 2× direct
- length: 7.5 m
- number of shieldings: 2
- packaging: 1 pc, blister

S30710 1/-/-/20

23 33 130 751 S30710

8 592920 107836 | 7.5 m | VHF/UHF



- connectors: IEC plug – IEC socket
- connector type: 1× direct, 1× angular
- length: 7.5 m
- number of shieldings: 2
- packaging: 1 pc, blister

S70203 1/-/-/20

23 33 170 010 S70203

8 592920 107638 | 1 m | 3.0 Version



- length: 1 m
- connectors: A plug – micro B plug
- using: charging/data
- USB version: 3.0
- packaging: 1 pc, blister

S70200 1/-/-/20

23 33 170 021 S70200

8 592920 107607 | 2 m | 2.0 Version



- length: 2 m
- connectors: A plug – A plug
- using: charging/data
- USB version: 2.0
- packaging: 1 pc, blister

S70201 1/-/-/20

23 33 170 022 S70201

8 592920 107614 | 2 m | 2.0 Version



- length: 2 m
- connectors: A plug – A socket
- using: charging/data
- USB version: 2.0
- packaging: 1 pc, blister

EMOS
A brand of legrand

www.emos.eu | Order Code Item Number | Packaging Type

S70202 | 1/-/-/20

23 33 170 023 | S70202

8 592920 107621



- length: 2 m
- connectors: A plug – B plug
- using: charging/data
- USB version: 2.0
- packaging: 1 pc, blister

Smartphone cables

- connection, data and charging cables for phone or tablet
- phone USB cables – micro USB, USB-C & Lightning (for iPhone)
- with 2.0 and 3.0 speed, selected models with Quick Charge
- length 1–2 m, flat & round, classic/reeled , various colours
- universal extension USB cables/splitters, 3 connector types

length: 1 m ▪ connectors: A plug – micro B plug ▪ using: charging/data ▪ USB version: 2.0 ▪ packaging: 1 pc, small box





MP3, MP4 | Tablet | Smartphone | Notebook | 1 m | Charging | USB data

8 592920 035856

SM7004W | 1/-/25/100

23 35 070 410 | SM7004W

length: 1 m ▪ connectors: A plug – micro B plug ▪ using: charging/data ▪ USB version: 2.0 ▪ packaging: 1 pc, small box





MP3, MP4 | Tablet | Smartphone | Notebook | 1 m | Charging | USB data

8 592920 035887

SM7004B | 1/-/25/100

23 35 070 420 | SM7004B

length: 1 m ▪ connectors: A plug – C plug ▪ using: charging/data ▪ USB version: 2.0 ▪ packaging: 1 pc, small box





Tablet | Smartphone | Notebook | 1 m | Charging | USB data

8 592920 068878

SM7025W | 1/-/25/100

23 35 072 500 | SM7025W

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

length: 1.5 m ▪ connectors: A plug – C plug ▪ using: charging/data ▪ USB version: 2.0 ▪ packaging: 1 pc, small box





Smartphone | Notebook | 1.5 m | Charging | USB data | Quick Charge

8 592920 090367

SM7026 1/-/25/100

23 35 076 011 SM7026

---

length: 1 m ▪ connectors: A plug – C plug ▪ using: charging/data ▪ USB version: 2.0 ▪ packaging: 1 pc, small box





Tablet | Smartphone | Notebook | 1 m | Charging | USB data

8 592920 068908

SM7025BL 1/-/25/100

23 35 072 501 SM7025BL

---

length: 1 m ▪ connectors: A plug – C plug ▪ using: charging/data ▪ USB version: 3.1 ▪ packaging: 1 pc, small box





Tablet | Smartphone | Notebook | 1 m | Charging | USB data

8 592920 039335

SM7021BL 1/-/25/100

23 35 072 100 SM7021BL

---

length: 1 m ▪ connectors: C plug – C plug ▪ using: charging/data ▪ USB version: 2.0 ▪ packaging: 1 pc, small box





Smartphone | Notebook | 1 m | Charging | USB data | Quick Charge

8 592920 118436

SM7027W 1/-/25/100

23 35 076 013 SM7027W

---

length: 1 m ▪ connectors: C plug – C plug ▪ using: charging/data ▪ USB version: 3.1 ▪ packaging: 1 pc, small box





Tablet | Smartphone | Notebook | 1 m | Charging | USB data

8 592920 039366

SM7022BL 1/-/25/50

23 35 072 200 SM7022BL

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

length: 1 m ▪ connectors: C plug – i16P plug ▪ using: charging/data ▪ USB version: 2.0 ▪ packaging: 1 pc, small box





Smartphone | Notebook | 1 m | Charging | USB data | MFi

8 592920 118443

SM7015W 1/-/25/100

23 35 076 014 SM7015W

length: 1 m ▪ connectors: A plug – i16P plug ▪ using: charging/data ▪ USB version: 2.0 ▪ packaging: 1 pc, small box





Tablet | Smartphone | Notebook | 1 m | Charging | USB data | MFi

8 592920 015575

SM7013W 1/-/25/100

23 35 071 310 SM7013W

connectors: micro B socket – C plug ▪ using: charging/data ▪ USB version: 2.0 ▪ packaging: 2 pcs, small box





Tablet | Smartphone | Notebook | Charging | USB data

8 592920 058053

SM7023 2/-/50/200

23 35 072 310 SM7023

connectors: 3.5 mm plug – 3.5 mm plug ▪ stereo ▪ length: 1.5 m ▪ packaging: 1 pc, small box





MP3, MP4 | Tablet | Smartphone | Notebook | 1.5 m | Audio

8 592920 085738

SM5001 1/-/-/120

23 35 050 010 SM5001

connectors: 3.5 mm plug – 3.5 mm socket ▪ stereo ▪ length: 2.5 m ▪ packaging: 1 pc, small box





MP3, MP4 | Tablet | Smartphone | Notebook | Audio

8 592920 085776

SM5102 1/-/-/120

23 35 050 020 SM5102

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

connectors: 3.5 mm plug – 3.5 mm plug ▪ stereo ▪ length: 3 m ▪ packaging: 1 pc, small box





MP3, MP4 | Tablet | Smartphone | Notebook | 3 m | Audio

8 592920 085752

SM5003 1/-/-/100

23 35 050 030 SM5003

---

connectors: 3.5 mm plug – 3.5 mm socket ▪ stereo ▪ length: 5 m ▪ packaging: 1 pc, small box





MP3, MP4 | Tablet | Smartphone | Notebook | 5 m | Audio

8 592920 085790

SM5105 1/-/-/100

23 35 050 050 SM5105

---

length: 0.15 m ▪ connectors: A socket – C plug with OTG function ▪ using: data ▪ USB version: 3.0 ▪ packaging: 1 pc, small box





Tablet | Smartphone | Notebook | 15 cm | USB data

8 592920 090374

SM7054 1/-/25/100

23 35 076 012 SM7054

---

length: 2 m ▪ connectors: A plug – mini B plug ▪ using: charging/data ▪ USB version: 2.0 ▪ packaging: 1 pc, small box





MP3, MP4 | Tablet | Smartphone | Notebook | 2 m | Charging | USB data

8 592920 085677

SM7009BL 1/-/-/120

23 35 076 020 SM7009BL

---

length: 2 m ▪ connectors: A plug – micro B plug ▪ using: charging/data ▪ USB version: 2.0 ▪ packaging: 1 pc, small box





MP3, MP4 | Tablet | Smartphone | Notebook | 2 m | Charging | USB data

8 592920 085714

SM7008BL 1/-/-/120

23 35 076 021 SM7008BL

Solid, flexible cables

Solid cables CYKY-J

- round copper cables for wiring: distribution board to socket
- installation into plaster or cable channel (wall-mounted)
- contain 3 conductors (strands) with 1.5 or 2.5 mm² diameter
- tough insulation, black colour
- length: 100 m

A3004 100/-/-/100

31 16 300 400

8 592920 117835



- conductor cross section: 3× 1.5 mm²
- designation: CYKY-J
- colour: black
- packaging: 100 m, foil

A3010 100/-/-/100

31 16 301 000

8 592920 117842



- conductor cross section: 3× 2.5 mm²
- designation: CYKY-J
- colour: black
- packaging: 100 m, foil


Flexible cables PVC CYSY

- round copper cables for interiors
- ideal for appliances such as fridges, washing machines etc.
- contain 3 conductors with 1 or 1.5 mm² diameter
- soft insulation, white colour
- length: 100 m

A3366 100/-/-/100

31 16 336 600

3 875000 262010




- conductor cross section: 3× 1.0 mm²
- designation: H05VV-F
- colour: white
- packaging: 100 m, foil

A3369 100/-/-/100

31 16 336 900

8 592920 117811



- conductor cross section: 3× 1.5 mm²
- designation: H05VV-F
- colour: white
- packaging: 100 m, foil

Solar cables

- designed for fixed photovoltaic installations in indoor and outdoor areas
- tinned OFC copper core
- double jacket made of cross-linked copolymer
- resistant to mechanical damage
- TÜV Rheinland certification

S9401 500/-/-/500

23 15 094 010 H1Z2Z2 BLACK 4MM

8 592920 118962



- conductor cross section: 1× 4.0 mm²
- designation: H1Z2Z2
- colour: black
- packaging: 500 m, wooden drum

S9402 500/-/-/500

23 15 094 020 H1Z2Z2 RED 4MM

8 592920 118979



- conductor cross section: 1× 4.0 mm²
- designation: H1Z2Z2
- colour: red
- packaging: 500 m, wooden drum

S9403 500/-/-/500

23 15 094 030 H1Z2Z2 BLACK 6MM

8 592920 118986



- conductor cross section: 1× 6.0 mm2
- designation: H1Z2Z2
- colour: black
- packaging: 500 m, wooden drum

S9404 500/-/-/500

23 15 094 040 H1Z2Z2 RED 6MM

8 592920 118993



- conductor cross section: 1× 6.0 mm2
- designation: H1Z2Z2
- colour: red
- packaging: 500 m, wooden drum

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

HF signal receiving components, antennas, small electronic, accessories



Antennas

CITY

City

- for installation in places with sufficient signal quality
- fitted with LTE filter for mobile interference suppression
- selected models include a 5G filter
- reception in horizontal or vertical polarisation

use: indoor ▪ suitable for reception from multiple transmitters ▪ signal reception: FM/DAB/DVB-T/T2 ▪ suitable for receiving Full HD broadcasts ▪ gain control ▪ LTE filter ▪ 5G filter ▪ polarization: horizontal or vertical ▪ frequency bands: FM/VHF/DAB/UHF ▪ frequency range: 47–230 MHz, 470–698 MHz ▪ reception angle: 360° ▪ power supply: DC USB 5 V/550 mA (included) ▪ connectors in the package: 1 pc ▪ connectors: IEC ▪ length of coaxial cable in the package: 1.5 m ▪ dimensions: 128 × 240 × 230 mm ▪ packaging: 1 pc, box





Digital TV | FM/DAB | USB 5 V/550 mA | Indoor | 1.5 m cable | City | 5G Filter | EASY TO INSTALL | dab+

8 592920 119389

J0701 | 1/-/-/10

27 02 031 000 | RING–C550

use: indoor ▪ suitable for reception from multiple transmitters ▪ signal reception: DAB/DVB-T/T2 ▪ suitable for receiving Full HD broadcasts ▪ LTE filter ▪ 5G filter ▪ polarization: horizontal or vertical ▪ frequency bands: VHF/UHF ▪ frequency range: 174–230 MHz, 470–698 MHz ▪ reception angle: 360° ▪ power supply: DC USB 5 V/550 mA (included) ▪ connectors in the package: 1 pc ▪ connectors: IEC ▪ length of coaxial cable in the package: 2 m ▪ dimensions: 8 × 345 × 77 mm ▪ packaging: 1 pc, box





Digital TV | DAB | USB 5 V/550 mA | Indoor | 2 m cable | City | 5G Filter | EASY TO INSTALL | dab+

8 592920 119631

J0703 | 1/-/-/20

27 02 033 000 | ARCH–C200

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

use: indoor ▪ suitable for reception from multiple transmitters ▪ signal reception: DAB/DVB-T/T2 ▪ suitable for receiving Full HD broadcasts ▪ gain control ▪ LTE filter ▪ 5G filter ▪ polarization: horizontal or vertical ▪ frequency bands: VHF/DAB/UHF ▪ frequency range: 174–230 MHz, 470–698 MHz ▪ reception angle: 360° ▪ power supply: DC USB 5 V/550 mA (included) ▪ connectors in the package: 1 pc ▪ connectors: IEC ▪ length of coaxial cable in the package: 1.5 m ▪ dimensions: 200 × 40 × 230 mm ▪ packaging: 1 pc, box





Digital TV | DAB | USB 5 V/550 mA | Indoor | 1.5 m cable | City | 5G Filter | EASY TO INSTALL | dab+

8 592920 119464

J0704 27 02 034 000

1/-/-/10 RING–C500

---

use: indoor ▪ suitable for reception from multiple transmitters ▪ signal reception: FM/DAB/DVB-T/T2 ▪ suitable for receiving Full HD broadcasts ▪ gain control ▪ LTE filter ▪ 5G filter ▪ polarization: horizontal or vertical ▪ frequency bands: FM/VHF/DAB/UHF ▪ frequency range: 87.5–230 MHz, 470–698 MHz ▪ reception angle: 180° ▪ power supply: DC USB 5 V/550 mA (included) ▪ connectors in the package: 1 pc ▪ connectors: IEC ▪ length of coaxial cable in the package: 1.5 m ▪ dimensions: 110 × 290 × 220 mm ▪ packaging: 1 pc, box





Digital TV | FM/DAB | USB 5 V/550 mA | Indoor | 1.5 m cable | City | 5G Filter | EASY TO INSTALL | dab+

8 592920 119716

J0705 27 02 035 000

1/-/-/10 ORBI–C200

---

use: indoor ▪ suitable for reception from multiple transmitters ▪ signal reception: FM/DAB/DVB-T/T2 ▪ suitable for receiving Full HD broadcasts ▪ LTE filter ▪ 5G filter ▪ polarization: horizontal or vertical ▪ frequency bands: FM/VHF/DAB/UHF ▪ frequency range: 87.5–230 MHz, 470–698 MHz ▪ reception angle: 360° ▪ power supply: USB 5 V/200 mA (included) ▪ connectors: IEC ▪ length of coaxial cable in the package: 1.85 m ▪ dimensions: 300 × 80 × 45 mm ▪ packaging: 1 pc, box





Digital TV | DAB | USB 5 V/200 mA | Indoor | 1.85 m cable | City | 5G Filter | EASY TO INSTALL | dab+

8 592920 119624

J0708 27 02 038 000

1/-/-/20 WOOD-C500

---

use: indoor ▪ suitable for reception from multiple transmitters ▪ signal reception: DAB/DVB-T/T2 ▪ suitable for receiving Full HD broadcasts ▪ LTE filter ▪ 5G filter ▪ polarization: horizontal or vertical ▪ frequency bands: VHF/UHF ▪ frequency range: 174–230 MHz, 470–698 MHz ▪ reception angle: 180° ▪ power supply: USB 5 V/200 mA (included) ▪ connectors: IEC ▪ dimensions: 1.3 × 228 × 128 mm ▪ packaging: 1 pc, box





Digital TV | DAB | USB 5 V/550 mA | Indoor | 1.85 m cable | City | 5G Filter | EASY TO INSTALL | dab+

8 592920 119976

J0709 27 02 039 000

1/-/-/22 LEAF–C600

EMOS
A brand of legrand

www.emos.eu | Order Code Item Number | Packaging Type

VILLAGE

Village

- for places with weaker signal (further from transmitter)
- fitted with LTE filter for mobile interference suppression
- can be installed in horizontal or vertical polarisation

---

use: indoor/outdoor ▪ suitable for long distance reception ▪ suitable for reception from multiple transmitters ▪ signal reception: DVB-T/T2 ▪ suitable for receiving Full HD broadcasts ▪ gain control ▪ LTE filter ▪ 5G filter ▪ polarization: horizontal or vertical ▪ frequency bands: UHF ▪ frequency range: 470–698 MHz ▪ reception angle: 90° ▪ power supply: DC USB 5 V/550 mA (included) ▪ connectors in the package: 2 pc ▪ connectors: F, IEC ▪ length of coaxial cable in the package: 8.5 m ▪ dimensions: 230 × 325 × 20 mm ▪ packaging: 1 pc, box





Digital TV | USB 5 V/550 mA | 8.5 m cable | Village | 5G Filter | EASY TO INSTALL

8 592920 119518

J0801 | 1/-/-/10
27 04 310 000 | DIO–V750

---

use: indoor/outdoor ▪ suitable for long distance reception ▪ suitable for reception from multiple transmitters ▪ signal reception: FM/DAB/DVB-T/T2 ▪ suitable for receiving Full HD broadcasts ▪ LTE filter ▪ 5G filter ▪ polarization: horizontal or vertical ▪ frequency bands: FM/VHF/DAB/UHF ▪ frequency range: 87.5–230 MHz, 470–698 MHz ▪ reception angle: 180° ▪ power supply: USB 5 V/200 mA (included) ▪ connectors in the package: 2 pc ▪ connectors: IEC ▪ length of coaxial cable in the package: 5 m ▪ dimensions: 230 × 80 × 120 mm ▪ packaging: 1 pc, box





Digital TV | FM/DAB | USB 5 V/200 mA | 5 m cable | Village | 5G Filter | EASY TO INSTALL | dab+

8 592920 118894

J0802 | 1/-/-/10
27 04 320 000 | CAMP-V400

---

use: indoor/outdoor ▪ suitable for long distance reception ▪ suitable for reception from multiple transmitters ▪ signal reception: DVB-T/T2 ▪ suitable for receiving Full HD broadcasts ▪ LTE filter ▪ 5G filter ▪ polarization: horizontal or vertical ▪ frequency bands: UHF ▪ frequency range: 470–698 MHz ▪ number of elements: 10 ▪ reception angle: 30°/40° ▪ power supply: DC USB 5 V/550 mA (included) ▪ connectors: F, IEC ▪ length of coaxial cable in the package: 5 m ▪ dimensions: 315 × 215 × 200 mm ▪ packaging: 1 pc, box





Digital TV | USB 5 V/550 mA | 5 m cable | Village | 5G Filter | EASY TO INSTALL

8 592920 091166

J0685 | 1/-/-/8
27 02 029 000 | EM-DIO3

---

use: indoor/outdoor ▪ suitable for long distance reception ▪ suitable for reception from multiple transmitters ▪ signal reception: FM/DAB/DVB-T/T2 ▪ suitable for receiving Full HD broadcasts ▪ LTE filter ▪ 5G filter ▪ polarization: horizontal or vertical ▪ frequency bands: FM/VHF/UHF ▪ frequency range: 47–698 MHz ▪ reception angle: 360° ▪ power supply: USB 5 V/200 mA (included) ▪ connectors: IEC ▪ length of coaxial cable in the package: 5 m ▪ dimensions: 300 × 40 mm ▪ packaging: 1 pc, box





Digital TV | FM/DAB | USB 5 V/200 mA | 5 m cable | Village | 5G Filter | EASY TO INSTALL | dab+

8 592920 119709

J0803 | 1/-/-/2
27 04 330 000 | MOON-V900

EMOS
A brand of legrand

www.emos.eu

Order Code / Item Number | Packaging Type

use: indoor/outdoor ▪ suitable for long distance reception ▪ suitable for reception from multiple transmitters ▪ signal reception: DAB/DVB-T/T2 ▪ suitable for receiving Full HD broadcasts ▪ gain control ▪ LTE filter ▪ 5G filter ▪ polarization: horizontal or vertical ▪ frequency bands: VHF/DAB/UHF ▪ frequency range: 174–230 MHz, 470–698 MHz ▪ reception angle: 180° ▪ power supply: DC USB 5 V/550 mA (included) ▪ connectors in the package: 2 pc ▪ connectors: F, IEC ▪ length of coaxial cable in the package: 8.5 m ▪ dimensions: 40 × 130 × 320 mm ▪ packaging: 1 pc, box





Digital TV | DAB | USB 5 V/550 mA | 8.5 m cable | Village | Filter | EASY TO INSTALL | dab+


8 592920 119525

J0804 | 1/-/-/2

27 04 340 000 | FLIPP–V200

---

use: outdoor ▪ suitable for long distance reception ▪ signal reception: DVB-T/T2 ▪ suitable for receiving Full HD broadcasts ▪ LTE filter ▪ 5G filter ▪ polarization: horizontal or vertical ▪ frequency bands: UHF ▪ frequency range: 470–698 MHz ▪ number of elements: 20 ▪ reception angle: 30°/40° ▪ power supply: DC 5–12 V/100 mA (included) ▪ connectors in the package: 1 pc ▪ connectors: F connector ▪ length of coaxial cable in the package: 10 m ▪ dimensions: 400 × 39 × 330 mm ▪ packaging: 1 pc, box





Digital TV | 5–12 V/ 100 mA | 10 m cable | Village | Filter | dab+

8 592920 125441

J0806 | 1/-/-/1

27 04 350 000 | FISH–V700

PROFI

Profi

- for places with low signal strength (far away from transmitter)
- selected models include a 5G filter
- reception in horizontal or vertical polarisation

- use: outdoor YAGI
- suitable for long distance reception
- signal reception: DVB-T/T2
- suitable for receiving Full HD broadcasts
- LTE filter
- 5G filter
- polarization: horizontal or vertical
- frequency bands: UHF
- frequency range: 470–698 MHz

- number of elements: 16
- reception angle: 38°/80°
- connectors in the package: 1 pc
- connectors: F connector
- dimensions: 790 × 510 × 440 mm
- packaging: 1 pc, box





Digital TV | UHF | 5G Protected

Profi | Filter | EASY TO INSTALL


8 592920 119723

J0906 | 1/-/-/6

27 04 560 000 | EM-P117

- use: outdoor YAGI
- suitable for long distance reception
- signal reception: DVB-T/T2
- suitable for receiving Full HD broadcasts
- LTE filter
- 5G filter
- polarization: horizontal or vertical
- frequency bands: UHF
- frequency range: 470–698 MHz

- number of elements: 27
- reception angle: 38°/80°
- connectors in the package: 1 pc
- connectors: F connector
- dimensions: 1060 × 580 × 600 mm
- packaging: 1 pc, box





Digital TV | UHF | 5G Protected

Profi | Filter | EASY TO INSTALL

8 592920 119730

J0907 | 1/-/-/6

27 04 570 000 | EM-P127

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- use: outdoor
- suitable for long distance reception
- suitable for reception from multiple transmitters
- signal reception: DVB-T/T2
- suitable for receiving Full HD broadcasts
- LTE filter
- 5G filter
- polarization: horizontal or vertical
- frequency bands: UHF
- frequency range: 470–698 MHz
- number of elements: 29
- reception angle: 38°/80°
- power supply: passive
- connectors: F connector
- dimensions: 1 150 × 520 × 640 mm
- packaging: 1 pc, box




Digital TV | UHF | 5G Protected | Profi | 5G Filter | EASY TO INSTALL

8 592920 104927

J0690 27 04 039 000

1/-/-/4 EM-29U5G

- use: outdoor
- suitable for long distance reception
- signal reception: DVB-T/T2
- suitable for receiving Full HD broadcasts
- LTE filter
- 5G filter: no
- polarization: horizontal or vertical
- frequency bands: UHF
- frequency range: 470–790 MHz
- number of elements: 28
- reception angle: 45°/40°
- power supply: passive
- connectors: F connector
- dimensions: 1035 × 360 × 340 mm
- packaging: 1 pc, box





Digital TV | UHF | LTE 790 MHz | Profi

8 595025 399748

J0669 27 04 280 010

1/-/-/1 EM-2845

- use: outdoor
- suitable for long distance reception
- signal reception: DVB-T/T2
- suitable for receiving Full HD broadcasts
- LTE filter
- 5G filter: no
- polarization: horizontal or vertical
- frequency bands: UHF
- frequency range: 470–790 MHz
- number of elements: 16
- reception angle: 34°/26°
- power supply: passive
- connectors: F connector
- dimensions: 1000 × 360 × 340 mm
- packaging: 1 pc, header card


Digital TV | UHF | LTE 790 MHz | Profi

8 592920 055533

J0680 27 04 030 000

1/-/-/1 EM-116

- use: outdoor logaritmic-periodical
- suitable for long distance reception
- suitable for reception from multiple transmitters
- signal reception: DAB/DVB-T/T2
- suitable for receiving Full HD broadcasts
- LTE filter
- 5G filter: no
- polarization: horizontal or vertical
- frequency bands: VHF/DAB/UHF
- frequency range: 170–790 MHz
- reception angle: 30°/40°
- power supply: 12 V/100 mA (included)
- connectors: F connector
- dimensions: 178 × 560 × 780 mm
- packaging: 1 pc, box





Digital TV | VHF/UHF | DAB | 12 V/100 mA | LTE 790 MHz | Profi | DAB+

8 595025 394118

J0665 27 03 105 000

1/-/-/1 EM-025

- use: outdoor logaritmic-periodical
- suitable for long distance reception
- suitable for reception from multiple transmitters
- signal reception: DAB/DVB-T/T2
- suitable for receiving Full HD broadcasts
- LTE filter
- 5G filter: no
- polarization: horizontal or vertical
- frequency bands: VHF/DAB/UHF
- frequency range: 170–790 MHz
- reception angle: 30°/40°
- power supply: 12 V/100 mA (included)
- connectors: F connector
- dimensions: 178 × 560 × 780 mm
- packaging: 1 pc, box




Digital TV | VHF/UHF | DAB | 12 V/100 mA | LTE 790 MHz | Profi | DAB+

8 595025 394125

J0666 27 03 106 000

1/-/-/1 EM-030

TV signal receivers

TV signal receivers

- certified set-top boxes
- for reception of digital terrestrial DVB-T2 broadcasting
- full support for DVB-T2 in HEVC and H.265 standard
- numerous outlets and plugs: USB, HDMI, SCART, IEC
- recording and playing programmes to/from USB
- timeshift, parent lock, remote control with long range
- multilingual menu, automatic and manual tuning

DVB-T/DVB-T2 : DVB-T2 ▪ connectors: 1× USB 2.0, 1× HDMI 1.4, 1× miniUSB, 1× IEC, 1× SCART ▪ tuner frequency range: 174–230MHz, 474–860 MHz ▪ input level of signal: -75.2 to -23.9 dBm ▪ update via USB: yes ▪ PVR recording function: yes, via USB up to 1 TB ▪ recording format: TS free to be reproduced ▪ file format on USB device: FAT16, FAT32, NTFS ▪ EPG program guide: 7 days ▪ power supply: 220–240 V AC 50/60 Hz ▪ consumption (on/stand-by): 5 W/<1 W ▪ dimensions: 120 × 75 × 25 mm ▪ packaging: 1 pc, box





FULL HD Resolution 1 080p | USB PVR | HDMI | DVB T2 TERRESTRIAL

8 592920 083987

J6014	1/-/-/20
25 20 236 400	EM190-S HD

Accessories

J50988	1/-/-/200
25 20 900 088	D.O. EM190 / EM190S

8 592920 084786



designed for: EM190/EM190S/EM190L ▪ learning function ▪ code remembered after removing the battery ▪ range: 15 m ▪ power source: 2× AAA ▪ dimensions: 175 × 45 × 15 mm ▪ weight: 100 g ▪ packaging: 1 pc, PVC packet

J50989	1/-/-/220
25 20 900 089	D.O. EM190/EM190S S

8 592920 087954




designed for: EM190/EM190S/EM190L ▪ learning function ▪ code remembered after removing the battery ▪ range: 15 m ▪ power source: 2× AAA ▪ dimensions: 170 × 55 × 20 mm ▪ weight: 100 g ▪ packaging: 1 pc, PVC packet

Wall sockets

- homologated components for professionals and DIY
- quality materials ensure outstanding technical properties
- designed for processing and transmitting digital signal

- version: terminal
- designation: TV (2) + R (2) + SAT (3)
- terminal attenuation: 3 dB
- connector type: IEC + F (female)
- dimensions: 26 × 60 × 60 mm
- packaging: 1 pc, box






3 dB | TV/R/SAT

8 595025 301802

J0240 | 1/-/-/60

25 01 000 300 | EU3303

- version: terminal
- designation: TV (2) + R (2) + SAT (3)
- terminal attenuation: 3 dB
- connector type: IEC + F (female)
- dimensions: 26 × 60 × 60 mm
- packaging: 1 pc, box






3 dB | TV/R/SAT

8 595025 378460

J0240E | 1/-/-/100

25 01 000 330 | EU3303E

- version: loop-through
- designation: TV (7) + R (7) + SAT (10)
- terminal attenuation: 7 dB
- insertion loss: 3 dB
- connector type: IEC + F (female)
- dimensions: 26 × 60 × 60 mm
- packaging: 1 pc, box





7 dB | TV/R/SAT

8 595025 389381

J0260 | 1/-/-/60

25 01 000 400 | EU3407

- version: terminal
- designation: TV (3.5) + R (4)
- terminal attenuation: 3 dB
- connector type: IEC
- dimensions: 26 × 60 × 60 mm
- packaging: 1 pc, box





3 dB | TV/R

8 595025 301727

J0200 | 1/-/-/60

25 01 000 100 | EU3503

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- version: terminal
- designation: TV (1) + R (2)
- terminal attenuation: 1 dB
- connector type: IEC
- dimensions: 26 × 60 × 60 mm
- packaging: 1 pc, box






1 dB | TV/R

8 595025 301741

J0203 | 1/-/-/60

25 01 000 200 | EU3601P

- version: loop-through
- designation: TV (7) + R (7)
- terminal attenuation: 7 dB
- insertion loss: 3 dB
- connector type: IEC
- dimensions: 26 × 60 × 60 mm
- packaging: 1 pc, box





7 dB | TV/R

8 595025 311955

J0220J | 1/-/-/60

25 01 100 100 | EU3607

- version: loop-through
- designation: TV (14) + R (14)
- terminal attenuation: 14 dB
- insertion loss: 1.5 dB
- connector type: IEC
- dimensions: 26 × 60 × 60 mm
- packaging: 1 pc, box





14 dB | TV/R

8 595025 301734

J0222 | 1/-/-/60

25 01 100 300 | EU3614

Accessories

Combiners, splitters

- merge terrestrial and satellite broadcasting signal
- or terrestrial signal from 2 antennas
- divided by enclosure rating: indoor (IP20) or outdoor (IP53)
- split signal to up to 4 outputs (F or IEC connectors)
- selected types feature power pass for DC voltage

- product: signal combiner SAT+TV
- inputs: 2
- outputs: 1
- connectors: IEC
- frequency range: 0.1–1 000 MHz
- insertion loss: 3.5 dB
- power pass
- body material: zinc casting
- working temperature: -10–+65 °C

- using: TV + R
- IP rating: IP20
- dimensions: 17 × 32 × 23 mm
- packaging: 1 pc, PVC packet





0.1–1 000 MHz | 3.5 dB | A Class

8 595025 316370

J0197 | 1/-/10/200

25 03 000 100 | EU2491

- product: signal combiner SAT+TV
- inputs: 2
- outputs: 1
- suitable for merging of satellite signals
- connectors: F female
- frequency range: 5–2 400 MHz
- insertion loss: 3.5 dB
- power pass: yes, SAT
- body material: zinc casting

- working temperature: -10–+65 °C
- using: TV + R + SAT
- IP rating: IP53
- dimensions: 25 × 35 × 20 mm
- packaging: 1 pc, PVC packet





5–2 400 MHz | 3 dB TER/ 2 dB SAT | A Class

8 592920 040928

J0198 | 1/-/10/200

25 03 000 400 | TV+SAT COMBINER

- product: splitter
- number of inputs: 1
- number of outputs: 2
- connectors: IEC
- frequency range: 0.1–1 000 MHz
- insertion loss: 3.5 dB
- power pass
- hub body material: zinc casting
- working temperature: -10–+65 °C

- using: TV + R
- IP rating: IP20
- dimensions: 17 × 32 × 23 mm
- packaging: 1 pc, header card





0.1–1 000 MHz | 3.5 dB | A Class

8 595025 316387

J0199 | 1/-/10/200

25 04 200 100 | EU2501

EMOS A brand of legrand | www.emos.eu | Order Code Item Number | Packaging Type

- number of inputs: 1
- number of outputs: 2
- connectors: F female
- frequency range: 5–2 400 MHz
- insertion loss: 3.7 dB
- power pass: yes, 2×
- hub body material: zinc casting
- working temperature: -10–+65 °C
- using: TV + R
- IP rating: IP20
- dimensions: 25 × 35 × 20 mm
- packaging: 1 pc, box





5–2 400 MHz | 3.7 dB | A Class

8 592920 090695

J0102 | 1/-/10/200

25 04 500 110 | EM2342

- number of inputs: 1
- number of outputs: 3
- connectors: F female
- frequency range: 5–2 400 MHz
- insertion loss: 6 dB
- power pass: yes, 3×
- hub body material: zinc casting
- working temperature: -10–+65 °C
- using: TV + R + SAT
- IP rating: IP20
- dimensions: 20 × 56 × 25 mm
- packaging: 1 pc, box





5–2 400 MHz | 6 dB | A Class

8 592920 090701

J0103 | 1/-/10/200

25 04 600 110 | EM2343

- number of inputs: 1
- number of outputs: 4
- connectors: F female
- frequency range: 5–2 400 MHz
- insertion loss: 7.5 dB
- power pass: yes, 4×
- hub body material: zinc casting
- working temperature: -10–+65 °C
- using: TV + R + SAT
- IP rating: IP20
- dimensions: 20 × 56 × 25 mm
- packaging: 1 pc, box





5–2 400 MHz | 7.5 dB | A Class

8 592920 090718

J0104 | 1/-/10/200

25 04 700 110 | EM2344

Amplifiers, preamplifiers, LTE filters

- amplification: 20–30 dB, F connectors (in & out), IP45
- built-in LTE filter 790 MHz suppresses mobile interference
- LTE filter can also be purchased extra (for older antennas)

---

product: antenna preamplifier ▪ inputs: 1 ▪ number of outputs: 1 ▪ frequency range: 5–260 MHz, 470–790 MHz ▪ gain: 25 dB ▪ noise figure: <3.0 dB ▪ connectors: F female ▪ IP rating: IP45 ▪ hole spacing: 27 mm ▪ power supply: 12 V/50 mA ▪ dimensions: 12 × 44 × 40 mm ▪ packaging: 1 pc, PVC packet





25 dB | IP45 | DVB T2 TERRESTRIAL | Lte

8 595025 386748

J5802 | 1/-/10/200

25 07 100 600 | BEN-25

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

product: antenna preamplifier ▪ inputs: 1 ▪ number of outputs: 1 ▪ frequency range: 5–260 MHz, 470–790 MHz ▪ gain: 30 dB ▪ noise figure: <3.0 dB ▪ connectors: F female ▪ IP rating: IP45 ▪ hole spacing: 27 mm ▪ power supply: 12 V/50 mA ▪ dimensions: 12 × 44 × 40 mm ▪ packaging: 1 pc, PVC packet





30 dB | IP45 | DVB T2 TERRESTRIAL | Lte

8 595025 386755

J5803 | 1/-/10/200

25 07 100 700 | BEN-30

---

product: shielded line amplifier ▪ inputs: 1 ▪ number of outputs: 1 ▪ frequency range: 470–790 MHz ▪ stop band: 790–2 200 MHz ▪ gain: 20 dB ▪ noise figure: <2.0 dB ▪ maximum output signal level: 104 dBµV ▪ connectors: F female ▪ IP rating: IP45 ▪ power supply: 5–12 V DC, 65 mA ▪ dimensions: 20 × 42 mm ▪ packaging: 1 pc, header card





20 dB | IP45 | DVB T2 TERRESTRIAL | Lte

8 592920 040942

J5709 | 1/-/10/200

25 08 000 810 | AMP-20/5-12

---

product: shielded line amplifier ▪ inputs: 1 ▪ number of outputs: 1 ▪ frequency range: 470–790 MHz ▪ stop band: 790–2 200 MHz ▪ gain: 30 dB ▪ noise figure: <2.0 dB ▪ maximum output signal level: 104 dBµV ▪ connectors: F female ▪ IP rating: IP45 ▪ power supply: 5–12 V DC, 65 mA ▪ dimensions: 20 × 42 mm ▪ packaging: 1 pc, header card





30 dB | IP45 | DVB T2 TERRESTRIAL | Lte

8 592920 040966

J5710 | 1/-/10/200

25 08 000 900 | AMP-30 5–12V

---

product: broadband home amplifier ▪ inputs: 1 ▪ number of outputs: 2 ▪ frequency range: 47–230 MHz, 470–698 MHz ▪ stop band: 400–470 MHz, 699–2 200 MHz ▪ gain: 25 dB ▪ gain control: 0–15 dB ▪ noise figure: <3.0 dB ▪ maximum output signal level: 108 dBµV ▪ connectors: F female ▪ IP rating: IP20 ▪ power supply: 230 V +/-10 %, 50/60 Hz, 3 W ▪ dimensions: 105 × 135 × 40 mm ▪ packaging: 1 pc, box





47–230 MHz
470–698 MHz | 10–25 dB | 230 V/50 Hz | 5G Filter

8 592920 084854

J0400 | 1/-/-/40

25 06 000 800 | EM440

---

product: 5G filter ▪ inputs: 1 ▪ number of outputs: 1 ▪ frequency range: 0.3–694 MHz ▪ stop band: 700–2 400 MHz ▪ attenuation in the stop band: >40 dB ▪ connectors: F female ▪ IP rating: IP20 ▪ power pass: yes, 300 mA ▪ dimensions: 16 × 40 mm ▪ packaging: 1 pc, box





0.3–694 MHz | > 40 dB | 5G Protected

8 592920 090725

J5711 | 1/-/10/200

25 08 100 100 | EM694F

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

product: 5G filter ▪ inputs: 1 ▪ number of outputs: 1 ▪ frequency range: 0.3–694 MHz ▪ stop band: 700–2 400 MHz ▪ attenuation in the stop band: >40 dB ▪ connectors: IEC connector ▪ IP rating: IP20 ▪ power pass: yes, 300 mA ▪ dimensions: 16 × 68 mm ▪ packaging: 1 pc, box





0.3–694 MHz | > 40 dB | 5G Protected

8 592920 090732

J5712 | 1/-/10/200
25 08 100 200 | EM694IEC

Power supply units for antennas

- for powering antenna preamps and splitters, with duplexer
- output voltage: 12 V/300 mA or 12 V/100 mA, F/IEC connector
- power cable length: 1.5 m

- version: SMPS switched
- designed for: power supply of antenna preamplifiers
- power supply: 110–230 V
- output voltage: 12 V
- output current: 300 mA
- ECO design
- standby power consumption: <0.3 W
- power supply shunt
- input connector of the power injector: F connector
- output connector of the power injector: IEC
- power cable: 1.5 m
- dimensions: 70 × 57 × 23 mm
- packaging: 1 pc, box





47–862 MHz | 12 V/300 mA

8 592920 017647

J5810 | 1/-/-/80
17 02 010 035 | EM-12SP

- version: SMPS switched
- designed for: power supply of antenna preamplifiers
- power supply: 110–230 V
- output voltage: 12 V
- output current: 100 mA
- ECO design
- standby power consumption: <0.3 W
- power supply shunt
- input connector of the power injector: F connector
- output connector of the power injector: F connector
- power cable: 1.5 m
- dimensions: 24 × 68 × 35 mm
- packaging: 1 pc, box





47–862 MHz | 12 V/100 mA

8 592920 006580

J58133 | 1/-/-/70
17 02 010 034 | BEN-712A

Holders for satellite, terrestrial antennas

- mounts for TV, Internet and parabolic satellite antennas
- for mounting onto a wall, mast or balcony railing
- length: 250–500 mm, diameter: 28–40 mm, height: 150–630 mm
- galvanised surface protects against rust

J60030 1/-/-/1

25 21 000 030 V30G

8 595025 325037



holder type: holder with crossing for the antennas ▪ length from the base: 250 mm ▪ finishing of the surface: galvanization ▪ pipe diameter: 28 mm ▪ height: 630 mm ▪ mounting adapted to: wall ▪ packaging: 1 pc, no packaging

J60110 1/-/-/1

25 21 000 110 V110G

8 595025 344823



holder type: holder basic ▪ length from the base: 250 mm ▪ finishing of the surface: galvanization ▪ pipe diameter: 28 mm ▪ height: 130 mm ▪ mounting adapted to: wall ▪ packaging: 1 pc, no packaging

J60120 1/-/-/1

25 21 000 120 V120G

8 595025 325068



holder type: holder with crossing ▪ length from the base: 250 mm ▪ finishing of the surface: galvanization ▪ pipe diameter: 40 mm ▪ height: 150 mm ▪ mounting adapted to: wall ▪ packaging: 1 pc, no packaging

J60130 1/-/-/1

25 21 000 130 V130G

8 595025 325075



holder type: holder with crossing ▪ length from the base: 350 mm ▪ finishing of the surface: galvanization ▪ pipe diameter: 40 mm ▪ height: 150 mm ▪ mounting adapted to: wall ▪ packaging: 1 pc, no packaging

J60140 1/-/-/1

25 21 000 140 V140G

8 595025 325082



holder type: holder with crossing ▪ length from the base: 500 mm ▪ finishing of the surface: galvanization ▪ pipe diameter: 40 mm ▪ height: 150 mm ▪ mounting adapted to: wall ▪ packaging: 1 pc, no packaging

J60170 1/-/-/1

25 21 000 170 V170G

8 595025 325099



holder type: pole holder ▪ length from the base: 350 mm ▪ finishing of the surface: galvanization ▪ pipe diameter: 40 mm ▪ height: 150 mm ▪ mounting adapted to: mast ▪ packaging: 1 pc, no packaging

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

ZigBee GoSmart

EMOS GoSmart

- To expand the smart home with additional sensors and products
- Allows automation settings for added sensors and products
- Communication protocols Wi-Fi/Zigbee 3.0/BLE/SigMesh
- Compatibility with EMOS GoSmart products and TUYA devices

Powered by

Works with Amazon Alexa Google Assistant

Download on the App Store

GET IT ON Google Play

- product: IP gateway
- connectivity: 2.4 GHz WIFI
- maximum number of connected clients: 50
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi/Zigbee 3.0/BLE/SigMesh
- pairing: automatic, manual
- use: automation
- number of control buttons: 1
- power supply: 5 V DC/1.0 A
- supported OS: Android, iOS

ZigBee BLE SigMesh Wi Fi





8 592920 118627

H5001	1/-/-/120
30 69 050 010	IP-1000Z

- product: ZigBee repeater
- connectivity: 2.4 GHz WIFI
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Zigbee 3.0
- pairing: automatic, manual
- use: automation
- power supply: 5 V DC/1.0 A
- supported OS: Android, iOS

ZigBee 3.0





8 592920 128725

H5022	1/-/-/60
30 69 052 030	IP-2213Z

EMOS
A brand of legrand

www.emos.eu | Order Code Item Number | Packaging Type



Videophones, doorbells

Home videophones, sets

Home videophones

- part of modern household security
- kit consists of camera and monitor with intuitive controls
- expandable with extra inputs, screens or CCTV cameras
- gate control from inside the house, touch/mechanical keys
- higher class videophones also w/ photographic memory/Wi-Fi
- white or infrared camera illumination ensures night vision
- colour display, up to 16 ringtones, power supply included

product: video set ▪ screen size: 7" ▪ possibility to record ▪ lock control ▪ gate control ▪ intercom ▪ power supply for the screen: 12 V DC (included) ▪ optional connection of CCTV camera ▪ monitor size: 175 × 125× 20 mm ▪ dimensions of the camera unit: 135 × 50 × 25 mm ▪ camera viewing angle: 160° ▪ packaging: 1 pc, box





FULL HD Resolution 1 080p | Video guard | Snapshot | 160° | Door/Gate control | Infrared night vision | 7" LCD colour | SD Card slot | 4+2 Wires | EASY TO INSTALL

8 592920 090329

H3010	1/-/-/6
30 10 003 010	EM-10AHD

screen size: 7" ▪ lock and gate control ▪ intercom ▪ power supply for the monitor: 12 V DC (included) ▪ recommended camera unit: H3016, H3017, H3018 ▪ monitor size: 175 × 125× 20 mm ▪ packaging: 1 pc, box





FULL HD Resolution 1 080p | Video guard | Snapshot | Door/Gate control | 7" LCD colour | SD Record | 4+2 Wires | EASY TO INSTALL

8 592920 091326

H3015	1/-/-/21
30 10 003 015	EM-10AHD

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

product: camera unit with RFID ▪ number of buttons on the camera unit: 1 ▪ power supply: via monitor ▪ number of wiress (monitor/lock/power supply): 4/2/0 ▪ dimensions of the camera unit: 131 × 47 × 18 mm ▪ IP rating: IP44 ▪ camera viewing angle: 160° ▪ door lock control ▪ installation: surface ▪ packaging: 1 pc, box





RFID | 160° | Door control | Night vision

8 592920 091869

H3016 1/-/-/20

30 10 003 016 EM-10AHD RF-1

---

product: camera unit with RFID ▪ number of buttons on the camera unit: 2 ▪ power supply: via monitor ▪ number of wiress (monitor/lock/power supply): 2× 4/2/0 ▪ dimensions of the camera unit: 131 × 47 × 18 mm ▪ IP rating: IP44 ▪ camera viewing angle: 160° ▪ door lock control ▪ installation: surface ▪ packaging: 1 pc, box





RFID | 160° | Door control | Night vision

8 592920 091890

H3017 1/-/-/20

30 10 003 017 EM-10AHD RF-2

---

product: camera unit with RFID ▪ number of buttons on the camera unit: 4 ▪ power supply: via monitor ▪ number of wiress (monitor/lock/power supply): 4× 4/2/0 ▪ dimensions of the camera unit: 131 × 47 × 18 mm ▪ IP rating: IP44 ▪ camera viewing angle: 160° ▪ door lock control ▪ installation: surface ▪ packaging: 1 pc, box





RFID | 160° | Door control | Night vision

8 592920 091920

H3018 1/-/-/20

30 10 003 018 EM-10AHD RF-4

---

product: camera unit ▪ number of buttons on the camera unit: 1 ▪ power supply: via monitor ▪ number of wiress (monitor/lock/power supply): 4+0+0 ▪ dimensions of the camera unit: 49 × 132 × 20 mm ▪ IP rating: IP65 ▪ camera viewing angle: 160° horizontally a 130° vertically ▪ door lock control ▪ installation: surface ▪ packaging: 1 pc, box





RFID | 160° | Door control | Night vision

8 592920 117521

H3019 1/-/-/20

30 10 003 019 EM-10AHD KEY-1

---

product: video set ▪ screen size: 7" ▪ lock control ▪ gate control ▪ power supply for the screen: 14.5 V DC (includedí) ▪ monitor size: 152 × 215 × 18 mm ▪ dimensions of the camera unit: 141 × 63 × 40 mm ▪ camera viewing angle: 80° ▪ packaging: 1 pc, box





SD Resolution 480p | Night vision | Door/Gate control | 7" LCD colour | Hands free | 2 Wires | 80° | 2 WIRES | EASY TO INSTALL

8 592920 091463

H2050 1/-/-/8

30 10 002 050 H2050

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

product: video set ▪ screen size: 7" ▪ lock control ▪ gate control ▪ intercom ▪ power supply for the screen: 12 V DC (included) ▪ optional connection of CCTV camera ▪ monitor size: 233 × 23 × 160 mm ▪ dimensions of the camera unit: 64 × 46 × 145 mm ▪ camera viewing angle: 80° ▪ packaging: 1 pc, box





HD Resolution 720p | CCTV camera | Monitor intercom | Door/Gate control | Infrared night vision | 7" LCD colour | Hands free | 4+2 Wires | 80° | EASY TO INSTALL

8 592920 056929

H2017 | 1/-/-/6
30 10 002 017 | EM-07HD

---

product: sudio porter set ▪ lock and gate control: door lock control ▪ power supply: 12 V DC (included) ▪ number of wires (monitor/lock/gate): 2+2+0 ▪ dimensions of the door station: 35 × 65 × 145 mm ▪ handset dimension: 75 × 93 × 225 mm ▪ packaging: 1 pc, box





Water resistance | Impact resistance | Door control | 2+2 Wires

8 592920 010198

H1085 | 1/-/-/10
30 10 000 291 | H1085

---

product: sudio porter set ▪ lock and gate control: door lock control ▪ power supply: 12 V DC ▪ number of wires (monitor/lock/gate): 3+2+0 ▪ dimensions of the door station: 116 × 199 × 40 mm ▪ handset dimension: 75 × 93 × 225 mm ▪ packaging: 1 pc, box





Water resistance | Impact resistance | Door control | 3+2 Wires

6 934738 480312

H1086 | 1/-/-/10
30 10 000 292 | H1086

---

product: additional camera unit ▪ number of buttons on the camera unit: 1 ▪ power supply: via monitor ▪ number of wiress (monitor/lock/power supply): 4/2/0 ▪ dimensions of the camera unit: 64 × 46 × 145 mm ▪ IP rating: IP44 ▪ camera viewing angle: 80° ▪ door lock control ▪ installation: surface ▪ packaging: 1 pc, box



Water resistance | LED White

8 592920 106655

H1141 | 1/-/-/20
30 10 001 151 | EM-07HD C-01

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

Videophones and video doorbells GoSmart

EMOS GoSmart

- Perfect access control for commercial and private properties
- Unusual activity alerts sent to mobile devices
- Two-way communication with the visitor without opening the door
- Automatic video and audio recording when motion is detected
- Night vision for perfect images in all lighting conditions
- Compatibility with EMOS GoSmart products and TUYA devices
- Voice control with Google Assistant and Amazon Alexa

Powered by

Works with Amazon Alexa Google Assistant

Download on the App Store

GET IT ON Google Play

---

product: doorphone set with WiFi ▪ screen size: 7" ▪ possibility to record ▪ lock control ▪ gate control ▪ intercom ▪ power supply for the screen: 12 V DC (included) ▪ optional connection of CCTV camera ▪ monitor size: 175 × 118 × 25 mm ▪ dimensions of the camera unit: 142 × 44 × 21 mm ▪ camera viewing angle: 160° ▪ packaging: 1 pc, box ▪ supported OS: Android, iOS ▪ compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife, open system ▪ protocol: Wi-fi ▪ connectivity: 2.4 GHz WIFI ▪ voice communication: two-way





Wi Fi | FULL HD Resolution 1 080p | Night vision | 160° | Door/Gate control | 2 way audio | IR CUT Day/Night | Motion detection | Video guard | Touch screen

8 592920 129678

H4020 1/-/-/4

30 10 040 200 IP-750A

---

product: video phone ▪ screen size: 7 ▪ lock and gate control ▪ intercom ▪ power supply for the monitor: 12 V DC (included) ▪ recommended camera unit: H3016, H3017, H3018, H3019 ▪ monitor size: 145 × 205 × 12 mm ▪ packaging: 1 pc, box





Wi Fi | FULL HD Resolution 1 080p | Night vision | Door/Gate control | 2 way audio | Touch screen | Monitor intercom | SD Micro SD max. 128 Gb | Cloud storage

8 592920 129692

H4021 1/-/-/6

30 10 040 210 IP-750B

---

lock control ▪ additional indoor bell ▪ camera viewing angle: 110° ▪ camera resolution: 1 920 × 1 080 ▪ motion detection ▪ IR CUT ▪ siren ▪ supported OS: Android, iOS ▪ compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife, open system ▪ protocol: Wi-Fi ▪ transmission frequency: 2.4 GHz WIFI ▪ SD card storage ▪ cloud storage ▪ anti-theft protection ▪ control by voice assistants ▪ voice communication: two-way ▪ notifications to the mobile app ▪ WebRTC function





Wi Fi | Rechargeable 4 000 mAh | FULL HD Resolution 1 080p | Night vision | 110° | 2 way audio | IR CUT Day/Night | Siren 85 dB | Door control | Solar charging

8 592920 117545

H4030 1/-/-/8

30 10 040 300 IP-09D DC

---

lock control ▪ additional indoor bell ▪ camera viewing angle: 110° ▪ camera resolution: 1 920 × 1 080 ▪ motion detection ▪ IR CUT ▪ siren ▪ supported OS: Android, iOS ▪ compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife, open system ▪ protocol: Wi-Fi ▪ transmission frequency: 2.4 GHz WIFI ▪ SD card storage ▪ cloud storage ▪ anti-theft protection ▪ control by voice assistants ▪ voice communication: two-way ▪ notifications to the mobile app ▪ WebRTC function





Wi Fi | FULL HD Resolution 1 080p | Night vision | 110° | Motion detection | 2 way audio | IR CUT Day/Night | Siren 85 dB | Door control | PIR sensor

8 592920 117569

H4031 1/-/-/12

30 10 040 310 IP-09C

EMOS A brand of legrand | www.emos.eu | Order Code Item Number | Packaging Type

additional indoor bell ▪ camera viewing angle: 130° ▪ camera resolution: 1 920 × 1 080 ▪ motion detection ▪ IR CUT ▪ supported OS: Android, iOS ▪ compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife, open system ▪ protocol: Wi-Fi ▪ transmission frequency: 2.4 GHz WIFI ▪ SD card storage ▪ cloud storage ▪ anti-theft protection ▪ control by voice assistants ▪ voice communication: two-way ▪ notifications to the mobile app ▪ WebRTC function





Wi Fi | Rechargeable 6 700 mAh | FULL HD Resolution 1 080p | Night vision | 130° | Human detection | Motion detection | 2 way audio | IR CUT Day/Night | IP65

8 592920 118177

H4032 | 1/-/-/10

30 10 040 320 | IP-15S

Accessories for videophones

- electrical door controls are a key part of security systems
- often complemented by code keypads or fingerprint readers
- automatically open door lock after access verification
- keypad w/ 2 relays, built-in RFID fob reader also available
- memory capacity of up to 1 000 codes

H8013 | 1/100/-/700

30 80 000 013 | H8013

8 595025 385802



product: RF tag ▪ dimensions: 28 × 7 mm ▪ packaging: 1 pc, packet ▪ frequency: 125 kHz

C0024 | 1/-/-/-

28 04 000 013 | C0024

4 042203 778382



product: lock ▪ type: with mechanical unblocking for constant entry - OPEN position ▪ power supply: 12 V AC/DC (not included) ▪ dimensions: 25 × 28 × 250 mm ▪ packaging: 1 pc, box

C0025 | 1/-/-/30

28 04 000 014 | C0025

4 042203 778306



product: lock ▪ type: with a time pin, after the electric impulse position OPENED, after passing through the door position CLOSED ▪ power supply: 12 V AC/DC (not included) ▪ dimensions: 25 × 28 × 250 mm ▪ packaging: 1 pc, box

C0030 | 1/-/-/12

28 04 000 030 | EM-0280A

8 592920 128886

12 V DC | Resistance 300 kg



product: door lock ▪ type: EM-0280A ▪ power supply: 12 V DC (není součást balení) ▪ dimensions: 250 × 25 × 32 mm ▪ packaging: 1 pc, box

H5023 | 1/-/-/18

30 69 050 230 | IP-006AX

8 592920 128862

Wi Fi | EMOS GoSmart



product: keyboard RFID, TUYA ▪ number of switching relays: 1 ▪ number of codes: up to 1 000 ▪ power source: 12 V AC/DC (not included) ▪ dimensions: 23 × 78 × 115 mm ▪ packaging: 1 pc, box ▪ frequency: 125 kHz ▪ supported OS: Android, iOS ▪ compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife, open system ▪ protocol: Wi-Fi ▪ transmission frequency: 2.4 GHz Wi-Fi ▪ cloud storage

H7009 | 1/-/-/50

30 70 000 009 | H7009

8 592920 110584



max. output total: 12 V/5 A ▪ input voltage: 100–240 V~, 47–63 Hz ▪ protection against overload, overvoltage and short circuit ▪ designed for: universal ▪ LED indicators ▪ output voltage: 12 V DC ▪ output current: max. 5 000 mA ▪ power supply type: no cable ▪ dimensions: 77 × 55 × 92 mm ▪ packaging: 1 pc, paper box

EMOS
A brand of legrand

www.emos.eu | Order Code Item Number | Packaging Type

Cameras, Surveillance

GoSmart Cameras

EMOS GoSmart

- For keeping people safe and protecting the interiors of homes
- Surveillance of exteriors of commercial and private buildings
- Alerts of unusual activity sent to mobile devices
- Two-way voice communication
- Automatic video and audio recording when motion is detected
- Connection to home network via WIFI protocol
- Compatibility with EMOS GoSmart products and TUYA devices
- Voice control with Google Assistant and Amazon Alexa

Powered by

Works with Amazon Alexa Google Assistant

Download on the App Store | GET IT ON Google Play

- automatic image saving
- setting the detection area
- night vision
- camera viewing angle: 100°
- IP rating: IP20
- camera resolution: 1 920 × 1 080
- motion detection
- sound detection
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi
- transmission frequency: 2.4 GHz WIFI
- voice communication: two-way
- motion tracking
- motorised rotation
- motion detection angle: 100°
- motion detection range: 10 meters





Wi Fi | FULL HD Resolution 1 080p | Night vision | Pan and tilt | 100° | Motion detection | Motion tracking | Sound detection | 2 way audio | Micro SD max. 128 Gb

8 592920 118191

H4051	1/-/-/12
30 24 040 510	IP-100 CUBE

- automatic image saving
- setting the detection area
- night vision
- camera viewing angle: 100°
- IP rating: IP20
- camera resolution: 2 304 × 1 296
- motion detection
- sound detection
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi
- transmission frequency: 2.4 GHz WIFI
- voice communication: two-way
- motion tracking
- motorised rotation
- motion detection angle: 100°
- motion detection range: 10 meters
- human body recognition





Wi Fi | 2K QUAD HD Resolution 3MP | Night vision | Pan and tilt | 100° | Motion detection | Cry alert | Lullaby | 2 way audio | Night light

8 592920 118146

H4052	1/-/-/6
30 24 040 520	IP-500 GUARD

- automatic image saving
- night vision
- camera viewing angle: 110°
- IP rating: IP55
- camera resolution: 1 920 × 1 080
- motion detection
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi
- transmission frequency: 2.4 GHz WIFI
- voice communication: two-way
- motion detection angle: 120°
- motion detection range: 10 meters
- human body recognition





Wi Fi | Rechargeable 8 800 mAh | FULL HD Resolution 1 080p | Night vision | 110° | Motion detection | 2 way audio | Solar charging | Siren 105 dB | IP55

8 592920 117743

H4056	1/-/-/5
30 24 040 560	IP-600 EYE

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- automatic image saving
- setting the detection area
- night vision
- camera viewing angle: 110°
- IP rating: IP65
- camera resolution: 2 616 × 1 958
- motion detection
- sound detection
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi
- transmission frequency: 2.4 GHz WIFI
- voice communication: two-way
- motion tracking
- motorised rotation
- motion detection angle: 110°
- motion detection range: 10 meters
- human body recognition





Wi Fi | 5MPx Resolution | Color Night vision | Pan and tilt | 110° | Motion detection | Human detection | Motion tracking | Sound detection | 2 way audio

8 592920 128909

H4057 | 1/-/-/4

30 24 040 570 | IP-800 WASP

- automatic image saving
- setting the detection area
- night vision: yes, 4× IR LED + white LED
- camera viewing angle: 105°
- IP rating: IP65
- camera resolution: 2 048 × 1 536
- motion detection
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: 4G, LTE
- transmission frequency: LTE
- voice communication: two-way
- motorised rotation
- motion detection angle: 120°
- motion detection range: 10 meters
- human body recognition





4G+Lte | Rechargeable 10 400 mAh | 3MPx Resolution | Color Night vision | Pan, tilt and zoom | Motion detection | Human detection | 2 way audio | Solar charging | IP65

8 592920 128923

H4058 | 1/-/-/4

30 24 040 580 | IP-6000 OWL

- automatic image saving
- setting the detection area
- night vision
- camera viewing angle: 100°
- IP rating: IP20
- camera resolution: 2 304 × 1 296
- motion detection
- sound detection
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi
- transmission frequency: 2.4 GHz WIFI
- voice communication: two-way
- motion tracking
- motorised rotation
- motion detection angle: 100°
- motion detection range: 10 meters





Wi Fi | 3MPx Resolution | Night vision | Pan and tilt | 100° | Motion detection | Motion tracking | Sound detection | 2 way audio | Micro SD max. 128 Gb

8 592920 128992

H4061 | 1/-/-/12

30 24 040 610 | IP-110 CUBEV2

- automatic image saving
- setting the detection area
- night vision: yes, 9× IR LED 850 nm
- camera viewing angle: 130°
- IP rating: IP65
- camera resolution: 2 592 × 1 944
- motion detection
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi
- transmission frequency: 2.4 GHz WIFI
- voice communication: two-way
- motion detection angle: 120°
- motion detection range: 9 metres
- human body recognition





Wi Fi | 5MPx Resolution | Night vision | 130° | Motion detection | Human detection | 2 way audio | Magnetic holder | PIR 120° 9 m | IP65

8 592920 129012

H4063 | 1/-/-/14

30 24 040 630 | IP-210 SNAPV2

- automatic image saving
- setting the detection area
- night vision: yes, 4× IR LED + white LED
- camera viewing angle: 130°
- IP rating: IP65
- camera resolution: 2 304 × 1 296
- motion detection
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi
- transmission frequency: 2.4 GHz WIFI
- voice communication: two-way
- motion tracking
- motorised rotation
- motion detection angle: 120°
- motion detection range: 10 meters





Wi Fi | 3MPx Resolution | Night vision | Pan | 130° | Motion detection | Motion tracking | 2 way audio | 200–1 200 lm | Siren 120 dB

8 592920 129036

H4064 | 1/-/-/4

30 24 040 640 | IP-310 TORCHV2 WHITE

EMOS
A brand of legrand

www.emos.eu | Order Code Item Number | Packaging Type

- automatic image saving
- setting the detection area
- night vision: yes, 4× IR LED + white LED
- camera viewing angle: 130°
- IP rating: IP65
- camera resolution: 2 304 × 1 296
- motion detection
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Wi-Fi
- transmission frequency: 2.4 GHz WIFI
- voice communication: two-way
- motion tracking
- motorised rotation
- motion detection angle: 120°
- motion detection range: 10 meters
- human body recognition





Wi Fi | 3MPx Resolution | Night vision | Pan | 130° | Motion detection | Motion tracking | 2 way audio | 200–1 200 lm | Siren 120 dB

8 592920 129050

H4065 | 1/-/-/4

30 24 040 650 | IP-310 TORCHV2 BLACK

Doorbells

Wireless doorbells

- EMOS doorbells have a battery- or mains-powered receiver
- paired from production/paired by user with ease in seconds
- new models with signal repeater – unlimited range
- with 1 or 2 waterproof buttons, more buttons can be added
- volume controls, optical signalisation, up to 52 ringtones

- reach of the button: 150 m
- number of melodies: 10
- pairing method: automatic pairing – self-learning
- special functions: battery-free button
- optical signaling on the doorbell
- optical signaling on the button
- maximum ringing volume: 110 dB
- option to add another button: yes, max. 8
- number of buttons in a package: 1 pc
- extra (spare) button: P5750T
- waterproof button: IP44
- power button: unpowered
- number of receivers in a package: 1 pc
- volume control: yes, 5 levels
- power supply of the main unit: 230 V AC





110 dB | 150 m | 10× | Water resistance | 230 V~ | NO BATTERY · NO WIRE · NO BATTERY

8 592920 096963

P5750 | 1/-/-/14

34 02 118 000 | P5750

- reach of the button: 150 m
- number of melodies: 10
- pairing method: automatic pairing – self-learning
- special functions: battery-free button
- optical signaling on the doorbell
- optical signaling on the button
- maximum ringing volume: 110 dB
- option to add another button: yes, max. 8
- number of buttons in a package: 2 pcs
- extra (spare) button: P5750T
- waterproof button: IP44
- power button: unpowered
- number of receivers in a package: 1 pc
- volume control: yes, 5 levels
- power supply of the main unit: 230 V AC





110 dB | 150 m | 10× | Water resistance | 230 V~ | NO BATTERY · NO WIRE · NO BATTERY

8 592920 096987

P5750.2T | 1/-/-/8

34 02 119 000 | P5750.2T

EMOS A brand of legrand | www.emos.eu | Order Code Item Number | Packaging Type

- reach of the button: 150 m
- number of melodies: 10
- pairing method: automatic pairing – self-learning
- special functions: battery-free button
- optical signaling on the doorbell
- optical signaling on the button
- maximum ringing volume: 110 dB
- option to add another button: yes, max. 8
- number of buttons in a package: 1 pc
- extra (spare) button: P5750T
- waterproof button: IP44
- power button: unpowered
- number of receivers in a package: 2 pcs
- volume control: yes, 5 levels
- power supply of the main unit: 230 V AC





110 dB | 150 m | 10× | Water resistance | 230 V~ | NO BATTERY – NO WIRE

8 592920 096949

P5750.2R | 1/-/-/8

34 02 120 000 | P5750.2R

- reach of the button: 120 m
- number of melodies: 16
- pairing method: automatic pairing – self-learning
- special functions: USB output – 2 A, repeater functi
- optical signaling on the doorbell
- optical signaling on the button
- maximum ringing volume: 85 dB
- option to add another button: yes, max. 8
- number of buttons in a package: 1 pc
- extra (spare) button: P5760T
- waterproof button: IP44
- power button: 1× 3 V CR2032 (included)
- number of receivers in a package: 1 pc
- volume control: yes, 5 levels
- power supply of the main unit: 230 V AC





85 dB | 120 m | 16× | Water resistance | 230 V~ | 1× CR2032

8 592920 057582

P5760 | 1/-/5/10

34 02 060 000 | P5760

- reach of the button: 120 m
- number of melodies: 16
- pairing method: automatic pairing – self-learning
- special functions: repeater function – allows extend
- optical signaling on the doorbell
- optical signaling on the button
- maximum ringing volume: 85 dB
- option to add another button: yes, max. 8
- number of buttons in a package: 1 pc
- extra (spare) button: P5760T
- waterproof button: IP44
- power button: 1× 3 V CR2032 (included)
- number of receivers in a package: 1 pc
- volume control: yes, 5 levels
- power supply of the main unit: 3× 1.5 V AA (not inclu





85 dB | 120 m | 16× | Water resistance | 3× AA | 1× CR2032

8 592920 057599

P5763 | 1/-/5/10

34 02 060 001 | P5763

- reach of the button: 120 m
- number of melodies: 16
- pairing method: automatic pairing – self-learning
- special functions: repeater function – allows extend
- optical signaling on the doorbell
- optical signaling on the button
- maximum ringing volume: 85 dB
- option to add another button: yes, max. 8
- extra (spare) button: P5760T
- power button: 1× 3 V CR2032 (included)
- number of receivers in a package: 1 pc
- volume control: yes, 5 levels
- power supply of the main unit: 3× 1.5 V AA (not inclu





85 dB | 120 m | 16× | Water resistance | 3× AA | 1× CR2032

8 592920 057612

P5763R | 1/-/5/15

34 02 063 000 | P5763R

- reach of the button: 150 m
- number of melodies: 36
- pairing method: automatic pairing – self-learning
- optical signaling on the button
- maximum ringing volume: 85 dB
- option to add another button: yes, max. 6
- number of buttons in a package: 1 pc
- extra (spare) button: P5727T
- waterproof button: IP44
- power button: 1× 3 V CR2032 (included)
- number of receivers in a package: 1 pc
- volume control: yes, 4 levels
- power supply of the main unit: 230 V AC





85 dB | 150 m | 36× | Water resistance | 230 V~

8 592920 067130

P5727 | 1/-/-/8

34 02 025 000 | P5727

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- reach of the button: 60 m
- number of melodies: 1
- pairing method: automatic pairing – self-learning
- optical signaling on the doorbell
- optical signaling on the button
- maximum ringing volume: 75 dB
- option to add another button: yes, max. 8
- number of buttons in a package: 1 pc
- extra (spare) button: P5723T
- waterproof button: IP44
- power button: 1× 3 V CR2032 (included)
- number of receivers in a package: 1 pc
- power supply of the main unit: 230 V AC





75 dB | 60 m | 1× | Water resistance | 230 V~ | 1× CR2032

8 595025 363589

P5705 1/-/4/12

34 02 005 000 98080S

- reach of the button: 100 m
- number of melodies: 16
- pairing method: automatic pairing – self-learning
- optical signaling on the doorbell
- optical signaling on the button
- maximum ringing volume: 80 dB
- option to add another button: yes, max. 8
- number of buttons in a package: 1 pc
- extra (spare) button: P5723T
- waterproof button: IP44
- power button: 1× 3 V CR2032 (included)
- number of receivers in a package: 1 pc
- volume control
- power supply of the main unit: 3× 1.5 V AA (not inclu





80 dB | 100 m | 16× | Water resistance | 3× AA | 1× CR2032

8 595025 377876

P5712 1/-/5/40

34 02 012 000 98105

- reach of the button: 100 m
- number of melodies: 36
- pairing method: automatic pairing – self-learning
- optical signaling on the button
- maximum ringing volume: 75 dB
- option to add another button: yes, max. 8
- number of buttons in a package: 1 pc
- extra (spare) button: P5723T
- waterproof button: IP44
- power button: 1× 3 V CR2032 (included)
- number of receivers in a package: 1 pc
- power supply of the main unit: 3× 1.5 V AA (not inclu





75 dB | 100 m | 36× | Water resistance | 3× AA | 1× CR2032

8 592920 006641

P5723 1/3/-/48

34 02 107 000 98098

- reach of the button: 180 m
- number of melodies: 52
- pairing method: automatic pairing – self-learning
- optical signaling on the doorbell
- optical signaling on the button
- maximum ringing volume: 90 dB
- option to add another button: yes, max. 6
- number of buttons in a package: 1 pc
- extra (spare) button: P5728T
- waterproof button: IP56
- power button: 1× 12 V A23 (included)
- number of receivers in a package: 1 pc
- volume control: yes, 5 levels
- power supply of the main unit: 3× 1.5 V AAA (not inc





90 dB | 180 m | 52× | Water resistance | 3× AAA

8 592920 080382

P5728 1/-/-/30

34 02 043 000 P5728

- reach of the button: 180 m
- number of melodies: 52
- pairing method: automatic pairing – self-learning
- optical signaling on the doorbell
- optical signaling on the button
- maximum ringing volume: 90 dB
- option to add another button: yes, max. 6
- number of buttons in a package: 1 pc
- extra (spare) button: P5728T
- waterproof button: IP56
- power button: 1× 12 V A23 (included)
- number of receivers in a package: 2 pcs
- volume control: yes, 5 levels
- power supply of the main unit: 3× 1.5 V AAA (not inc





90 dB | 180 m | 52× | Water resistance | 6× AAA

8 592920 084281

P5730 1/-/-/12

34 02 115 000 P5730

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

- reach of the button: 180 m
- number of melodies: 36
- pairing method: automatic pairing – self-learning
- special functions: battery-free button
- optical signaling on the doorbell
- optical signaling on the button
- maximum ringing volume: 90 dB
- option to add another button: yes, max. 6
- number of buttons in a package: 1 pc
- extra (spare) button: P5729T
- waterproof button: IP44
- power button: unpowered
- number of receivers in a package: 1 pc
- volume control: yes, 4 levels
- power supply of the main unit: 230 V AC





90 dB | 180 m | 36× | Water resistance | 230 V~ | NO BATTERY NO WIRE

8 592920 080405

P5729 | 1/-/-/14

34 02 044 000 | P5729

- reach of the button: 180 m
- number of melodies: 36
- pairing method: automatic pairing – self-learning
- special functions: battery-free button
- optical signaling on the doorbell
- optical signaling on the button
- maximum ringing volume: 90 dB
- option to add another button: yes, max. 6
- number of buttons in a package: 1 pc
- extra (spare) button: P5729T
- waterproof button: IP44
- power button: unpowered
- number of receivers in a package: 2 pcs
- volume control: yes, 4 levels
- power supply of the main unit: 230 V AC





90 dB | 180 m | 36× | Water resistance | 230 V~ | NO BATTERY NO WIRE

8 592920 084304

P5731 | 1/-/-/8

34 02 116 000 | P5731

- reach of the button: 180 m
- number of melodies: 36
- pairing method: automatic pairing – self-learning
- special functions: battery-free button
- optical signaling on the doorbell
- optical signaling on the button
- maximum ringing volume: 90 dB
- option to add another button: yes, max. 6
- number of buttons in a package: 1 pc
- extra (spare) button: P5729T
- waterproof button: IP44
- power button: unpowered
- number of receivers in a package: 1 pc
- volume control: yes, 4 levels
- power supply of the main unit: 230 V AC





90 dB | 180 m | 36× | Water resistance | 230 V~ | NO BATTERY NO WIRE

8 592920 105948

P5729B | 1/-/-/14

34 02 121 000 | P5729B

- reach of the button: 150 m
- number of melodies: 36
- pairing method: automatic pairing – self-learning
- special functions: highly visible optical signalisation
- optical signaling on the doorbell
- optical signaling on the button
- maximum ringing volume: 110 dB
- option to add another button: yes, max. 8
- number of buttons in a package: 1 pc
- extra (spare) button: P5732T
- waterproof button: IP44
- power button: 1× 3 V CR2032 (included)
- number of receivers in a package: 1 pc
- volume control: yes, 4 levels
- power supply of the main unit: 230 V AC





110 dB | 150 m | 36× | Water resistance | 230 V~ | 1× CR2032

8 592920 105962

P5733W | 1/-/-/14

34 02 122 000 | P5733W

- reach of the button: 150 m
- number of melodies: 36
- pairing method: automatic pairing – self-learning
- special functions: highly visible optical signalisation
- optical signaling on the doorbell
- optical signaling on the button
- maximum ringing volume: 110 dB
- option to add another button: yes, max. 8
- number of buttons in a package: 1 pc
- extra (spare) button: P5732T
- waterproof button: IP44
- power button: 1× 3 V CR2032 (included)
- number of receivers in a package: 1 pc
- volume control: yes, 4 levels
- power supply of the main unit: 230 V AC





110 dB | 150 m | 36× | Water resistance | 230 V~ | 1× CR2032

8 592920 105986

P5733S | 1/-/-/14

34 02 123 000 | P5733S

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- reach of the button: 150 m
- number of melodies: 36
- pairing method: automatic pairing – self-learning
- special functions: highly visible optical signalisation
- optical signaling on the doorbell
- optical signaling on the button
- maximum ringing volume: 110 dB
- option to add another button: yes, max. 8
- number of buttons in a package: 1 pc
- extra (spare) button: P5732T
- waterproof button: IP44
- power button: 1× 3 V CR2032 (included)
- number of receivers in a package: 1 pc
- volume control: yes, 4 levels
- power supply of the main unit: 230 V AC





110 dB | 150 m | 36× | Water resistance | 230 V~ | 1× CR2032

8 592920 106006

P5733G 1/-/-/14

34 02 124 000 P5733G

- reach of the button: 150 m
- number of melodies: 10
- pairing method: automatic pairing – self-learning
- optical signaling on the doorbell
- optical signaling on the button
- maximum ringing volume: 85 dB
- option to add another button: yes, max. 8
- number of buttons in a package: 1 pc
- extra (spare) button: P5734T
- waterproof button: IP56
- power button: 1× 3 V CR2032 (included)
- number of receivers in a package: 1 pc
- volume control: yes, 5 levels
- power supply of the main unit: 230 V AC





85 dB | 150 m | 10× | Water resistance | 230 V~ | 1× CR2032

8 592920 112793

P5734 1/-/-/14

34 02 125 000 P5734

- reach of the button: 150 m
- number of melodies: 10
- pairing method: automatic pairing – self-learning
- optical signaling on the doorbell
- optical signaling on the button
- maximum ringing volume: 85 dB
- option to add another button: yes, max. 8
- number of buttons in a package: 1 pc
- extra (spare) button: P5734T
- waterproof button: IP56
- power button: 1× 3 V CR2032 (included)
- number of receivers in a package: 1 pc
- volume control: yes, 5 levels
- power supply of the main unit: 230 V AC





85 dB | 150 m | 10× | Water resistance | 230 V~ | 1× CR2032

8 592920 112809

P5734B 1/-/-/14

34 02 126 000 P5734B

Spare push buttons

- spare or additional buttons for EMOS doorbells
- wireless, compatible with certain door chime type
- most commonly require 1 battery, water resistant (IP44)

- power source: unpowered
- pairing method: self-learning (automatic pairing)
- range in open space: up to 150 m
- IP rating: IP55
- designed for the type of bell: P5750, P5750.2T, P575





150 m | Water resistance | NO BATTERY NO WIRE NO BATTERY

8 592920 097007

P5750T 1/-/-/50

34 02 118 001 P5750T

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- power source: 1× 3 V CR2032 (included)
- pairing method: self-learning (automatic pairing)
- range in open space: up to 120 m
- IP rating: IP44
- designed for the type of bell: P5760, P5763, P5763R





120 m | Water resistance | 1× CR2032

8 592920 057605

P5760T 1/-/5/40

34 02 060 002 P5760T

- power source: 1× 3 V CR2032 (included)
- pairing method: self-learning (automatic pairing)
- range in open space: up to 100 m
- IP rating: IP44
- designed for the type of bell: 98103, 98098, 98105,





100 m | Water resistance | 1× CR2032

8 592920 006658

P5723T 1/-/-/48

34 02 108 000 98YK

- power source: 1× 3 V CR2032 (included)
- pairing method: self-learning (automatic pairing)
- range in open space: up to 150 m
- IP rating: IP44
- designed for the type of bell: P5727





150 m | Water resistance | 1× CR2032

8 592920 069868

P5727T 1/-/-/50

34 02 112 000 P5727T

- power source: 1× 12 V A23 (included)
- pairing method: self-learning (automatic pairing)
- range in open space: up to 180 m
- IP rating: IP56
- designed for the type of bell: P5728, P5730





180 m | Water resistance | 1× A23

8 592920 080412

P5728T 1/-/-/50

34 02 113 000 P5728T

- power source: unpowered
- pairing method: self-learning (automatic pairing)
- range in open space: up to 180 m
- IP rating: IP44
- designed for the type of bell: P5729, P5729B, P5731





180 m | Water resistance | NO BATTERY NO WIRE NO BATTERY

8 592920 080429

P5729T 1/-/-/50

34 02 114 000 P5729T


EMOS
A brand of legrand

www.emos.eu

Order Code Item Number	Packaging Type

- power source: 1× 3 V CR2032 (included)
- pairing method: self-learning (automatic pairing)
- range in open space: up to 100 m
- IP rating: IP44
- designed for the type of bell: P5732, P5733W, P573





100 m | Water resistance | 1× CR2032

8 592920 087817

P5732T 1/-/-/50
34 02 117 001 P5732T

- power source: 1× 3 V CR2032 (included)
- pairing method: self-learning (automatic pairing)
- range in open space: up to 150 m
- IP rating: IP56
- designed for the type of bell: P5734, P5734B





150 m | Water resistance | 1× CR2032

8 592920 112816

P5734T 1/-/-/50
34 02 126 001 P5734T

Wired doorbells

- classic mechanical bells with one melody
- distance between bell and button exactly according to the user's needs
- constantly functional thanks to 230 V power supply

- reach of the button: wiring connection
- number of melodies: 1
- maximum ringing volume: 85 dB
- power button: wiring connection
- number of receivers in a package: 1 pc
- power supply of the main unit: 230 V AC





85 dB | 1× | 230 V~

8 592920 119426

P57001 1/-/-/20
34 01 000 010 P57001

- reach of the button: wiring connection
- number of melodies: 1
- maximum ringing volume: 85 dB
- power button: wiring connection
- number of receivers in a package: 1 pc
- power supply of the main unit: 230 V AC





85 dB | 1× | 230 V~

8 592920 119433

P57002 1/-/-/20
34 01 000 020 P57002

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

Sensors GoSmart

EMOS GoSmart

- Sensors to secure your home
- Motion detection and instant notification in the app
- Window and door security check
- Real-time identification of unusual situations
- Connect to your home network via ZigBee protocol
- Compatibility with EMOS GoSmart products and TUYA devices
- Voice control with Google Assistant and Amazon Alexa

Powered by

Works with Amazon Alexa Google Assistant

Download on the App Store

GET IT ON Google Play

- product: motion sensor
- detection angle: 90°
- detection distance: 8 m
- IP rating: IP20
- sensor type: PIR
- power source: 1× CR123A (3 V)
- packaging: 1 pc, small box
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife

- protocol: Zigbee 3.0
- transmission frequency: 2.4 GHz (2 405–2 480 MHz)
- notifications to the mobile app
- aplication languages: EN, CZ, SK, PL, DE, HU, SI, FR,





ZigBee 3.0 | Motion detection | Motion Log | Magnetic holder | PIR 90° 8 m | 3M TAPE mounting | 1× CR123A

8 592920 128749

H5020	1/-/-/40
30 69 052 010	IP-2210Z

- product: door/window sensor
- IP rating: IP20
- sensor type: magnetic
- power source: 1× CR2032 (3 V)
- packaging: 1 pc, small box
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Zigbee 3.0
- transmission frequency: 2.4 GHz (2 405–2 480 MHz)

- notifications to the mobile app
- aplication languages: EN, CZ, SK, PL, DE, HU, SI, FR,





ZigBee 3.0

8 592920 128732

H5021	1/-/-/100
30 69 052 020	IP-2211Z


EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

Multimeters, testers

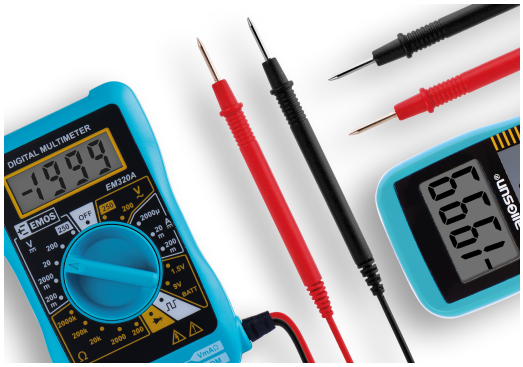

Multimeters, measuring cables

- multimeters measure electrical quantities – voltage, etc.
- automatic or manual measurement range selection
- also measure temperature and allow diode or transistor tests
- clamp multimeter for higher values, w/o circuit interruption
- plus spare measuring leads with tips, for any multimeter

AC voltage: 600 mV – 750 V ▪ AC current: 600 µA–10 A ▪ DC voltage: 600 mV – 1 000 V ▪ DC current: 600 µA–10 A ▪ screen display: 5 3/4 digit ▪ backlight display ▪ range selection: both automatic and manual ▪ electrical resistance: 600 Ohm – 60 MOhm ▪ circuit continuity ▪ diode test ▪ transistor test ▪ temperature measurement: -40 °C to +300 °C ▪ max. value hold ▪ Data hold mode ▪ auto power off ▪ included: battery, measurement tips, reduction for measuring transistors, temperature probe type K ▪ power source: 1× 9 V (included) ▪ dimensions: 35 × 90 × 190 mm





Function | °C/°F | Continuity beeper | Data hold

8 592920 106129

M0430 | 1/-/-/8

22 02 019 000 | MD-430

AC voltage: 2–300 V ▪ AC current: 200 µA – 10 A / with pliers up to 1 000 A (not included) ▪ DC voltage: 200 mV – 300 V ▪ DC current: 200 µA – 10 A / with pliers up to 1 000 A (not included) ▪ screen display: 3.5 digit ▪ backlight display ▪ range selection: automatic ▪ electrical resistance: 200 Ohm – 20 MOhm ▪ circuit continuity ▪ diode test ▪ transistor test ▪ temperature measurement: -20 °C to +1 000 °C ▪ max. value hold ▪ Data hold mode ▪ auto power off ▪ included: battery, test leads, reduction for measuring transistors, temp. probe type K, lock the battery cover ▪ power source: 3× 1.5 V AAA (included) ▪ dimensions: 35 × 75 × 158 mm





Function | °C/°F | Continuity beeper | Data hold

8 595025 367846

M0420 | 1/-/10/20

22 02 008 000 | MD-420

AC voltage: 200 mV – 300 V ▪ AC current: 20 mA – 10 A ▪ DC voltage: 200 mV – 300 V ▪ DC current: 20 mA – 10 A ▪ screen display: 3.5 digit ▪ backlight display ▪ range selection: manual ▪ non-contact AC voltage detection ▪ electrical resistance: 200 Ohm – 20 MOhm ▪ circuit continuity ▪ diode test ▪ battery test ▪ temperature measurement: 0 °C to +1 000 °C ▪ Data hold mode ▪ included: battery, manual, measurement tips ▪ power source: 1× 9 V (included) ▪ dimensions: 168 × 83 × 35 mm





Function | °C | Continuity beeper | Data hold

8 592920 063767

M3691 | 1/-/-/20

22 02 016 000 | EM3691

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

AC voltage: 200–300 V ▪ DC voltage: 200 mV – 300 V ▪ DC current: 20 mA – 10 A ▪ screen display: 3.5 digit ▪ backlight display ▪ range selection: manual ▪ electrical resistance: 200 Ohm – 2 MOhm ▪ circuit continuity ▪ diode test ▪ battery test ▪ Data hold mode ▪ included: battery, manual, measurement tips ▪ power source: 1× 9 V (included) ▪ dimensions: 150 × 75 × 35 mm





Function | Continuity beeper | Data hold

8 592920 063798

M3620 1/-/-/20

22 02 017 000 MD-310

AC voltage: 200–600 V ▪ AC current: 200 mA – 10 A ▪ DC voltage: 2–600 V ▪ DC current: 200 mA – 10 A ▪ screen display: 3.5 digit ▪ backlight display ▪ range selection: manual ▪ electrical resistance: 200 Ohm – 2 MOhm ▪ circuit continuity ▪ diode test ▪ battery test: 1.5 V/9 V ▪ temperature measurement: -40 °C to +300 °C ▪ Data hold mode ▪ auto power off ▪ included: battery, manual, measurement tips, temperature probe ▪ power source: 3× 1.5 V AAA (included) ▪ dimensions: 35 × 75 × 155 mm





Function | °C/°F | Continuity beeper | Data hold

8 592920 106105

M0230 1/-/-/20

22 02 020 000 MD-230

AC voltage: 2–600 V ▪ AC current: 2 mA – 10 A ▪ DC voltage: 200 mV – 600 V ▪ DC current: 2 mA – 10 A ▪ screen display: 3.5 digit ▪ range selection: manual ▪ electrical resistance: 200 Ohm – 20 MOhm ▪ circuit continuity ▪ diode test ▪ transistor test ▪ included: battery, manual, measurement tips ▪ power source: 1× 9 V (included) ▪ dimensions: 32 × 85 × 165 mm





Function | Continuity beeper

8 595025 314703

M2092 1/-/5/15

22 02 003 000 MD-220

AC voltage: 200–300 V ▪ DC voltage: 200 mV – 300 V ▪ DC current: 20 µA – 10 A ▪ screen display: 3.5 digit ▪ range selection: manual ▪ electrical resistance: 200 Ohm – 2 MOhm ▪ circuit continuity ▪ diode test ▪ included: battery, manual, measurement tips, protective case ▪ power source: 1× 9 V (included) ▪ dimensions: 27 × 70 × 135 mm





Function | Continuity beeper

8 595025 361479

M0391 1/-/10/20

22 02 007 000 MD-210

AC voltage: 200–300 V ▪ DC voltage: 200 mV – 300 V ▪ DC current: 2 000 µA – 200 mA ▪ screen display: 3.5 digit ▪ range selection: manual ▪ electrical resistance: 200 Ohm – 2 MOhm ▪ diode test ▪ battery test: 1.5 V/9 V ▪ included: battery, manual, measurement tips ▪ power source: 1× 12 V (included) ▪ dimensions: 30 × 57 × 95 mm





Function

8 592920 002018

M0320 1/-/6/18

22 02 014 000 MD-110

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

AC voltage: 4–600 V ▪ AC current: 400 A ▪ DC voltage: 400 mV – 600 V ▪ DC current: 400 A ▪ clamp multimeter ▪ screen display: 3 3/4 digit ▪ range selection: automatic ▪ electrical resistance: 400 Ohm – 40 MOhm ▪ circuit continuity ▪ diode test ▪ temperature measurement: -20 °C to +1 000 °C ▪ Data hold mode ▪ auto power off ▪ included: battery, manual, measurement tips ▪ power source: 2× 1.5 V AAA (included) ▪ dimensions: 38 × 71 × 194 mm





Function | °C | Continuity beeper | Data hold

8 595025 390394

M0400 | 1/-/-/20

22 02 013 000 | MD-410C

AC voltage: 2–600 V ▪ AC current: 2–600 A ▪ DC voltage: 200 mV – 600 V ▪ clamp multimeter ▪ screen display: 3.5 digit ▪ range selection: automatic ▪ electrical resistance: 200 Ohm – 20 MOhm ▪ circuit continuity ▪ diode test ▪ Data hold mode ▪ auto power off ▪ included: battery, manual, measurement tips ▪ power source: 2× 3 V CR2032 (included) ▪ dimensions: 36 × 76 × 190 mm





Function | Continuity beeper | Data hold

8 592920 004814

M0305 | 1/-/12/24

22 02 015 000 | MD-310C

---

cable length: 95 cm ▪ maximum load: 1 A, 30 V AC, 60 V DC ▪ possibility to tips exchange ▪ colour: red, black ▪ packaging: 1 pc, blister





max. 30 V~ 60 V ⎓ | 1 A | 0.95 m

8 592920 103975

S4001N | 1/5/-/50

23 04 000 101 | S4001N

---

cable length: 95 cm ▪ maximum load: 10 A, 1 kV, CAT III ▪ colour: red, black ▪ packaging: packet





1 000 V max. | 10 A | 0.95 m

8 595025 372802

S4003 | 1/-/-/200

23 04 000 300 | BB58

AC voltage: 2–600 V ▪ AC current: 200 µA – 200 mA ▪ DC voltage: 200 mV – 600 V ▪ DC current: 200 µA – 200 mA ▪ screen display: 3 1/2 digit ▪ backlight display ▪ range selection: automatic ▪ electrical resistance: 200 Ohm – 20 MOhm ▪ circuit continuity ▪ diode test ▪ max. value hold ▪ Data hold mode ▪ auto power off ▪ included: battery, manual, measurement tips ▪ power source: 2× 1.5 V AAA (included) ▪ dimensions: 44 × 38 × 230 mm





Function | Data hold | Continuity beeper

8 592920 129364

M3216 | 1/-/-/6

22 02 021 000 | MD-300

Testers

- voltage tester for measuring voltage value
- also identifies phases, sequence and polarity
- detects DC and AC voltage, contact or non-contact
- results indicated optically and acoustically

DC voltage: 6–690 V ▪ AC voltage: 6–690 V ▪ AC/DC voltage: 6 V, 12 V, 24 V, 50 V, 120 V, 230 V, 400 V, 690 V ▪ polarity indication ▪ phase indication ▪ signalization: optical + acoustic ▪ power source: 2× 1.5 V AAA (included) ▪ frequency range: 45–65 Hz ▪ measuring of connections of circuits ▪ packaging: 1 pc, blister





Function | Signalization | Phase rotary

8 592920 075463

M0071 1/-/-/10
22 01 013 000 VT-710

DC voltage: 12–690 V ▪ AC voltage: 12–690 V ▪ AC/DC voltage: 12 V, 24 V, 50 V, 120 V, 230 V, 400 V, 690 V ▪ polarity indication ▪ phase indication ▪ signalization: optical + acoustic ▪ power source: 9 V (included) ▪ frequency range: 0–60 Hz ▪ measuring of connections of circuits ▪ packaging: 1 pc, blister





Function | Signalization | Phase rotary

8 592920 082522

M0012A 1/5/-/15
22 01 014 000 VT-320

DC voltage: 110–400 V ▪ AC voltage: 110–400 V ▪ AC/DC voltage: 110 V, 230 V, 400 V ▪ polarity indication ▪ phase indication ▪ signalization: optical ▪ power source: from power source ▪ frequency range: 0–60 Hz ▪ packaging: 1 pc, blister





Function | Signalization | Phase rotary

8 592920 044032

M0014A 1/5/-/15
22 01 012 000 VT-310

detection: AC wiring ▪ signalization: optical + acustic ▪ AC voltage: 70–1 000 V ▪ dimensions: 153 × 22 mm ▪ power source: 2× 1.5 V AAA (included) ▪ packaging: 1 pc, blister





Function | Signalization

8 595025 391179

M0007A 1/-/30/60
22 05 000 010 VT-150

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

DC voltage: 0 to 250 V contactless ▪ AC voltage: 70 to 250 V contactless ▪ AC/DC voltage: 0–250 V, 70–250 V ▪ polarity indication ▪ non-contact measuring: polarity of sources and short-circuit, microwave ovens monitors emission ▪ signalization: optical ▪ power source: 2× 1.5 V LR41 (included) ▪ frequency range: 0–60 Hz ▪ packaging: 1 pc, blister





Function | Signalization

8 595025 301185

M0018
22 01 001 000

1/5/-/45
VT-110

DC voltage: 0 to 250 V contactless ▪ AC voltage: 70 to 250 V contactless ▪ AC/DC voltage: 0–250 V, 70–250 V ▪ polarity indication ▪ non-contact measuring: polarity of sources and short-circuit, microwave ovens monitors emission ▪ two settings of sensitivity ▪ signalization: optical + acoustic ▪ power source: 2× 1.5 V LR44 (included) ▪ frequency range: 0–60 Hz ▪ packaging: 1 pc, blister





Function | Signalization

8 595025 301284

M0048
22 01 002 000

1/5/-/50
VT-120

DC voltage: 6–400 V ▪ AC voltage: 6–400 V ▪ AC/DC voltage: 6 V, 12 V, 24 V, 50 V, 120 V, 230 V, 400 V ▪ polarity indication ▪ signalization: optical ▪ power source: from power source ▪ frequency range: 0–60 Hz ▪ packaging: 1 pc, blister





Function | Signalization

8 592920 090664

M0003B
22 01 015 000

1/-/5/40
VT-211

---

designed for battery type: AAA, AA, C, D,9 V and for button cells 1.5 V, 3 V ▪ type: UNI D3 ▪ value of load resistance for the AA, AAA, C, D, 9 V: universal ▪ the value of load resistance for button batteries: universal ▪ dimensions: 110 × 60 × 25 mm





8 592920 016688

N0322
22 03 003 000

1/-/5/50
UNI D3

Measuring instruments

- multidetector maps electrical wiring – no more drilled wires
- laser range finder calculates distance, area and room volume
- non-contact voltage detector for AC voltage to up to 1 000 V

---

detection: wood, metal, AC wiring ▪ signalization: optical + acustic ▪ dimensions: 28 × 72 × 155 mm ▪ power source: 1× 9 V (included) ▪ packaging: 1 pc, blister





Auto OFF | Signalization

8 592920 037003

M0501 | 1/-/5/30
22 06 000 010 | M0501

---

measuring distance: 0.05–40 m ▪ measuring functions: length, surface, volume, continual measurement, Pythagoras ▪ measuring units: m, ft, in, m², ft², m³, ft³ ▪ power source: 2× 1.5 V AAA (not included) ▪ packaging: 1 pc, small box





40 m | m² | m³ | $c^2 = a^2 + b^2$

8 592920 037546

M0502 | 1/-/-/50
22 06 000 020 | M0502

---

measuring functions: temperature ▪ measuring units: °C/°F ▪ power source: 1× 9 V ▪ packaging: 1 pc, blister





D:S 8:1 | Laser pointer | Backlit display | -50 – +380 °C

8 592920 075661

M0503 | 1/-/-/18
22 06 000 030 | M0503

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

Thermostats, CO and smoke alarms



Thermostats

Thermostats EMOS

- indoor thermostats regulate heating systems & cooling units
- manual and digital, with programmable heating cycle
- wireless, wired and clamp-on (monitor service water temp.)
- often with backlit display and always with freeze protection
- bestseller: wireless digital thermostats (simple to install)

thermostat type: wireless with OpenTherm communication ▪ type of control: programmable electronic indoor thermostat ▪ backlight display ▪ control mode: heating and cooling system ▪ number of programs: 6 + 3 customizable for users ▪ temperature adjustment type: comfort and economy temperature ▪ temperature measurement: 0 °C to 40 °C, resolution 0.2 °C ▪ temperature adjustment: from 7 °C up to 30 °C, after 0.2 °C ▪ anti-frost protection ▪ ON/OFF function ▪ switching: 230 V AC or potential-free ▪ switching load: 16 A resistive, 5 A inductive ▪ power of transmitter: 2× 1.5 V AA (included) ▪ power of receiver: 230 V AC ▪ receiver's dimension: 37 × 115 × 91 mm ▪ transmitter's dimension: 23 × 97 × 122 mm



Programmable | 16 A/5 A | 100 m | OpenTherm | Energy saving | 7–30 °C | Heating /Cooling | Wireless | 868 MHz

8 592920 098028

P5611OT | 1/-/-/10
21 01 309 000 | P5611OT

thermostat type: wireless ▪ type of control: programmable electronic room thermostat, option to control via mobile phone (iOS, Android) ▪ backlight display ▪ control mode: heating system ▪ number of programs: customisable ▪ temperature adjustment type: 6 temperature changes per day ▪ temperature measurement: 0 °C to 40 °C, resolution 0.1 °C ▪ temperature adjustment: 5 °C to 35 °C, resolution 0.5 °C ▪ anti-frost protection ▪ ON/OFF function ▪ holiday mode ▪ switching: 230 V AC or potential-free ▪ switching load: 16 A resistive, 4 A inductive ▪ power of transmitter: 5 V USB adapter (included) ▪ power of receiver: 230 V AC ▪ receiver's dimension: 37 × 86 × 86 mm ▪ transmitter's dimension: 15 × 96 × 96 mm ▪ part of the package: wireless thermostat, wireless receiver, USB car charger 5 V/1.5 A, micro USB cable 1.5 m



Smart | 16 A/4 A | 100 m | 5–35 °C | Heating | Wireless | 5 V/1.5 A USB adapter | Download on the App Store | GET IT ON Google Play

8 592920 080399

P5623 | 1/-/-/8
21 01 306 000 | P5623

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

thermostat type: wireless with OpenTherm communication ▪ type of control: programmable electronic indoor thermostat ▪ backlight display ▪ control mode: heating and cooling system ▪ number of programs: 1 customisable programme or customisable temperature (6× per day) ▪ temperature adjustment type: 6 temperature changes per day ▪ temperature measurement: 0 °C to 40 °C, resolution 0.1 °C ▪ temperature adjustment: from 5 °C up to 35 °C, after 0.5 °C ▪ anti-frost protection ▪ ON/OFF function ▪ holiday mode ▪ switching: 230 V AC or potential-free ▪ switching load: 10 A resistive, 4 A inductive ▪ power of transmitter: 2× 1.5 V AA (included) ▪ power of receiver: 230 V AC ▪ receiver's dimension: 26 × 86 × 86 mm ▪ transmitter's dimension: 26 × 126 × 84 mm



Programmable | 10 A/4 A | 80 m | OpenTherm | Energy saving | 5–35 °C | Heating /Cooling | Wireless | 868 MHz

8 592920 089323

P5616OT 1/-/-/12

21 01 307 000 P5616OT

---

thermostat type: wireless ▪ type of control: manual electronic indoor thermostat ▪ backlight display ▪ control mode: heating and cooling system ▪ number of programs: user adjustable temperature ▪ temperature adjustment type: manually ▪ temperature measurement: 0 °C to 40 °C, resolution 0.1 °C ▪ temperature adjustment: from 5 °C up to 35 °C, after 0.5 °C ▪ anti-frost protection ▪ ON/OFF function ▪ switching: 230 V AC or potential-free ▪ switching load: 16 A resistive, 4 A inductive ▪ power of transmitter: 2× 1.5 V AAA (included) ▪ power of receiver: 230 V AC ▪ receiver's dimension: 26 × 86 × 86 mm ▪ transmitter's dimension: 28 × 120 × 77 mm



Easy control | 16 A/4 A | 100 m | Energy saving | 5–35 °C | Heating /Cooling | Wireless | 2× AAA | 230 V~ 50 Hz

8 592920 064016

P5614 1/-/-/12

21 01 106 010 P5614

---

thermostat type: wired with OpenTherm communication ▪ type of control: programmable electronic indoor thermostat ▪ backlight display ▪ control mode: heating and cooling system ▪ number of programs: 1 customisable programme or customisable temperature (6× per day) ▪ temperature adjustment type: 6 temperature changes per day ▪ temperature measurement: 0 °C to 40 °C, resolution 0.1 °C ▪ temperature adjustment: from 5 °C up to 35 °C, after 0.5 °C ▪ anti-frost protection ▪ ON/OFF function ▪ holiday mode ▪ switching: 230 V AC or potential-free ▪ switching load: 6 A resistive, 2 A inductive ▪ power source: 2× 1.5 V AA (included) ▪ dimensions: 26 × 126 × 84 mm



Programmable | 6 A/2 A | OpenTherm | Energy saving | 5–35 °C | Heating /Cooling | 2× AA

8 592920 089354

P5606OT 1/-/-/40

21 01 208 000 P5606OT

---

thermostat type: wire ▪ type of control: programmable electronic indoor thermostat ▪ backlight display ▪ control mode: heating and cooling system ▪ number of programs: 1 customisable programme or customisable temperature (6× per day) ▪ temperature adjustment type: 6 temperature changes per day ▪ temperature measurement: 0 °C to 40 °C, resolution 0.1 °C ▪ temperature adjustment: from 5 °C up to 35 °C, after 0.5 °C ▪ anti-frost protection ▪ switching: 230 V AC or potential-free ▪ switching load: 8 A resistively, 2 A inductively ▪ power source: 2× 1.5 V AAA (included) ▪ dimensions: 26 × 120 × 78 mm



Programmable | 8 A/2 A | Energy saving | 5–35 °C | Heating /Cooling | 2× AAA

8 592920 103395

P5607 1/-/-/20

21 01 209 000 P5607

---

thermostat type: wire ▪ type of control: manual indoor thermostat ▪ backlight display ▪ control mode: heating and cooling system ▪ number of programs: user adjustable temperature ▪ temperature adjustment type: manually ▪ temperature measurement: 0 °C to 40 °C, resolution 0.1 °C ▪ temperature adjustment: from 5 °C up to 35 °C, after 0.5 °C ▪ anti-frost protection ▪ switching: 230 V AC or potential-free ▪ switching load: 8 A resistively, 2 A inductively ▪ power source: 2× 1.5 V AAA (included) ▪ dimensions: 30 × 120 × 77 mm



Easy control | 8 A/2 A | Energy saving | 5–35 °C | Heating /Cooling | 2× AAA

8 592920 064030

P5604 1/-/-/40

21 01 106 000 P5604

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

thermostat type: wire ▪ type of control: manual indoor thermostat ▪ control mode: heating and cooling system ▪ number of programs: user adjustable temperature ▪ temperature adjustment type: manually ▪ temperature measurement: 0 °C to 40 °C, resolution 1 °C ▪ temperature adjustment: from 5 °C up to 30 °C, after 1 °C ▪ anti-frost protection ▪ switching: 230 V AC or potential-free ▪ switching load: 6 A resistive, 2 A inductive ▪ power source: 2× 1.5 V AA (included) ▪ dimensions: 40 × 93 × 86 mm





Easy control | 6 A/2 A | 5–30 °C | Heating /Cooling | Energy saving | 2× AA

8 592920 113523

P5603R | 1/-/-/36

21 01 106 001 | P5603R

---

thermostat type: wired for underfloor heating, concealed ▪ type of control: programmable electronic indoor thermostat ▪ backlight display ▪ control mode: heating system ▪ number of programs: 1 customisable programme or customisable temperature (6× per day) ▪ temperature adjustment type: 6 temperature changes per day ▪ temperature measurement: 0 °C to 99 °C, resolution 0.1 °C ▪ temperature adjustment: from 5 °C up to 95 °C, after 0.5 °C ▪ anti-frost protection ▪ ON/OFF function ▪ switching: voltage 230 V AC, 50 Hz ▪ switching load: 16 A resistive ▪ power source: 230 V AC ▪ dimensions: 43 × 86 × 90 mm ▪ part of the package: thermostat, floor sensor 3 m





Programmable | Room & Floor sensor | 16 A | Heating | 5–95 °C | Energy saving | 230 V~ 50 Hz

8 592920 112922

P5601UF | 1/-/-/14

21 01 210 000 | P5601UF

---

thermostat type: wire, flow thermostat ▪ type of control: manual thermostat ▪ control mode: heating and cooling system ▪ temperature measurement: 0 °C to 90 °C ▪ temperature adjustment: 0 °C to 90 °C, resolution 5 °C ▪ switching: voltage 230 V AC, 50 Hz ▪ switching load: 16 A resistive, 4 A inductive ▪ power source: 230 V, 400 V AC ▪ dimensions: 38 × 54 × 105 mm





16 A/4 A | Energy saving | 0–90 °C | Heating /Cooling | 230 V~ 50 Hz

8 592920 021910

P5681 | 1/-/5/20

21 01 103 000 | T80

---

thermostat type: wire, capillary sensor thermostat ▪ type of control: manual thermostat ▪ control mode: heating and cooling system ▪ temperature measurement: 0 °C to 90 °C ▪ temperature adjustment: 0 °C to 90 °C, resolution 5 °C ▪ switching: voltage 230 V AC, 50 Hz ▪ switching load: 16 A resistive, 4 A inductive ▪ capillary sensor length: 1 m, Ø 7 mm ▪ power source: 230 V, 400 V AC ▪ dimensions: 38 × 54 × 105 mm





16 A/4 A | Energy saving | 0–90 °C | Heating /Cooling | 230 V~ 50 Hz

8 592920 021927

P5682 | 1/-/5/20

21 01 104 000 | T80F

---

thermostat type: wire, flow thermostat ▪ type of control: manual thermostat ▪ backlight display ▪ control mode: heating and cooling system ▪ temperature adjustment type: manually ▪ temperature measurement: 5 °C to 80 °C, resolution 0.1 °C ▪ temperature adjustment: from 5 °C up to 80 °C, after 0.1 °C ▪ ON/OFF function ▪ switching: voltage 230 V AC, 50 Hz ▪ switching load: 5 A resistively, 1.5 A inductively ▪ power source: 230 V AC ▪ dimensions: 41 × 50 × 138 mm





5 A/1.5 A | LED indication | Energy saving | 5–80 °C | Heating /Cooling | 230 V~ 50 Hz

8 592920 088302

P5683 | 1/-/5/30

21 01 107 000 | P5683

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number | Packaging Type

thermostat type: wire, capillary sensor thermostat ▪ type of control: manual thermostat ▪ backlight display ▪ control mode: heating and cooling system ▪ temperature adjustment type: manually ▪ temperature measurement: 5 °C to 90 °C, resolution 0.1 °C ▪ temperature adjustment: from 5 °C up to 90 °C, after 0.1 °C ▪ ON/OFF function ▪ switching: voltage 230 V AC, 50 Hz ▪ switching load: 5 A resistively, 1.5 A inductively ▪ capillary sensor length: 0.9 m, Ø 6 mm ▪ power source: 230 V AC ▪ dimensions: 36 × 45 × 138 mm





5 A/1.5 A | LED indication | Energy saving | 5–90 °C | Heating /Cooling | 230 V~ 50 Hz

8 592920 088333

P5684 | 1/-/5/30

21 01 108 000 | P5684

---

thermostat type: wire, flow thermostat ▪ type of control: manual thermostat ▪ control mode: heating and cooling system ▪ temperature measurement: 0 °C to 90 °C ▪ temperature adjustment: 0 °C to 90 °C, resolution 5 °C ▪ switching: voltage 230 V AC, 50 Hz ▪ switching load: 16 A resistive, 4 A inductive ▪ power source: 230 V, 400 V AC ▪ dimensions: 57 × 38 × 108 mm, thermowell: 110 mm, Ø 8 mm, 1/2'' thread





16 A/4 A | Energy saving | 0–90 °C | Heating /Cooling | 230 V~ 50 Hz

8 592920 120934

P5685 | 1/-/5/15

21 01 109 000 | P5685

---

thermostat type: wire, flow thermostat ▪ type of control: manual thermostat ▪ backlight display ▪ control mode: heating and cooling system ▪ temperature adjustment type: manually ▪ temperature measurement: 5 °C to 80 °C, resolution 0.1 °C ▪ temperature adjustment: from 5 °C up to 80 °C, after 0.1 °C ▪ ON/OFF function ▪ switching: voltage 230 V AC, 50 Hz ▪ switching load: 5 A resistively, 1.5 A inductively ▪ power source: 230 V AC ▪ dimensions: 45 × 36 × 140 mm, thermowell: 58 mm, Ø 8 mm, 1/2'' thread





5 A/1.5 A | Energy saving | 5–80 °C | Heating /Cooling | 230 V~ 50 Hz

8 592920 120941

P5686 | 1/-/5/20

21 01 110 000 | P5686

---

thermostat type: wireless with OpenTherm communication ▪ switching: 230 V AC or potential-free ▪ switching load: 16 A resistive, 5 A inductive ▪ power of receiver: 230 V AC ▪ receiver's dimension: 37 × 115 × 91 mm





EASY TO INSTALL | 16 A/5 A | 100 m | OpenTherm | Energy saving | Wireless | 868 MHz | 230 V~ 50 Hz

8 592920 098004

P5611OTR | 1/-/-/36

21 01 308 000 | P5611OTR

---

thermostat type: socket ▪ type of control: programmable electronic indoor thermostat ▪ backlight display ▪ control mode: heating and cooling system ▪ number of programs for thermostat: customisable temperature (6× per day) ▪ temperature adjustment type: 6 temperature changes per day ▪ temperature measurement: 0 °C to 45 °C, resolution 0.1 °C ▪ temperature adjustment: 5 °C to 40 °C, resolution 0.5 °C ▪ adjustable variance of temperature: from 0.2 °C up to 2 °C, after 0.1 °C ▪ number of programs for timer: 24 ▪ number of switching per day for timer: 24 ▪ function to change summer/winter time ▪ countdown function ▪ dimensions: 82 × 62 × 146 mm





Programmable | 16 A/4 A | 5–40 °C | Heating /Cooling | Energy saving | Thermo & Timer | 230 V~

8 592920 115534

P5660FR | 1/-/-/16

21 06 000 100 | P5660FR

EMOS
A brand of legrand

www.emos.eu | Order Code Item Number | Packaging Type

Thermostats GoSmart

EMOS GoSmart

- Reduce heating/cooling costs for buildings
- Individual temperature settings for different rooms
- Set temperature scenarios for specific day and time
- Control all settings from anywhere using the app
- Heating or air conditioning control based on GPS location
- Connection via WIFI or Zigbee protocols
- Compatibility with EMOS GoSmart products and TUYA devices
- Voice control with Google Assistant and Amazon Alexa


Powered by

Works with Amazon Alexa Google Assistant

Download on the App Store | GET IT ON Google Play

---

thermostat type: wire ▪ type of control: programmable electronic room thermostat, option to control via mobile phone (iOS, Android) ▪ backlight display ▪ control mode: heating and cooling system ▪ number of programs: customisable temperature (6× per day) ▪ temperature adjustment type: 6 temperature changes per day ▪ temperature measurement: 0 °C to 40 °C, resolution 0.1 °C ▪ temperature adjustment: from 5 °C up to 35 °C, after 0.5 °C ▪ anti-frost protection ▪ ON/OFF function ▪ holiday mode ▪ switching: voltage 230 V AC, 50 Hz ▪ switching load: 6 A resistive, 2 A inductive ▪ power source: 230 V AC ▪ dimensions: 138 × 88 × 33 mm

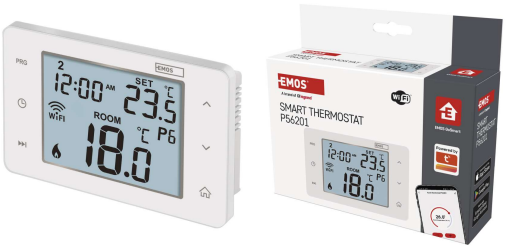

Wi Fi | Regulation based on GPS | Temperature calibration | Touch button control | Energy saving | Backlit display | 5–35 °C | Heating /Cooling | 230 V~ 50 Hz

8 592920 117767

P56201 | 1/-/-/12
21 01 900 000 | P56201

---

thermostat type: wireless ▪ type of control: programmable electronic room thermostat, option to control via mobile phone (iOS, Android) ▪ backlight display ▪ control mode: heating and cooling system ▪ number of programs: customisable temperature (6× per day) ▪ temperature adjustment type: 6 temperature changes per day ▪ temperature measurement: 0 °C to 40 °C, resolution 0.1 °C ▪ temperature adjustment: from 5 °C up to 35 °C, after 0.5 °C ▪ anti-frost protection ▪ ON/OFF function ▪ holiday mode ▪ switching: 230 V AC or potential-free ▪ switching load: 16 A resistive, 4 A inductive ▪ power of transmitter: 5 V USB adapter (included) ▪ power of receiver: 230 V AC ▪ receiver's dimension: 37 × 86 × 86 mm ▪ transmitter's dimension: 40 × 138 × 96 mm



Wi Fi | Regulation based on GPS | Temperature calibration | Touch button control | Energy saving | Backlit display | 5–35 °C | Heating /Cooling | 868 MHz | 16 A/4 A

8 592920 117774

P56211 | 1/-/-/9
21 01 900 001 | P56211

---

thermostat type: wired for underfloor heating, concealed ▪ type of control: programmable electronic room thermostat, option to control via mobile phone (iOS, Android) ▪ backlight display ▪ control mode: heating system ▪ number of programs: customisable temperature (6× per day) ▪ temperature adjustment type: 6 temperature changes per day ▪ temperature measurement: 0 °C to 95 °C, resolution 0.5 °C ▪ temperature adjustment: from 1 °C up to 70 °C, after 0.5 °C ▪ anti-frost protection ▪ ON/OFF function ▪ holiday mode ▪ switching: voltage 230 V AC, 50 Hz ▪ switching load: 16 A resistive ▪ power source: 230 V AC ▪ dimensions: 86 × 86 × 43 mm ▪ part of the package: thermostat, floor sensor 3 m, Ø 8 mm



Wi Fi | Regulation based on GPS | Room & floor sensor | Temperature calibration | Touch button control | Energy saving | 0–95 °C | Heating | 230 V~ 50 Hz

8 592920 117590

P56201UF | 1/-/-/36
21 01 900 002 | P56201UF

---

thermo shut-off valve: SMART, programmable ▪ number of programs: 1 customisable programme or customisable temperature (6× per day) ▪ temperature adjustment type: 6 temperature changes per day ▪ temperature measurement: 0 °C to 70 °C, resolution 0.5 °C ▪ temperature adjustment: 1 °C to 70 °C, resolution 0.5 °C ▪ anti-frost protection ▪ holiday mode ▪ open window function ▪ child lock ▪ matrix: M30 × 1.5 mm ▪ enclosed adaptors: Danfoss RA, RAV, RAVL ▪ power source: 2× 1.5 V AA (included) ▪ dimensions: 55 × 94 × 55 mm ▪ packaging: 1 pc, small box



ZigBee | Regulation based on GPS | Child lock | Open window function | Silent operation | Energy saving | Human detection | 1–70 °C | 2× AA

8 592920 117613

P5630S | 1/-/-/24
21 01 900 003 | P5630S

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

CO and smoke alarms

- life investment for families w/ gas boiler/cooker/fireplace
- CO detector identifies carbon monoxide (invisible, odorless)
- smoke detector alerts to potential fires in the household
- EMOS detectors with 7 or 10 year service life

---

detection type: detector CO ▪ type of installation: possible to mount on the wall or freestanding ▪ type of signaling: optical and audible ▪ operating temperature: -10 °C to 40 °C ▪ operating humidity: 30–95 % ▪ lifetime: 10 years ▪ IP rating: IP30 ▪ power source: 2× 1.5 V AA, included ▪ packaging: 1 pc, small box





EU TESTED VERIFIED | 10 YEARS | EASY TO INSTALL | 2× AA | 85 dB | Low battery warning | End of life warning

8 592920 103364

P56402 1/-/5/15
21 01 501 020 GS827

---

detection type: smoke detector ▪ type of installation: possible to mount on the wall or freestanding ▪ type of signaling: optical and audible ▪ possibility to connect to other detectors: yes, wireless ▪ module range: up to 20 m ▪ transmission frequency: 433 MHz ▪ operating temperature: 10 °C to 45 °C ▪ operating humidity: 30–95 % ▪ lifetime: 10 years ▪ IP rating: IP20 ▪ power source: 2× 1.5 V AA, included ▪ packaging: 1 pc, small box





Wireless Connectable | 10 YEARS | EASY TO INSTALL | 2× AA | 85 dB | Low battery warning | End of life warning | 433.92 MHz

8 592920 036457

P56500 1/-/5/15
21 01 505 000 GS558

---

detection type: smoke detector ▪ type of installation: possible to mount on the wall or freestanding ▪ type of signaling: optical and audible ▪ operating temperature: 0 °C to 40 °C ▪ operating humidity: 5–95 % ▪ lifetime: 10 years ▪ power source: 1× 9 V, included ▪ packaging: 1 pc, small box





10 YEARS | EASY TO INSTALL | 9 V | 85 dB | Low battery warning | End of life warning

8 592920 048634

P56501 1/-/5/40
21 04 101 000 GS536

---

detection type: gas detector ▪ type of installation: possible to mount on the wall or freestanding ▪ type of signaling: optical and audible ▪ operating temperature: -10 °C to 40 °C ▪ operating humidity: 0–95 % ▪ lifetime: 5 years ▪ IP rating: IPX2D ▪ power source: 230 V AC ▪ packaging: 1 pc, small box





5 YEARS | EASY TO INSTALL | 230 V~ 50 Hz | 85 dB | End of life warning

8 592920 076606

P56450 1/-/-/18
21 01 505 003 GS869

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

detection type: smoke detector ▪ type of installation: wall mounting ▪ type of signaling: optical and audible ▪ possibility to connect to other detectors: yes, by wire (max. 40 pcs) ▪ operating temperature: 0 °C to 40 °C ▪ operating humidity: 0–93 % ▪ lifetime: 10 years ▪ power source: 230 V AC, back-up battery: 1× 9 V, included ▪ packaging: 1 pc, small box





10 YEARS | EASY TO INSTALL | 230 V~ | 85 dB | Low battery warning | End of life warning

8 592920 120927

P56502 | 1/-/-/12

21 01 505 006 | TSS890B-HI

---

detection type: heat detector ▪ type of installation: possible to mount on the wall or freestanding ▪ type of signaling: optical and audible ▪ operating temperature: 0 °C to 65 °C ▪ operating humidity: 0–93 % ▪ lifetime: 10 years ▪ power source: 1× 9 V, included ▪ packaging: 1 pc, small box





10 YEARS | EASY TO INSTALL | 9 V | 85 dB | Low battery warning | End of life warning | 1× 9 V included

8 592920 120910

P56300 | 1/-/-/30

21 04 102 000 | THS916A

Valve closer GoSmart

EMOS GoSmart

- Manual and automatic control
- Timer function for setting a schedule
- High power and torque
- Immediate response to crash detection
- Connection to home network via ZIGBEE protocol
- Compatibility with EMOS GoSmart products and TUYA devices
- Voice control with Google Assistant and Amazon Alexa

Powered by

Works with Amazon Alexa Google Assistant

Download on the App Store

GET IT ON Google Play

- product: valve controller
- pipe diameter: 1/2'', 3/4'', 1'' a 1 1/4''
- torque: max. 5.88 Nm
- operating temperature: -10 °C to 55 °C
- operating humidity: <95 %
- IP rating: IP20
- power source: DC 12 V/1 000 mA, 1.4 m (included)
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife

- protocol: Zigbee 3.0
- transmission frequency: 2.4 GHz Wi-Fi
- notifications to the mobile app
- control by voice assistants
- aplication languages: EN, CZ, SK, PL, DE, HU, SI, FR,





ZigBee 3.0 | Water & gas control | Automatic & manual | Timer | Voice control | Energy saving | Silent operation | 12 V DC/ 1 000 mA

8 592920 126202

P5640S | 1/-/-/12

21 05 564 000 | P5640S

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

Detectors GoSmart

EMOS GoSmart

- Detectors to secure your home
- Immediate notification of an unusual situation via the app
- Optical and audible signalling
- Sensors that detect water/gas leaks, fire, etc.
- Connect to your home network via Wi-Fi/ZigBee protocol
- Compatibility with EMOS GoSmart products and TUYA devices
- Voice control with Google Assistant and Amazon Alexa

Powered by

Works with Amazon Alexa Google Assistant

Download on the App Store

GET IT ON Google Play

- detection type: smoke detector
- type of installation: possible to mount on the wall o
- type of signaling: optical and audible
- transmission frequency: 2.4 GHz Wi-Fi
- operating temperature: 0 °C to 40 °C
- operating humidity: 0–93 %
- lifetime: 10 years
- IP rating: IP20
- power source: 2× 1.5 V AA, included
- packaging: 1 pc, small box
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife,
- protocol: Wi-Fi
- notifications to the mobile app
- aplication languages: EN, CZ, SK, PL, DE, HU, SI, FR,





Wi Fi | Real time alert | 10 YEARS Product lifetime | End of life warning | Low battery warning | 85 dB | 2× 1.5 V AA included

8 592920 122143

P56500S | 1/-/-/16
21 04 103 000 | P56500S

- detection type: water leak detector
- type of installation: free-standing
- type of signaling: optical and audible
- memory of alarms
- transmission frequency: Zigbee 3.0
- operating temperature: 5 °C to 38 °C
- operating humidity: ≤80 % without condensation
- lifetime: 10 years
- IP rating: IP65
- power source: 1× 3 V CR2, included
- packaging: 1 pc, small box
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife,
- protocol: Zigbee 3.0
- notifications to the mobile app
- aplication languages: EN, CZ, SK, PL, DE, HU, SI, FR,





ZigBee 3.0 | Real time alert | 10 YEARS Product lifetime | End of life warning | Low battery warning | 85 dB | 1× 3 V CR2 included

8 592920 122136

P56000S | 1/-/-/48
21 04 104 000 | P56000S

- detection type: detector CO
- type of installation: possible to mount on the wall o
- type of signaling: optical and audible
- memory of alarms
- transmission frequency: 2.4 GHz Wi-Fi
- operating temperature: -10 °C to 40 °C
- operating humidity: 15–93 %
- lifetime: 10 years
- IP rating: IP30
- power source: 2× 1.5 V AA, included
- packaging: 1 pc, small box
- supported OS: Android, iOS
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife,
- protocol: Wi-Fi
- notifications to the mobile app
- aplication languages: EN, CZ, SK, PL, DE, HU, SI, FR,





Wi Fi | Real time alert | 10 YEARS Product lifetime | End of life warning | Low battery warning | 85 dB | 2× 1.5 V AA included

8 592920 130780

P56400S | 1/-/-/20
21 04 105 000 | TCS0101W

Installation material, tapes



Installation material

Sockets, switches

EMOS

IP20

- installation: into a junction box
- in white colour
- frame and button material: high-quality polycarbonate (PC)

A6100.0
19 06 200 100
1/-/10/60
W13-C120Y



product: alternating switch no. 6 ▪ type: 250 V~/10 AX ▪ colour: white (gloss) ▪ type of mounting: into a box ▪ IP rating: IP20 ▪ version: 1 button stairway ▪ packaging: 1 pc, hanging

A6100.2
19 06 200 102
1/-/10/60
W13-C210/1Y



product: cross switch no. 7 ▪ type: 250 V~/10 AX ▪ colour: white (gloss) ▪ type of mounting: into a box ▪ IP rating: IP20 ▪ version: 1 button ▪ packaging: 1 pc, hanging

A6100.4
19 06 200 104
1/-/10/60
W13-C130Y



product: switch controller (1/0) ▪ type: 250 V~/10 A ▪ colour: white (gloss) ▪ type of mounting: into a box ▪ IP rating: IP20 ▪ version: 1 button ▪ packaging: 1 pc, hanging

A6100.1
19 06 200 101
1/-/10/60
W13-C210Y



product: parallel switch nr. 5 ▪ type: 250 V~/10 AX ▪ colour: white (gloss) ▪ type of mounting: into a box ▪ IP rating: IP20 ▪ version: 2 buttons ▪ packaging: 1 pc, hanging

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

A6100.3
19 06 200 103
1/-/10/60
W13-C230Y



IP20

product: double two-way switch 6+6 (5B) ▪ type: 250 V~/10 AX ▪ colour: white (gloss) ▪ type of mounting: into a box ▪ IP rating: IP20 ▪ version: 2 buttons ▪ packaging: 1 pc, hanging

A6003.0
19 06 300 103
1/-/10/40
W13-C192



IP20

product: switching device for adjustable LED lamps for turn-controls and button switching ▪ design: 7–110 W/VA vakuové a halogenové žárovky na 230 V~, stmívatelné kompaktní zářivky. 3–60 W/VA pro stmívatelné LED ▪ type: 230 V~, 50 Hz ▪ colour: white (gloss) ▪ version: turn-controls and button switching ▪ packaging: 1 pc, hanging

A6000.5
19 06 010 512
1/-/10/40
W13-C311FUSBAC



1× USB-C
1× USB-A

product: single socket with protective contacts and USB output 3 A max. ▪ design: SCHUKO ▪ type: 250 V~/16 A max. ▪ colour: white (gloss) ▪ type of mounting: into a box (recommended depth min. 60 mm) ▪ IP rating: IP20 ▪ version: single ▪ packaging: 1 pc, PE packet

A6000.1
19 06 010 501
1/-/10/40
W13-311FUSB2A



1×
2× USB
∑ 2.1 A max.

product: single socket with protective side contacts and USB output 2.1 A max. ▪ design: SCHUKO ▪ type: 250 V~/16 A max. ▪ colour: white (gloss) ▪ type of mounting: into a box (recommended depth min. 40 mm) ▪ IP rating: IP20 ▪ version: single ▪ packaging: 1 pc, PE packet


A6004.2
19 06 300 100
1/-/5/30
W13-C004



4×

product: quadruple frame ▪ type: for horizontal and vertical installation ▪ colour: white (gloss) ▪ type of mounting: into a box ▪ version: quadruple ▪ packaging: 1 pc, hanging


A6004.0
19 06 300 102
1/-/10/60
W13-C002



2×

product: double frame ▪ type: for horizontal and vertical installation ▪ colour: white (gloss) ▪ type of mounting: into a box ▪ version: double ▪ packaging: 1 pc, hanging

A6004.1
19 06 300 101
1/-/10/60
W13-C003



3×

product: triple frame ▪ type: for horizontal and vertical installation ▪ colour: white (gloss) ▪ type of mounting: into a box ▪ version: triple ▪ packaging: 1 pc, hanging

A6004.4
19 06 300 105
1/-/10/240
W13-CTF/2



RJ45
2×

product: data socket cover 2×RJ45 ▪ colour: white (gloss) ▪ type of mounting: into a box ▪ version: double ▪ packaging: 1 pc, hanging

A6004.3
19 06 300 104
1/-/10/240
W13-CTRSO



TV/R/SAT

product: socket cover TV+R+SAT ▪ colour: white (gloss) ▪ type of mounting: into a box ▪ version: single ▪ packaging: 1 pc, hanging

A6002.0
19 06 010 504
1/-/10/60
W13-C311



1×

product: single socket with protective side contact ▪ design: SCHUKO ▪ type: 250 V~/16 A max. ▪ colour: white (gloss) ▪ type of mounting: into a box ▪ IP rating: IP20 ▪ version: single ▪ packaging: 1 pc, hanging

EMOS
A brand of legrand

www.emos.eu

Order Code / Item Number | Packaging Type

A6100.5 1/-/10/60
19 06 200 105 W13-C120Y



IP20

product: alternating switch no. 6 ▪ type: 250 V~/10 AX ▪ colour: anthracite ▪ type of mounting: into a box ▪ IP rating: IP20 ▪ version: 1 button stairway ▪ packaging: 1 pc, hanging

A6100.7 1/-/10/60
19 06 200 107 W13-C210/1Y



IP20

product: cross switch no. 7 ▪ type: 250 V~/10 AX ▪ colour: anthracite ▪ type of mounting: into a box ▪ IP rating: IP20 ▪ version: 1 button ▪ packaging: 1 pc, hanging

A6100.9 1/-/10/60
19 06 200 109 W13-C130Y



IP20

product: switch controller (1/0) ▪ type: 250 V~/10 A ▪ colour: anthracite ▪ type of mounting: into a box ▪ IP rating: IP20 ▪ version: 1 button ▪ packaging: 1 pc, hanging

A6100.6 1/-/10/60
19 06 200 106 W13-C210Y



IP20

product: parallel switch nr. 5 ▪ type: 250 V~/10 AX ▪ colour: anthracite ▪ type of mounting: into a box ▪ IP rating: IP20 ▪ version: 2 buttons ▪ packaging: 1 pc, hanging

A6100.8 1/-/10/60
19 06 200 108 W13-C230Y



IP20

product: double two-way switch 6+6 (5B) ▪ type: 250 V~/10 AX ▪ colour: anthracite ▪ type of mounting: into a box ▪ IP rating: IP20 ▪ version: 2 buttons ▪ packaging: 1 pc, hanging

A6003.1 1/-/10/40
19 06 300 109 W13-C192



IP20

product: switching device for adjustable LED lamps for turn-controls and button switching ▪ design: 7–110 W/VA vakuové a halogenové žárovky na 230 V~, stmívatelné kompaktní zářivky. 3–60 W/VA pro stmívatelné LED ▪ type: 230 V~, 50 Hz ▪ colour: anthracite ▪ version: turn-controls and button switching ▪ packaging: 1 pc, hanging

A6000.3 1/-/10/40
19 06 010 507 W13-311FUSB2A



1× | 2× USB ∑ 2.1 A max.

product: single socket with protective side contact and USB output 2.1 A max. ▪ design: SCHUKO ▪ type: 250 V~/16 A max. ▪ colour: anthracite ▪ type of mounting: into a box (recommended depth min. 40 mm) ▪ IP rating: IP20 ▪ version: single ▪ packaging: 1 pc, PE packet


A6002.2 1/-/10/60
19 06 010 510 W13-C311



1×

product: single socket with protective pin and child safety cover ▪ design: SCHUKO ▪ type: 250 V~/16 A max. ▪ colour: anthracite ▪ type of mounting: into a box ▪ IP rating: IP20 ▪ version: single ▪ packaging: 1 pc, hanging

A6004.5 1/-/10/60
19 06 300 108 W13-C002



2×

product: double frame ▪ type: for horizontal and vertical installation ▪ colour: anthracite ▪ type of mounting: into a box ▪ version: double ▪ packaging: 1 pc, hanging

A6004.6 1/-/10/60
19 06 300 107 W13-C003



3×

product: triple frame ▪ type: for horizontal and vertical installation ▪ colour: anthracite ▪ type of mounting: into a box ▪ version: triple ▪ packaging: 1 pc, hanging

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

A6004.7
19 06 300 106

1/-/5/30
W13-C004



8 592920 097250

4×

product: quadruple frame ▪ type: for horizontal and vertical installation ▪ colour: anthracite ▪ type of mounting: into a box ▪ version: quadruple ▪ packaging: 1 pc, hanging

A6004.8
19 06 300 110

1/-/10/240
W13-CTRSO



8 592920 097274

TV/R/SAT

product: socket cover TV+R+SAT ▪ colour: anthracite ▪ type of mounting: into a box ▪ version: single ▪ packaging: 1 pc, hanging

A6004.9
19 06 300 111

1/-/10/240
W13-CTF/2RJ450



8 592920 097281

RJ45
2×

product: data socket cover 2×RJ45 ▪ colour: anthracite ▪ type of mounting: into a box ▪ version: double ▪ packaging: 1 pc, hanging

IP54/IP44

- installation: onto a wall
- enclosure: IP54, IP44
- double socket is internally interconnected

A1398
31 04 139 800

1/5/-/60
EF600SA



8 592920 030868

IP54

product: alternating switch – no. 6 ▪ type: 250 V~/10 AX ▪ colour: grey-black ▪ type of mounting: on the wall ▪ IP rating: IP54 ▪ version: 1 button stairway, waperproof ▪ packaging: 1 pc, PE packet

A1398.1
31 04 139 811

1/5/-/60
EF602S
(EF602SA)



8 592920 030875

IP54

product: serial switch no. 5 (chandelier) ▪ type: 250 V~/10 AX ▪ colour: grey-black ▪ type of mounting: on the wall ▪ IP rating: IP54 ▪ version: 2 buttons classic water-resistant ▪ packaging: 1 pc, PE packet

A1398.2
19 50 011 202

1/5/-/60
EF600SB



8 592920 058497

IP54

product: cross switch no. 7 ▪ type: 250 V~/10 AX ▪ colour: grey-black ▪ type of mounting: on the wall ▪ IP rating: IP54 ▪ version: 1 button ▪ packaging: 1 pc, PE packet

A1399
19 50 011 201

1/5/-/60
EF600SD



8 592920 049747

IP54

product: switch controller (1/0) ▪ type: 250 V~/10 A ▪ colour: grey-black ▪ type of mounting: on the wall ▪ IP rating: IP54 ▪ version: 1 button ▪ packaging: 1 pc, PE packet

EMOS
A brand of legrand

www.emos.eu | Order Code Item Number | Packaging Type

A1396 | 1/5/-/60
31 04 139 600 | EF600G

8 592920 030820

IP44 | 1×



product: socket with earthing pin and lid ▪ design: SCHUKO ▪ type: 250 V~/16 A max. ▪ colour: grey-black ▪ type of mounting: on the wall ▪ IP rating: IP44 ▪ version: single water-resistant ▪ packaging: 1 pc, PE packet

A1396.1 | 1/5/-/25
31 04 139 611 | EF602G

8 592920 030837

IP44 | 2×



product: double socket with earthing pins and lids with interconnection ▪ design: SCHUKO ▪ type: 250 V~/16 A max. ▪ colour: grey-black ▪ type of mounting: on the wall ▪ IP rating: IP44 ▪ version: double water-resistant ▪ packaging: 1 pc, PE packet

A1396.2 | 1/5/-/25
19 50 011 207 | EF600SAG

8 592920 090206

1× | IP44



product: combination of alternating switch nr.6 and socket with earthing pin and lid ▪ design: SCHUKO ▪ type: socket 250 V~/16 A max.; switch 250 V~, 10AX ▪ colour: grey-black ▪ type of mounting: on the wall ▪ IP rating: IP44 ▪ version: double water-resistant - 1× socket + 1× alternating switch ▪ packaging: 1 pc, PE packet

A1398.3 | 1/5/-/60
19 50 011 203 | EF600SA-B

8 592920 074169

IP54



product: alternating switch no. 6 ▪ type: 250 V~/10 AX ▪ colour: white ▪ type of mounting: on the wall ▪ IP rating: IP54 ▪ version: 1 button stairway, waterproof ▪ packaging: 1 pc, PE packet

A1398.4 | 1/5/-/60
19 50 011 204 | EF602S-B

8 592920 074190

IP54



product: serial switch no. 5 (chandelier) ▪ type: 250 V~/10 AX ▪ colour: white ▪ type of mounting: on the wall ▪ IP rating: IP54 ▪ version: 2 buttons classic water-resistant ▪ packaging: 1 pc, PE packet

Scene switches GoSmart

EMOS GoSmart

- Control multiple electrical devices or lights at once
- Define trigger events for individual buttons
- Long power supply battery life - up to 2 years
- Installation without pulling electrical cables
- Three-position buttons - press, double press, long press
- Communication via Zigbee protocol
- Compatible with EMOS GoSmart products and TUYA devices
- Voice control with Google Assistant and Amazon Alexa

Powered by tuya

Works with Amazon Alexa Google Assistant

Download on the App Store | GET IT ON Google Play

- product: IP Smart Scene Switcher
- connectivity: ZigBee 2.4 GHz
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Zigbee 3.0
- pairing: automatic, manual
- use: automation
- number of control buttons: 1
- power supply: CR 2430 3 V
- supported OS: Android, iOS

ZigBee 3.0 | 1× button | 1× CR2430 | Remote control | Mechanical button





8 592920 121221

H5011 | 1/-/-/60
30 69 050 110 | IP-2001ZW

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- product: IP Smart Scene Switcher
- connectivity: ZigBee 2.4 GHz
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Zigbee 3.0
- pairing: automatic, manual
- use: automation
- number of control buttons: 2
- power supply: CR 2430 3 V
- supported OS: Android, iOS

ZigBee 3.0 | 2× button | 1× CR2430 | Remote control | Mechanical button





8 592920 121474

H5012 | 1/-/-/60

30 69 050 120 | IP-2002ZW

- product: IP Smart Scene Switcher
- connectivity: ZigBee 2.4 GHz
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Zigbee 3.0
- pairing: automatic, manual
- use: automation
- number of control buttons: 4
- power supply: CR 2430 3 V
- supported OS: Android, iOS

ZigBee 3.0 | 4× button | 1× CR2430 | Remote control | Mechanical button





8 592920 121498

H5013 | 1/-/-/60

30 69 050 130 | IP-2004ZW

- product: IP Smart Scene Switcher
- connectivity: ZigBee 2.4 GHz
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Zigbee 3.0
- pairing: automatic, manual
- use: automation
- number of control buttons: 1
- power supply: CR 2430 3 V
- supported OS: Android, iOS

ZigBee 3.0 | 1× button | 1× CR2430 | Remote control | Mechanical button





8 592920 121511

H5014 | 1/-/-/60

30 69 050 140 | IP-2001ZB

- product: IP Smart Scene Switcher
- connectivity: ZigBee 2.4 GHz
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Zigbee 3.0
- pairing: automatic, manual
- use: automation
- number of control buttons: 2
- power supply: CR 2430 3 V
- supported OS: Android, iOS

ZigBee 3.0 | 2× button | 1× CR2430 | Remote control | Mechanical button





8 592920 121535

H5015 | 1/-/-/60

30 69 050 150 | IP-2002ZB

- product: IP Smart Scene Switcher
- connectivity: ZigBee 2.4 GHz
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- protocol: Zigbee 3.0
- pairing: automatic, manual
- use: automation
- number of control buttons: 4
- power supply: CR 2430 3 V
- supported OS: Android, iOS

ZigBee 3.0 | 4× button | 1× CR2430 | Remote control | Mechanical button





8 592920 121559

H5016 | 1/-/-/60

30 69 050 160 | IP-2004ZB

EMOS
A brand of legrand

www.emos.eu | Order Code Item Number | Packaging Type

Modules GoSmart

EMOS GoSmart

- Remote control of connected devices
- Integration into home automation
- Variants for connection with or without the need for a neutral wire
- Easy installation under original switches
- Connection to the home network via WIFI/ZigBee protocol
- Compatibility with EMOS GoSmart products and TUYA devices
- Voice control with Google Assistant and Amazon Alexa

Powered by

Works with Amazon Alexa Google Assistant

Download on the App Store | GET IT ON Google Play

- product: IP switching module
- connectivity: ZigBee 2.4 GHz
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- control by voice assistants
- protocol: Zigbee 3.0
- pairing: automatic, manual
- use: indoor
- number of control buttons: 1
- power supply: 230 V~/50 Hz, max. 0,3 W
- supported OS: Android, iOS

ZigBee 3.0





8 592920 126066

H5101 | 1/-/-/100
30 69 051 010 | IP-2101SZ

- product: IP switching module
- connectivity: ZigBee 2.4 GHz
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- control by voice assistants
- protocol: Zigbee 3.0
- pairing: automatic, manual
- use: indoor
- number of control buttons: 1
- power supply: 230 V~/50 Hz, max. 0,3 W
- supported OS: Android, iOS

ZigBee 3.0





8 592920 126042

H5102 | 1/-/-/100
30 69 051 020 | IP-2102SZ

- product: IP switching module
- connectivity: ZigBee 2.4 GHz
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- control by voice assistants
- protocol: Zigbee 3.0
- pairing: automatic, manual
- use: indoor
- number of control buttons: 1
- power supply: 230 V~/50 Hz, max. 0,3 W
- supported OS: Android, iOS

ZigBee 3.0 No Neutral





8 592920 126028

H5103 | 1/-/-/100
30 69 051 030 | IP-2103SZ

- product: IP switching module
- connectivity: ZigBee 2.4 GHz
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- control by voice assistants
- protocol: Zigbee 3.0
- pairing: automatic, manual
- use: indoor
- number of control buttons: 1
- power supply: 230 V~/50 Hz, max. 0,3 W
- supported OS: Android, iOS

ZigBee 3.0 No Neutral





8 592920 126004

H5104 | 1/-/-/100
30 69 051 040 | IP-2104SZ


EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- product: IP switching module
- connectivity: 2.4 GHz WIFI
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- control by voice assistants
- protocol: Wi-Fi
- pairing: automatic, manual
- use: indoor
- number of control buttons: 1
- power supply: 230 V~/50 Hz, max. 0,3 W
- supported OS: Android, iOS





8 592920 125984

H5105 1/-/-/100

30 69 051 050 IP-2101SW

- product: IP switching module
- connectivity: 2.4 GHz WIFI
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- control by voice assistants
- protocol: Wi-Fi
- pairing: automatic, manual
- use: indoor
- number of control buttons: 1
- power supply: 230 V~/50 Hz, max. 0,3 W
- supported OS: Android, iOS






8 592920 125960

H5106 1/-/-/100

30 69 051 060 IP-2102SW

- product: IP dimming module
- connectivity: ZigBee 2.4 GHz
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- control by voice assistants
- protocol: Zigbee 3.0
- pairing: automatic, manual
- use: indoor
- number of control buttons: 1
- power supply: 230 V~/50 Hz, max. 0,3 W
- supported OS: Android, iOS





8 592920 125946

H5107 1/-/-/100

30 69 051 070 IP-2111DZ

- product: IP dimming module
- connectivity: ZigBee 2.4 GHz
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- control by voice assistants
- protocol: Zigbee 3.0
- pairing: automatic, manual
- use: indoor
- number of control buttons: 1
- power supply: 230 V~/50 Hz, max. 0,3 W
- supported OS: Android, iOS






8 592920 125922

H5108 1/-/-/100

30 69 051 080 IP-2112DZ

- product: IP motor module
- connectivity: ZigBee 2.4 GHz
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- control by voice assistants
- protocol: Zigbee 3.0
- pairing: automatic, manual
- use: indoor
- number of control buttons: 1
- power supply: 230 V~/50 Hz, max. 0,3 W
- supported OS: Android, iOS





8 592920 125908

H5109 1/-/-/100

30 69 051 090 IP-2121CZ

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- product: IP motor module
- connectivity: ZigBee 2.4 GHz
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- control by voice assistants
- protocol: Zigbee 3.0
- pairing: automatic, manual
- use: indoor
- number of control buttons: 1
- power supply: 230 V~/50 Hz, max. 0,3 W
- supported OS: Android, iOS

ZigBee 3.0





8 592920 125885

H5110 1/-/-/100

30 69 051 100 IP-2122CZ

- product: IP motor module
- connectivity: 2.4 GHz WIFI
- compatibility: EMOS GoSmart, TUYA, LIDL, Smartlife
- control by voice assistants
- protocol: Wi-Fi/BLE
- pairing: automatic, manual
- use: indoor
- number of control buttons: 1
- power supply: 230 V~/50 Hz, max. 0,3 W
- supported OS: Android, iOS

Wi Fi





8 592920 132326

H5111 1/-/-/32

30 69 051 110 IP-2131SW

Installation material


Terminal blocks

- terminal blocks with brass contacts
- conductor diameter: 12×4mm², 12×6mm², 12×10mm², 12×16mm²
- rated current: 32 A, 41 A, 57 A or 76 A

A4001 10/-/-/800

31 46 000 250 KL 0

8 595025 359025




product: terminal block ▪ for conductor cross-section: 12× 1–4 mm2 ▪ current: 32 A ▪ rated voltage: 450 V~ ▪ packaging: 10 pcs, foil

A4002 10/-/-/500

31 46 000 400 KL 1

8 595025 359049



product: terminal block ▪ for conductor cross-section: 12× 1.5–6 mm2 ▪ current: 41 A ▪ rated voltage: 450 V~ ▪ packaging: 10 pcs, foil

EMOS
A brand of legrand

www.emos.eu


Order Code
Item Number

Packaging
Type

A4003 10/-/-/350

31 46 000 600 KL 2

8 595025 359063




product: terminal block ▪ for conductor cross-section: 12× 2.5–10 mm2 ▪ current: 57 A ▪ rated voltage: 450 V~ ▪ packaging: 10 pcs, foil

A4004 10/-/-/200

31 46 001 600 KL 3

8 595025 359087



product: terminal block ▪ for conductor cross-section: 12× 2.5–16 mm2 ▪ current: 76 A ▪ rated voltage: 450 V~ ▪ packaging: 10 pcs, foil

A4005 1/-/-/300

31 46 010 400 KL 0

8 592920 023099



product: terminal block ▪ for conductor cross-section: 12× 1–4 mm2 ▪ current: 32 A ▪ rated voltage: 450 V~ ▪ packaging: 1 pc, packet

A4006 1/-/-/200

31 46 010 600 KL 1

8 592920 023105



product: terminal block ▪ for conductor cross-section: 12× 1.5–6 mm2 ▪ current: 41 A ▪ rated voltage: 450 V~ ▪ packaging: 1 pc, packet

A4007 1/-/-/150

31 46 011 000 KL 2

8 592920 023112



product: terminal block ▪ for conductor cross-section: 12× 2.5–10 mm2 ▪ current: 57 A ▪ rated voltage: 450 V~ ▪ packaging: 1 pc, packet

Installation material others

- safety plug + key

A9000 1/-/-/12

31 99 900 000 4FF53902.431/S

8 595025 366245



product: 5× safety cap for sockets + key for the cap ▪ type: 4FF53902.431/S ▪ colour: white ▪ type of mounting: into a socket ▪ version: cap for sockets + key for the cap ▪ packaging: 1 pc, hanging

Transformer solders, copper, rosin

- for DIY and professionals, made in Czech Republic
- suitable for so-called soft soldering, welding smaller parts
- with 125 W input power, 4 soldering tips, LED light
- rosin, soldering tip or tin (1.5 mm diameter) also available

A5102 | 1/-/-/6

31 47 010 020 | ETP 5

8 595025 358875



product: transformer soldering iron - LED lighting ▪ number of soldering tips: 4 ▪ power: 125 W ▪ packaging: 1 pc, blister

A5201 | 5/-/-/2 500

31 47 020 010 | HR5 CU

8 595025 358929



product: soldering tip copper for soldering irons 1.3 mm diameter ▪ number of soldering tips: 5 ▪ packaging: 5 pcs, PVC packet

A5301 | 1/-/-/500

31 47 030 010 | KLF 16G

8 595025 358950



product: rosin for soldering ▪ packaging: 1 pc, PVC packet

A5401 | 1/-/-/500

31 47 040 010 | CN 1,5 10G

8 595025 358899



product: tube lead-free solder filled with active rosin Sn99,3Cu0,7Nip, diameter 1,5mm, approx. 1 ▪ packaging: 1 pc, PVC packet

Tapes

Electroinsulating PVC tapes

- width: 15–25 mm, length: 10–20 m, thickness: 0.13 mm
- white, red, black, brown, blue, green, yellow or mix
- meets ROHS and REACH (certification for automotive industry)
- adhesion 1.5 N/10 mm², dielectric strength 40 kV/mm²

- tape type: PVC
- width: 19 mm
- length: 10 m
- thickness: 0.13 mm
- electric strength - minimum: 40 kV/mm
- flame tests: less than 1 second
- recommended storage temperature: 10–45 °C
- installation temperature range: -25–90 °C
- ROHS compliant
- REACH compliant
- UV resistant
- adhesive material: rubber
- intended use: cable insulation
- dimensions: 60 × 20 mm
- packaging: 10 pcs, foil





19 mm | 10 m | EU RoHS REACH | 40.0 kV | -25 – 90 °C

8 595025 342386

F61912 10/-/-/300
20 01 191 020 19/10 CERNA

- tape type: PVC
- width: 25 mm
- length: 10 m
- thickness: 0.13 mm
- electric strength - minimum: 40 kV/mm
- flame tests: less than 1 second
- recommended storage temperature: 10–45 °C
- installation temperature range: -25–90 °C
- ROHS compliant
- REACH compliant
- UV resistant
- adhesive material: rubber
- intended use: cable insulation
- dimensions: 60 × 25 mm
- packaging: 10 pcs, foil





25 mm | 10 m | EU RoHS REACH | 40.0 kV | -25 – 90 °C

8 595025 342461

F62512 10/-/-/300
20 01 251 020 25/10 CERNA

- tape type: PVC
- width: 15 mm
- length: 10 m
- thickness: 0.13 mm
- electric strength - minimum: 40 kV/mm
- flame tests: less than 1 second
- recommended storage temperature: 10–45 °C
- installation temperature range: -25–90 °C
- ROHS compliant
- REACH compliant
- UV resistant
- adhesive material: rubber
- intended use: cable insulation
- dimensions: 60 × 15 mm
- packaging: 10 pcs, foil





15 mm | 10 m | EU RoHS REACH | 40.0 kV | -25 – 90 °C

8 595025 342317

F61511 10/-/-/360
20 01 151 010 15/10 BÍLÁ

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number	Packaging Type

- tape type: PVC
- width: 15 mm
- length: 10 m
- thickness: 0.13 mm
- electric strength - minimum: 40 kV/mm
- flame tests: less than 1 second
- recommended storage temperature: 10–45 °C
- installation temperature range: -25–90 °C
- ROHS compliant
- REACH compliant
- UV resistant
- adhesive material: rubber
- intended use: cable insulation
- dimensions: 60 × 15 mm
- packaging: 10 pcs, foil



15 mm | 10 m | EU RoHS REACH | 40.0 kV | -25 – 90 °C

8 595025 342324

F61512 10/-/-/360
20 01 151 020 15/10 CERNA

- tape type: PVC
- width: 15 mm
- length: 10 m
- thickness: 0.13 mm
- electric strength - minimum: 40 kV/mm
- flame tests: less than 1 second
- recommended storage temperature: 10–45 °C
- installation temperature range: -25–90 °C
- ROHS compliant
- REACH compliant
- UV resistant
- adhesive material: rubber
- intended use: cable insulation
- dimensions: 60 × 15 mm
- packaging: 10 pcs, foil



15 mm | 10 m | EU RoHS REACH | 40.0 kV | -25 – 90 °C

8 595025 342331

F61513 10/-/-/360
20 01 151 030 15/10 CERVENA

- tape type: PVC
- width: 15 mm
- length: 10 m
- thickness: 0.13 mm
- electric strength - minimum: 40 kV/mm
- flame tests: less than 1 second
- recommended storage temperature: 10–45 °C
- installation temperature range: -25–90 °C
- ROHS compliant
- REACH compliant
- UV resistant
- adhesive material: rubber
- intended use: cable insulation
- dimensions: 60 × 15 mm
- packaging: 10 pcs, foil



15 mm | 10 m | EU RoHS REACH | 40.0 kV | -25 – 90 °C

8 595025 342348

F61514 10/-/-/360
20 01 151 040 15/10 MODRA

- tape type: PVC
- width: 15 mm
- length: 10 m
- thickness: 0.13 mm
- electric strength - minimum: 40 kV/mm
- flame tests: less than 1 second
- recommended storage temperature: 10–45 °C
- installation temperature range: -25–90 °C
- ROHS compliant
- REACH compliant
- UV resistant
- adhesive material: rubber
- intended use: cable insulation
- dimensions: 60 × 15 mm
- packaging: 10 pcs, foil



15 mm | 10 m | EU RoHS REACH | 40.0 kV | -25 – 90 °C

8 595025 342355

F61515 10/-/-/360
20 01 151 050 15/10 ZEL/ZLUTA

- tape type: PVC
- width: 15 mm
- length: 10 m
- thickness: 0.13 mm
- electric strength - minimum: 40 kV/mm
- flame tests: less than 1 second
- recommended storage temperature: 10–45 °C
- installation temperature range: -25–90 °C
- ROHS compliant
- REACH compliant
- UV resistant
- adhesive material: rubber
- intended use: cable insulation
- dimensions: 60 × 15 mm
- packaging: 10 pcs, foil



15 mm | 10 m | EU RoHS REACH | 40.0 kV | -25 – 90 °C

8 595025 342362

F61516 10/-/-/360
20 01 151 060 15/10 ZLUTA

EMOS
A brand of legrand

www.emos.eu

Order Code / Item Number | Packaging Type

- tape type: PVC
- width: 15 mm
- length: 10 m
- thickness: 0.13 mm
- electric strength - minimum: 40 kV/mm
- flame tests: less than 1 second
- recommended storage temperature: 10–45 °C
- installation temperature range: -25–90 °C
- ROHS compliant

- REACH compliant
- UV resistant
- adhesive material: rubber
- intended use: cable insulation
- dimensions: 60 × 15 mm
- packaging: 10 pcs, foil



15 mm | 10 m | EU RoHS REACH | 40.0 kV | -25 – 90 °C

8 595025 342379

F61517 | 10/-/-/360
20 01 151 070 | 15/10 HNEDA

- tape type: PVC
- width: 15 mm
- length: 10 m
- thickness: 0.13 mm
- electric strength - minimum: 40 kV/mm
- flame tests: less than 1 second
- recommended storage temperature: 10–45 °C
- installation temperature range: -25–90 °C
- ROHS compliant

- REACH compliant
- UV resistant
- adhesive material: rubber
- intended use: cable insulation
- dimensions: 60 × 15 mm
- packaging: 10 pcs, foil



15 mm | 10 m | EU RoHS REACH | 40.0 kV | -25 – 90 °C

8 592920 055052

F61519 | 10/-/-/360
20 01 151 090 | 15/10 GREEN

- tape type: PVC
- width: 15 mm
- length: 10 m
- thickness: 0.13 mm
- electric strength - minimum: 40 kV/mm
- flame tests: less than 1 second
- recommended storage temperature: 10–45 °C
- installation temperature range: -25–90 °C
- ROHS compliant

- REACH compliant
- UV resistant
- adhesive material: rubber
- intended use: cable insulation
- dimensions: 60 × 150 mm
- packaging: 10 pcs, foil



15 mm | 10 m | EU RoHS REACH | 40.0 kV | -25 – 90 °C

8 592920 091449

F615992 | 10/-/-/360
20 01 151 092 | 15/10 COLOR MIX

- tape type: PVC
- width: 19 mm
- length: 20 m
- thickness: 0.13 mm
- electric strength - minimum: 40 kV/mm
- flame tests: less than 1 second
- recommended storage temperature: 10–45 °C
- installation temperature range: -25–90 °C
- ROHS compliant

- REACH compliant
- UV resistant
- adhesive material: rubber
- intended use: cable insulation
- dimensions: 70 × 20 mm
- packaging: 10 pcs, foil



19 mm | 20 m | EU RoHS REACH | 40.0 kV | -25 – 90 °C

8 595025 342393

F61921 | 10/-/-/200
20 01 192 010 | 19/20 BILA

- tape type: PVC
- width: 19 mm
- length: 20 m
- thickness: 0.13 mm
- electric strength - minimum: 40 kV/mm
- flame tests: less than 1 second
- recommended storage temperature: 10–45 °C
- installation temperature range: -25–90 °C
- ROHS compliant

- REACH compliant
- UV resistant
- adhesive material: rubber
- intended use: cable insulation
- dimensions: 70 × 20 mm
- packaging: 10 pcs, foil



19 mm | 20 m | EU RoHS REACH | 40.0 kV | -25 – 90 °C

8 595025 342409

F61922 | 10/-/-/200
20 01 192 020 | 19/20 CERNA

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- tape type: PVC
- width: 19 mm
- length: 20 m
- thickness: 0.13 mm
- electric strength - minimum: 40 kV/mm
- flame tests: less than 1 second
- recommended storage temperature: 10–45 °C
- installation temperature range: -25–90 °C
- ROHS compliant
- REACH compliant
- UV resistant
- adhesive material: rubber
- intended use: cable insulation
- dimensions: 70 × 20 mm
- packaging: 10 pcs, foil



19 mm | 20 m | EU RoHS REACH | 40.0 kV | -25 – 90 °C

8 595025 342416

F61923 10/-/-/200

20 01 192 030 19/20 CERVENA

- tape type: PVC
- width: 19 mm
- length: 20 m
- thickness: 0.13 mm
- electric strength - minimum: 40 kV/mm
- flame tests: less than 1 second
- recommended storage temperature: 10–45 °C
- installation temperature range: -25–90 °C
- ROHS compliant
- REACH compliant
- UV resistant
- adhesive material: rubber
- intended use: cable insulation
- dimensions: 70 × 20 mm
- packaging: 10 pcs, foil



19 mm | 20 m | EU RoHS REACH | 40.0 kV | -25 – 90 °C

8 595025 342423

F61924 10/-/-/200

20 01 192 040 19/20 MODRA

- tape type: PVC
- width: 19 mm
- length: 20 m
- thickness: 0.13 mm
- electric strength - minimum: 40 kV/mm
- flame tests: less than 1 second
- recommended storage temperature: 10–45 °C
- installation temperature range: -25–90 °C
- ROHS compliant
- REACH compliant
- UV resistant
- adhesive material: rubber
- intended use: cable insulation
- dimensions: 70 × 20 mm
- packaging: 10 pcs, foil



19 mm | 20 m | EU RoHS REACH | 40.0 kV | -25 – 90 °C

8 595025 342430

F61925 10/-/-/200

20 01 192 050 19/20 ZEL/ZLUTA

- tape type: PVC
- width: 19 mm
- length: 20 m
- thickness: 0.13 mm
- electric strength - minimum: 40 kV/mm
- flame tests: less than 1 second
- recommended storage temperature: 10–45 °C
- installation temperature range: -25–90 °C
- ROHS compliant
- REACH compliant
- UV resistant
- adhesive material: rubber
- intended use: cable insulation
- dimensions: 70 × 20 mm
- packaging: 10 pcs, foil



19 mm | 20 m | EU RoHS REACH | 40.0 kV | -25 – 90 °C

8 595025 342447

F61926 10/-/-/200

20 01 192 060 19/20 ZLUTA

- tape type: PVC
- width: 19 mm
- length: 20 m
- thickness: 0.13 mm
- electric strength - minimum: 40 kV/mm
- flame tests: less than 1 second
- recommended storage temperature: 10–45 °C
- installation temperature range: -25–90 °C
- ROHS compliant
- REACH compliant
- UV resistant
- adhesive material: rubber
- intended use: cable insulation
- dimensions: 70 × 20 mm
- packaging: 10 pcs, foil



19 mm | 20 m | EU RoHS REACH | 40.0 kV | -25 – 90 °C

8 592920 056233

F61927 10/-/-/200

20 01 192 070 19/20 BROWN

EMOS
A brand of legrand

www.emos.eu

Order Code
Item Number

Packaging
Type

- tape type: PVC
- width: 19 mm
- length: 20 m
- thickness: 0.13 mm
- electric strength - minimum: 40 kV/mm
- flame tests: less than 1 second
- recommended storage temperature: 10–45 °C
- installation temperature range: -25–90 °C
- ROHS compliant
- REACH compliant
- UV resistant
- adhesive material: rubber
- intended use: cable insulation
- dimensions: 70 × 20 mm
- packaging: 10 pcs, foil



19 mm | 20 m | EU RoHS REACH | 40.0 kV | -25 – 90 °C

8 595025 342454

F61929 | 10/-/-/200
20 01 192 090 | 19/20 ZELENA

- tape type: PVC
- width: 19 mm
- length: 20 m
- thickness: 0.13 mm
- electric strength - minimum: 40 kV/mm
- flame tests: less than 1 second
- recommended storage temperature: 10–45 °C
- installation temperature range: -25–90 °C
- ROHS compliant
- REACH compliant
- UV resistant
- adhesive material: rubber
- intended use: cable insulation
- dimensions: 70 × 200 mm
- packaging: 10 pcs, foil



19 mm | 20 m | EU RoHS REACH | 40.0 kV | -25 – 90 °C

8 592920 091425

F61999 | 10/-/-/200
20 01 192 099 | 19/20 MIX 10KS

Other tapes

- textile, marking and reflective tapes also available
- self-amalgamating tapes: material rubber or silicone
- universal DUCT TAPE: strong, high adhesion, water-tightness
- reflective tapes: increase biker, pedestrian and pram safety
- double-sided acrylic tapes: high adhesion and flexibility

---

tape type: asphalt textile tape ▪ width: 15 mm ▪ length: 15 m ▪ thickness: 0.4 mm ▪ electric strength - minimum: 1 kV/mm ▪ recommended storage temperature: -5 °C to +40 °C ▪ installation temperature range: 5–40 °C ▪ UV resistant ▪ adhesive material: asphalt ▪ integrated textile mesh ▪ dimensions: 80 × 17 mm ▪ packaging: 1 pc, PVC hanging



0.4 mm | 15 mm | 15 m | Water resistance

8 595025 311177

F6515 | 1/-/-/60
20 02 151 520 | 15/15 CERNA

---

tape type: asphalt textile tape ▪ width: 19 mm ▪ length: 10 m ▪ thickness: 0.4 mm ▪ electric strength - minimum: 1 kV/mm ▪ recommended storage temperature: -5 °C to +40 °C ▪ installation temperature range: 5–40 °C ▪ UV resistant ▪ adhesive material: asphalt ▪ integrated textile mesh ▪ dimensions: 70 × 17 mm ▪ packaging: 1 pc, PVC hanging



0.4 mm | 19 mm | 10 m | Water resistance

8 595025 311566

F6910 | 1/-/-/60
20 02 191 020 | 19/10 CERNA

EMOS A brand of legrand

www.emos.eu

Order Code / Item Number | Packaging Type

tape type: self-amalgamating tape ▪ width: 19 mm ▪ length: 10 m ▪ thickness: 0.76 mm ▪ electric strength - minimum: 14 kV/mm ▪ recommended storage temperature: -50 °C to +95 °C ▪ installation temperature range: 5–95 °C ▪ adhesive material: rubber ▪ intended use: sealing, repairs ▪ dimensions: 120 × 20 mm ▪ packaging: 1 pc, paper box





0.76 mm | 19 mm | 10 m | 5–95 °C | 14 kV/mm

8 595025 361554

F51912 | 1/-/5/30

20 03 191 020 | 19/10 SELFFUSING

---

tape type: self-amalgamating tape ▪ width: 25 mm ▪ length: 5 m ▪ thickness: 0.76 mm ▪ electric strength - minimum: 14 kV/mm ▪ recommended storage temperature: -50 °C to +95 °C ▪ installation temperature range: 5–95 °C ▪ adhesive material: rubber ▪ intended use: sealing, repairs ▪ dimensions: 95 × 28 mm ▪ packaging: 1 pc, paper box





0.76 mm | 25 mm | 5 m | 5–95 °C | 14 kV/mm

8 595025 361561

F52502 | 1/-/5/30

20 03 250 520 | 25/5 SELFFUSING

---

tape type: silicone vulcanisation ▪ width: 25 mm ▪ length: 3 m ▪ thickness: 0.60 mm ▪ electric strength - minimum: 8 kV/mm ▪ flame tests: less than 1 second ▪ installation temperature range: -60–260 °C ▪ UV resistant ▪ creates pressure-tight joint ▪ intended use: hobby, workshop, garden, repair in vehicle engine compartment, emergency repair of pipes, hoses ▪ dimensions: 60 × 30 mm ▪ packaging: 1 pc, blister





0.60 mm | 25 mm | 3 m | -60 – 260 °C | UV Resistant | 8 kV/mm

8 592920 033753

F52503 | 1/-/20/80

20 03 250 320 | 25/3 SILICONE

---

tape type: universal adhesive DUCT TAPE ▪ width: 48 mm ▪ length: 10 m ▪ thickness: 0.21 mm ▪ recommended storage temperature: -20 °C to +80 °C ▪ installation temperature range: 5–80 °C ▪ UV resistant ▪ adhesive material: synthetic rubber ▪ intended use: hobby, workshop, garden ▪ integrated textile mesh: 70 fibers ▪ dimensions: 105 × 48 mm ▪ packaging: 10 pcs, display box





0.21 mm | 48 mm | 10 m | 70× | UV Resistant | Non toxic | 5–80 °C

8 592920 036082

F6030 | 10/-/-/50

20 02 502 002 | 48/10 UNITAPE

---

tape type: LDPE (low-density polyethylene) warning tape ▪ width: 75 mm ▪ length: 250 m ▪ thickness: 0.03 mm ▪ recommended storage temperature: 5–30 °C ▪ installation temperature range: 5–30 °C ▪ UV resistant ▪ intended use: border of excavations, demarcation of building spaces, sports tracks, various dangerous locations ▪ dimensions: 140 × 75 mm ▪ packaging: 1 pc, paper unwinding mechanism





0.03 mm | 75 mm | 250 m | 5–30 °C | UV Resistant

8 592920 023662

F87525 | 1/-/-/18

20 04 752 500 | 75/250 BARRIER

EMOS
A brand of legrand

www.emos.eu

Order Code Item Number	Packaging Type

tape type: acrylic double-sided tape ▪ width: 12 mm ▪ length: 3 m ▪ thickness: 1.00 mm ▪ recommended storage temperature: 5–40 °C ▪ installation temperature range: 5–40 °C ▪ UV resistant ▪ adhesive material: acrylic ▪ intended use: hobby, workshop, garden ▪ dimensions: 88 × 12 mm ▪ packaging: 1 pc, blister





1.00 mm | 12 mm | 3 m | 5–40 °C | UV Resistant | max. 2 kg/30 cm | Water resistance

8 592920 033975

F6060 | 1/-/10/60
20 06 000 000 | 12/3 ACRYL

---

tape type: acrylic double-sided tape ▪ width: 18 mm ▪ length: 3 m ▪ thickness: 1.00 mm ▪ recommended storage temperature: 5–40 °C ▪ installation temperature range: 5–40 °C ▪ UV resistant ▪ adhesive material: acrylic ▪ intended use: hobby, workshop, garden ▪ dimensions: 88 × 18 mm ▪ packaging: 1 pc, blister





1.00 mm | 18 mm | 3 m | 5–40 °C | UV Resistant | max. 2 kg/30 cm | Water resistance

8 592920 052860

F6080 | 1/-/10/60
20 06 000 010 | 18/3 ACRYL

---

tape type: reflexive safety tape ▪ width: 25 mm ▪ length: 2 m ▪ thickness: 0.19 mm ▪ recommended storage temperature: -20 °C to +80 °C ▪ installation temperature range: -25–90 °C ▪ UV resistant ▪ adhesive material: rubber ▪ intended use: hobby, cycling, safety element ▪ dimensions: 53 × 53 × 25 mm ▪ packaging: 12 pcs, display box





0.19 mm | 25 mm | 2 m | -25 – 90 °C | UV Resistant | 200 m

8 592920 041055

F6070 | 12/-/-/216
20 05 000 010 | 25/2 REFLEX TAPE

Order Code	Item Number	page
A1396	31 04 139 600	384
A1396.1	31 04 139 611	384
A1396.2	19 50 011 207	384
A1398	31 04 139 800	383
A1398.1	31 04 139 811	383
A1398.2	19 50 011 202	383
A1398.3	19 50 011 203	384
A1398.4	19 50 011 204	384
A1399	19 50 011 201	383
A3004	31 16 300 400	335
A3010	31 16 301 000	335
A3366	31 16 336 600	335
A3369	31 16 336 900	335
A4001	31 46 000 250	388
A4002	31 46 000 400	388
A4003	31 46 000 600	389
A4004	31 46 001 600	389
A4005	31 46 010 400	389
A4006	31 46 010 600	389
A4007	31 46 011 000	389
A5102	31 47 010 020	390
A5201	31 47 020 010	390
A5301	31 47 030 010	390
A5401	31 47 040 010	390
A6000.1	19 06 010 501	381
A6000.3	19 06 010 507	382
A6000.5	19 06 010 512	381
A6002.0	19 06 010 504	381
A6002.2	19 06 010 510	382
A6003.0	19 06 300 103	381
A6003.1	19 06 300 109	382
A6004.0	19 06 300 102	381
A6004.1	19 06 300 101	381
A6004.2	19 06 300 100	381
A6004.3	19 06 300 104	381
A6004.4	19 06 300 105	381
A6004.5	19 06 300 108	382
A6004.6	19 06 300 107	382
A6004.7	19 06 300 106	383
A6004.8	19 06 300 110	383
A6004.9	19 06 300 111	383
A6100.0	19 06 200 100	380
A6100.1	19 06 200 101	380
A6100.2	19 06 200 102	380
A6100.3	19 06 200 103	381
A6100.4	19 06 200 104	380
A6100.5	19 06 200 105	382
A6100.6	19 06 200 106	382
A6100.7	19 06 200 107	382
A6100.8	19 06 200 108	382
A6100.9	19 06 200 109	382
A6110	31 05 213 050	297
A6111	31 05 213 051	297
A6114	31 05 213 054	297
A6115	31 05 213 055	297
A6210	31 06 213 240	296
A6211	31 06 213 241	297
A6212	31 06 213 242	296
A6213	31 06 213 243	297
A6310	31 06 213 150	297
A6311	31 06 213 151	297
A6312	31 06 213 152	297
A6313	31 06 213 153	297
A9000	31 99 900 000	389
B01102	10 13 102 002	38
B0110L	10 13 122 001	39
B01114	10 13 124 200	38
B01118	10 13 128 000	38
B0111G	10 13 121 001	38
B0114T	10 13 101 201	39
B01202	10 13 202 002	39
B0120L	10 13 222 001	40
B01214	10 13 224 200	39
B01218	10 13 228 000	39
B0121G	10 13 221 001	40
B0124T	10 13 201 201	40
B0125T	10 13 800 000	42
B01302	10 13 302 001	40
B01304	10 13 304 001	40
B01312	10 13 322 200	41
B01402	10 13 402 001	41
B01404	10 13 404 001	41
B01412	10 13 422 200	41
B01501	10 13 501 001	41
B01511	10 13 521 200	42
B02112	10 14 122 000	35
B02114	10 13 124 100	35
B02118	10 13 128 100	36
B0211V	10 13 126 000	36
B02212	10 14 222 000	36
B02214	10 13 224 100	36
B02218	10 13 228 100	37
B0221V	10 13 226 000	36
B02312	10 13 322 100	37
B02412	10 13 422 100	37
B02511	10 13 521 100	37
B03112	10 13 122 000	33
B03114	10 13 124 000	33
B0314G	10 17 101 000	34
B03212	10 13 222 000	34
B03214	10 13 224 000	34
B0324G	10 17 201 000	34
B03312	10 13 322 000	34
B03412	10 13 422 000	35
B03511	10 13 521 000	35
B0526B	16 13 052 600	80
B0527B	16 13 052 700	80
B0531B	16 13 053 100	79
B0532B	16 13 053 200	79
B0543B	16 13 054 300	79
B0545B	16 13 054 500	79
B1110	10 11 102 000	45
B11202	10 11 202 001	45
B12104	10 12 104 000	43
B1210F	10 12 109 002	43
B1211	10 12 114 000	43
B1220	10 12 204 000	42
B1220F	10 12 209 002	43
B1221	10 12 214 000	43
B1230	10 12 302 000	44
B1231	10 12 312 000	44
B1240	10 12 402 000	44
B1241	10 12 412 000	44
B1250	10 12 501 000	44
B1251	10 12 511 000	45
B1260	10 12 601 000	45
B1300	10 21 002 315	54
B13001	10 21 002 311	54
B1301	10 21 002 715	55
B13011	10 21 002 711	55
B1302	10 21 001 115	55
B13021	10 21 001 111	55
B1303	10 21 047 612	55
B1305	10 21 091 012	56
B1306	10 21 002 512	56
B1325	10 41 062 511	58
B1376	10 41 007 615	57
B13762	10 41 007 611	56
B13763	10 41 007 601	58
B13861	10 41 018 611	57
B1389	10 41 018 910	57
B13892	10 41 018 911	57
B13921	10 41 019 211	57
B13925	10 41 019 205	58
B13951	10 21 002 911	56
B1501	10 22 000 111	47
B1501E	10 22 000 114	47
B1502	10 22 000 211	47
B1505	10 22 000 511	47
B1506	10 22 000 611	47
B1509	10 22 000 911	46
B15101	10 42 102 511	48
B15112	10 22 000 412	46
B1516	10 42 201 615	50
B15161	10 42 201 611	50
B15163	10 42 201 612	50
B1520	10 42 122 015	49
B15201	10 42 122 011	48
B15212	10 22 000 711	46
B15221	10 42 122 511	49
B15231	10 42 235 411	52
B1525	10 42 202 515	51
B15251	10 42 202 511	50
B15253	10 42 202 512	51
B15254	10 42 202 514	54
B1530	10 42 243 015	53
B15301	10 42 243 011	52
B1532	10 42 203 215	51
B15322	10 42 203 211	51
B15323	10 42 203 212	51
B15324	10 42 203 214	54
B15331	10 42 303 211	53
B15431	10 42 232 511	52
B15441	10 42 233 011	52
B15451	10 42 232 011	52
B15601	10 42 161 611	49
B15651	10 42 121 611	48
B1570	10 42 162 015	49
B15701	10 42 162 011	49
B15711	10 42 103 011	48
B15771	10 42 247 711	53
B1585	10 42 245 015	53
B15851	10 42 245 011	53
B15951	10 42 163 221	50
B24294	10 33 224 170	65
B24294	10 33 224 170	73
B25112	10 32 122 090	63
B25114	10 32 124 090	63
B2511V	10 32 126 090	63
B25162	10 32 122 062	62
B25182	10 32 122 080	62
B25184	10 32 124 081	63
B25212	10 32 222 211	64
B25214	10 32 224 210	64
B2521V	10 32 226 212	64
B25232	10 32 222 131	63
B25272	10 32 222 260	64
B25274	10 32 224 260	64
B2527V	10 32 226 260	65
B2533	10 32 322 301	65
B2543	10 32 422 300	65
B2552	10 32 521 021	65
B26184	10 32 124 080	61
B2618V	10 32 126 080	61
B26204	10 32 224 200	61
B2620V	10 32 226 200	62
B2629	10 32 224 201	62
B3357F1	10 43 035 721	58
B3364F1	10 43 036 431	59
B3377F1	10 43 037 721	59
B3389F1	10 43 038 921	59
B3392F1	10 43 039 221	59
B3510	10 44 001 016	60
B3512	10 44 031 216	60
B3513	10 44 001 316	60
B3575	10 44 067 516	60
B50224	16 04 822 110	75
B50444	16 04 844 110	75
B50449	16 04 844 100	75
B50457	16 04 845 210	75
B50460D	16 04 846 114	75
B50829	16 04 882 110	76
B51214	16 04 821 110	74
B53450	16 04 845 110	74
B53455	16 04 845 111	74
B53457	16 04 845 112	74
B56499	16 04 849 120	73
B6305B	16 11 630 500	77
B6310BE	16 11 631 002	78
B6310BL	16 11 631 001	78
B6310G	16 11 631 000	78
B6320GY	16 11 632 000	78
B7316	13 26 021 605	69
B7332	13 26 023 205	69
B7414	13 32 112 040	68
B7426	13 32 212 030	68
B7811	13 21 112 000	66
B7821	13 21 212 000	66
B7911	13 20 114 000	67
B79118	13 20 118 000	67
B7921	13 20 214 000	67
B79218	13 20 218 000	68
B9641	12 01 000 100	70
B9651	12 01 000 500	70
B9652	12 01 000 600	70
B9653	12 01 000 700	71
B9654	12 01 000 800	71
B9655	12 01 000 900	71
B9656	12 01 000 850	71
B9656V	12 01 004 800	71
B9659	12 01 000 520	70
B9664	12 01 001 800	112
B9672	12 01 002 600	70
B9674	12 01 002 800	71
B9675	12 01 002 900	71
B9679	12 01 003 300	71
B9682	12 01 003 500	70
B9683	12 01 003 600	71
B9684	12 01 003 700	72
B9685	12 01 003 800	72
B9691	12 01 004 300	71
C0024	28 04 000 013	355
C0025	28 04 000 014	355
C0030	28 04 000 030	355
C5109	31 32 510 900	150
D4ZR01	15 50 044 028	22
D4ZR01	15 50 044 028	247
D4ZR02	15 50 044 029	22
D4ZR02	15 50 044 029	248
D4ZR03	15 50 044 030	22
D4ZR03	15 50 044 030	248
D4ZR04	15 50 044 031	22
D4ZR04	15 50 044 031	248
DCCV06	15 50 001 005	250
DCCV07	15 50 001 006	250
DCCV11	15 50 001 010	251
DCCV12	15 50 001 011	251
DCCV13	15 50 001 012	251
DCCV19	15 50 000 056	251
DCCV20	15 50 000 057	251
DCCV21	15 50 001 024	251
DCCV22	15 50 001 029	251
DCLV01	15 50 001 013	250
DCLV02	15 50 001 014	250
DCPM01	15 50 004 000	249
DCPV01	15 50 001 023	249
DCPW01	15 50 000 000	249
DCPW02	15 50 000 001	249
DCPW04	15 50 005 016	250
DCPW07	15 50 005 019	250
DCPZ01	15 50 005 000	249
DCPZ02	15 50 005 001	249
E00387	26 93 000 240	259
E0041	26 03 013 000	256
E0042	26 03 118 000	256
E0086	26 18 002 600	265
E0107	26 03 115 000	255
E0114	26 03 117 000	256
E0117N	26 06 003 000	254
E0121	26 03 016 001	257
E0127	26 03 121 000	256
E0129	26 03 119 002	255
E0202	26 05 004 000	262
E03070	26 93 000 180	259
E0345	26 03 203 000	257
E0352	26 06 166 000	254
E0387	26 06 176 000	254
E0422	26 03 016 002	257
E05018	26 93 000 120	258
E06016	26 93 000 230	259
E06018	26 93 000 220	259
E08400	26 93 000 160	259
E2157	26 03 015 000	262
E3003	26 06 153 000	253
E30300	26 27 303 000	31
E30300	26 27 303 000	264
E3070	26 06 139 000	253
E5080	26 06 169 000	253
E5111	26 06 170 000	253
E6016	26 06 164 000	252
E6018	26 06 162 000	253
E8010	26 06 179 000	255
E8466	26 06 150 000	252
E8471	26 03 014 000	256
E8636	26 03 119 003	257
E8647	26 06 172 000	254
E8670	26 06 174 000	254
EGS0101	26 03 123 000	30
EGS0101	26 03 123 000	258
EGS0102	26 03 122 000	30
EGS0102	26 03 122 000	258
EV012	26 17 001 200	261
EV014	26 17 001 400	260
EV014B	26 17 001 401	260
EV016	26 17 001 600	260
EV020	26 17 002 000	261
EV022	26 17 002 200	261
EV023	26 17 002 300	261
EV025	26 17 002 500	260
EV026	26 17 000 500	261
EV028	26 17 002 800	262
EV029	26 17 002 600	262
EV104	26 17 010 400	263
EV105	26 17 010 500	263
EV106	26 17 010 600	263
EV112	26 17 010 902	32
EV112	26 17 010 902	264
F51912	20 03 191 020	396
F52502	20 03 250 520	396
F52503	20 03 250 320	396
F6030	20 02 502 002	396
F6060	20 06 000 000	397
F6070	20 05 000 010	397
F6080	20 06 000 010	397
F61511	20 01 151 010	391
F61512	20 01 151 020	392
F61513	20 01 151 030	392
F61514	20 01 151 040	392
F61515	20 01 151 050	392
F61516	20 01 151 060	392
F61517	20 01 151 070	393
F61519	20 01 151 090	393
F615992	20 01 151 092	393
F61912	20 01 191 020	391
F61921	20 01 192 010	393
F61922	20 01 192 020	393
F61923	20 01 192 030	394
F61924	20 01 192 040	394
F61925	20 01 192 050	394
F61926	20 01 192 060	394
F61927	20 01 192 070	394
F61929	20 01 192 090	395
F61999	20 01 192 099	395
F62512	20 01 251 020	391
F6515	20 02 151 520	395
F6910	20 02 191 020	395
F87525	20 04 752 500	396
G1110	14 54 007 100	245
G1120	14 54 007 200	245
G1125	14 54 007 250	245
G1130	14 54 008 100	246
G1150	14 54 009 200	246
G1160	14 54 010 100	246
G1180	14 54 012 100	246
G1190	14 54 013 100	247
G1210	14 54 014 100	247
G1240	14 54 015 100	246
H1085	30 10 000 291	353
H1086	30 10 000 292	353
H1141	30 10 001 151	353
H2017	30 10 002 017	353
H2050	30 10 002 050	352
H3010	30 10 003 010	351
H3015	30 10 003 015	351
H3016	30 10 003 016	352
H3017	30 10 003 017	352
H3018	30 10 003 018	352
H3019	30 10 003 019	352
H4020	30 10 040 200	15
H4020	30 10 040 200	354
H4021	30 10 040 210	16
H4021	30 10 040 210	354
H4030	30 10 040 300	16
H4030	30 10 040 300	354
H4031	30 10 040 310	16
H4031	30 10 040 310	354
H4032	30 10 040 320	16
H4032	30 10 040 320	355
H4051	30 24 040 510	13
H4051	30 24 040 510	356
H4052	30 24 040 520	13
H4052	30 24 040 520	356
H4056	30 24 040 560	14
H4056	30 24 040 560	356
H4057	30 24 040 570	14
H4057	30 24 040 570	357
H4058	30 24 040 580	14
H4058	30 24 040 580	357
H4061	30 24 040 610	14
H4061	30 24 040 610	357
H4063	30 24 040 630	15
H4063	30 24 040 630	357
H4064	30 24 040 640	15
H4064	30 24 040 640	357
H4065	30 24 040 650	15
H4065	30 24 040 650	358
H5001	30 69 050 010	24
H5001	30 69 050 010	350
H5011	30 69 050 110	23
H5011	30 69 050 110	384
H5012	30 69 050 120	23
H5012	30 69 050 120	385
H5013	30 69 050 130	23
H5013	30 69 050 130	385
H5014	30 69 050 140	24
H5014	30 69 050 140	385
H5015	30 69 050 150	24
H5015	30 69 050 150	385
H5016	30 69 050 160	24
H5016	30 69 050 160	385
H5020	30 69 052 010	18
H5020	30 69 052 010	365
H5021	30 69 052 020	18
H5021	30 69 052 020	365
H5022	30 69 052 030	25
H5022	30 69 052 030	350
H5023	30 69 050 230	17
H5023	30 69 050 230	355
H5101	30 69 051 010	26
H5101	30 69 051 010	386
H5102	30 69 051 020	26
H5102	30 69 051 020	386
H5103	30 69 051 030	26
H5103	30 69 051 030	386
H5104	30 69 051 040	27
H5104	30 69 051 040	386
H5105	30 69 051 050	27
H5105	30 69 051 050	387
H5106	30 69 051 060	27
H5106	30 69 051 060	387
H5107	30 69 051 070	27
H5107	30 69 051 070	387
H5108	30 69 051 080	27
H5108	30 69 051 080	387
H5109	30 69 051 090	28
H5109	30 69 051 090	387
H5110	30 69 051 100	28
H5110	30 69 051 100	388
H5111	30 69 051 110	28
H5111	30 69 051 110	388
H7009	30 70 000 009	355
H8013	30 80 000 013	355
J0102	25 04 500 110	346
J0103	25 04 600 110	346
J0104	25 04 700 110	346
J0197	25 03 000 100	345
J0198	25 03 000 400	345
J0199	25 04 200 100	345
J0200	25 01 000 100	343
J0203	25 01 000 200	344
J0220J	25 01 100 100	344
J0222	25 01 100 300	344
J0240	25 01 000 300	343
J0240E	25 01 000 330	343
J0260	25 01 000 400	343
J0400	25 06 000 800	347
J0401	25 12 000 100	311
J0665	27 03 105 000	341
J0666	27 03 106 000	341
J0669	27 04 280 010	341
J0680	27 04 030 000	341
J0685	27 02 029 000	339
J0690	27 04 039 000	341
J0701	27 02 031 000	337
J0703	27 02 033 000	337
J0704	27 02 034 000	338
J0705	27 02 035 000	338
J0708	27 02 038 000	338
J0709	27 02 039 000	338
J0801	27 04 310 000	339
J0802	27 04 320 000	339
J0803	27 04 330 000	339
J0804	27 04 340 000	340
J0806	27 04 350 000	340
J0906	27 04 560 000	340
J0907	27 04 570 000	340
J50988	25 20 900 088	342
J50989	25 20 900 089	342
J5709	25 08 000 810	347
J5710	25 08 000 900	347
J5711	25 08 100 100	347
J5712	25 08 100 200	348
J5802	25 07 100 600	346
J5803	25 07 100 700	347
J5810	17 02 010 035	348
J58133	17 02 010 034	348

Order Code	Item Number	page
J60030	25 21 000 030	349
J60110	25 21 000 110	349
J60120	25 21 000 120	349
J60130	25 21 000 130	349
J6014	25 20 236 400	342
J60140	25 21 000 140	349
J60170	25 21 000 170	349
K0101	18 21 000 100	310
K0102	18 21 000 500	311
K0103	18 21 000 700	309
K0141	18 21 000 400	310
K0151	18 21 000 600	310
K0201	18 21 100 100	310
K0202	18 21 100 200	310
K0301	18 21 000 800	311
K0311	18 21 100 300	311
K0312	18 21 100 301	311
K1331	18 04 100 100	312
K1331.2	18 04 100 701	314
K1421	18 04 100 300	312
K1421.2	18 04 100 702	314
K1451	18 04 100 500	312
K1451.2	18 04 100 703	314
K1731	18 04 000 100	312
K1731.2	18 04 000 600	314
K1821	18 04 000 300	312
K1821.2	18 04 000 601	314
K1851	18 04 000 500	312
K1851.2	18 04 000 602	314
K7311	18 07 100 300	312
K7321	18 07 100 400	313
K7321.2	18 07 100 800	314
K7331	18 07 100 500	313
K7331.2	18 07 100 801	314
K7351	18 07 100 700	313
K7351.2	18 07 100 802	315
K9304	18 11 000 200	314
KE1210	32 33 012 100	268
KE1240	32 33 012 400	267
KE1280	32 33 012 800	267
KE1916	32 33 019 160	268
KE2981	32 33 029 810	267
KE4910	32 33 049 100	268
KE4911	32 33 049 110	268
KE4912	32 33 049 120	268
KE4913	32 33 049 130	269
KE4914	32 33 049 140	269
KE6820	32 33 068 200	267
KE7955N	32 33 079 551	269
KT2244	32 32 224 400	266
KT2265	32 32 226 500	265
KT3223	32 32 322 300	266
KT3364	32 32 336 400	266
KT3564	32 32 356 400	266
M0003B	22 01 015 000	370
M0007A	22 05 000 010	369
M0012A	22 01 014 000	369
M0014A	22 01 012 000	369
M0018	22 01 001 000	370
M0048	22 01 002 000	370
M0071	22 01 013 000	369
M0230	22 02 020 000	367
M0305	22 02 015 000	368
M0320	22 02 014 000	367
M0391	22 02 007 000	367
M0400	22 02 013 000	368
M0420	22 02 008 000	366
M0430	22 02 019 000	366
M0501	22 06 000 010	371
M0502	22 06 000 020	371
M0503	22 06 000 030	371
M2092	22 02 003 000	367
M3216	22 02 021 000	368
M3620	22 02 017 000	367
M3691	22 02 016 000	366
N0322	22 03 003 000	370
N1014	16 06 025 000	82
N1015	16 08 000 001	83
N3110	17 03 060 021	82
N3111	17 03 100 021	82
N3112	17 03 150 021	82
N3113	17 03 225 021	81
N9221	16 03 026 000	76
N9321	16 03 027 000	76
N9331	16 03 028 000	76
N9341	16 03 029 000	77
N9361	16 03 030 000	77
P0003C	19 04 030 000	290
P0004C	19 04 040 000	290
P00242	19 25 030 020	292
P00252	19 25 030 030	292
P00262	19 25 030 040	292
P00272	19 25 030 050	292
P00282	19 25 030 060	292
P00292	19 25 030 090	292
P0034	19 06 110 200	291
P0038	19 06 110 300	291
P0039	19 06 100 050	291
P0047	19 26 010 100	291
P0049	19 26 010 200	291
P0050	19 06 100 060	291
P0055N	19 10 000 800	293
P0056N	19 10 000 900	293
P0063	19 05 120 010	292
P0066	19 06 100 090	291
P0068	19 05 111 001	294
P0069	19 05 120 030	295
P0072	19 05 010 003	291
P0120R	19 21 011 002	280
P0121	19 22 010 150	276
P01215R	19 21 011 502	280
P0122	19 21 010 202	280
P01220R	19 21 012 001	280
P01225R	19 21 012 500	280
P01230R	19 21 013 001	281
P0123R	19 21 010 302	280
P0125R	19 21 010 503	280
P0127R	19 21 010 701	280
P01303	19 02 010 300	270
P01320R	19 01 012 016	270
P01510W	19 21 611 000	279
P01520W	19 21 612 000	279
P01805	19 21 010 504	278
P01810	19 21 031 000	278
P01810R	19 21 011 003	278
P01820	19 21 032 000	278
P01825R	19 21 012 502	278
P01830	19 21 033 000	278
P0221U	19 02 020 150	276
P0222CQ	19 22 120 200	277
P0320	19 23 030 000	281
P0321	19 22 030 150	275
P0321R	19 22 030 153	272
P0322	19 22 030 200	275
P0323R	19 22 030 308	272
P0325R	19 22 030 508	272
P0421	19 22 040 150	275
P04219GU	19 22 040 191	276
P0421R	19 22 040 152	272
P0422	19 22 040 400	276
P0423R	19 22 040 302	272
P0425R	19 22 040 502	272
P0520	19 23 050 000	281
P0521	19 22 050 150	275
P0521R	19 22 050 153	272
P0522	19 22 050 201	276
P0523R	19 22 050 308	272
P0525R	19 22 050 508	273
P0621	19 22 060 151	277
P0622	19 22 060 200	275
P0623R	19 22 060 302	273
P0625R	19 22 060 502	273
P0701	19 21 021 000	279
P0702	19 21 021 502	279
P0703	19 21 022 000	279
P0704	19 21 022 502	279
P08215	19 28 441 500	286
P08225	19 28 242 500	287
P08250	19 28 245 000	287
P08620W	19 28 732 000	285
P08625W	19 28 742 500	285
P08650W	19 28 745 000	285
P09220	19 28 142 000	289
P09225	19 28 042 500	289
P092251	19 28 042 504	288
P09225M	19 28 042 501	288
P09240	19 28 044 000	289
P09240M	19 28 044 001	289
P09250	19 28 045 000	289
P092501	19 28 045 003	288
P1320	19 23 130 000	281
P1321	19 22 130 150	275
P1321PD	19 02 330 154	276
P1321R	19 22 130 156	273
P1322	19 22 130 200	275
P1323R	19 22 130 308	273
P1325R	19 22 130 508	273
P14201	19 22 341 000	271
P1421	19 22 140 153	277
P1421R	19 22 140 152	273
P1422	19 22 140 200	275
P14231	19 22 140 302	271
P1423R	19 22 140 303	273
P14251	19 22 340 501	271
P1425R	19 22 140 503	273
P1520	19 23 150 000	281
P1521	19 22 150 155	277
P1521R	19 22 150 154	273
P1522	19 22 150 200	276
P1523CU	19 22 150 306	277
P1523PD	19 22 150 305	277
P1523R	19 22 150 308	274
P1523RU	19 22 150 304	274
P1525R	19 22 150 508	274
P1621	19 22 160 153	277
P1621R	19 22 160 152	274
P1622	19 22 160 200	276
P1623R	19 22 160 302	274
P1625R	19 22 160 502	274
P19220	19 28 545 001	287
P19221	19 28 545 011	287
P19222	19 28 242 502	286
P19223	19 28 245 003	286
P19224	19 28 544 000	286
P192250	19 28 432 500	284
P19427	19 28 042 507	288
P19510	19 28 141 000	290
P19515	19 28 141 500	290
P19625	19 28 542 500	287
P19733	19 28 733 300	284
P2311	14 50 000 370	103
P2312	14 50 000 380	103
P2313	14 50 000 400	103
P2398	14 33 010 008	112
P2399	14 33 010 009	112
P3111	14 40 813 170	92
P3112	14 40 022 200	92
P3113	14 40 012 111	92
P3114	14 40 013 125	92
P3115	14 40 014 100	91
P3116	14 40 011 500	91
P3150	14 40 011 100	91
P3160	14 40 011 203	91
P3170	14 40 013 123	90
P3180	14 50 000 330	90
P3190	14 50 000 340	90
P3210	14 40 004 904	94
P3213	14 40 004 907	95
P3306	14 56 000 060	106
P3310K	14 40 883 200	105
P3311	14 40 004 902	105
P3313	14 56 000 100	106
P3314	14 56 000 110	106
P3315	14 56 000 120	107
P3316	14 56 000 130	107
P3317	14 56 000 140	107
P3318	14 56 000 150	107
P3319	14 56 000 160	107
P3320	14 56 000 170	108
P3380	14 40 013 124	106
P3400	14 40 211 100	94
P3521	14 41 162 100	97
P3528	14 41 203 100	96
P3531	14 41 233 110	96
P3532	14 41 233 120	96
P3534	14 41 250 920	95
P3535	14 41 251 900	95
P3536	14 41 263 110	96
P3537	14 41 273 110	97
P3538	14 41 283 110	108
P3539	14 41 341 100	96
P3540	14 41 212 901	97
P3541	14 41 292 150	95
P3542	14 41 317 000	97
P3819	14 40 033 100	105
P3848A	14 40 093 109	109
P3861	14 40 032 202	94
P3862	14 40 032 400	94
P3887	14 40 812 900	110
P3888	14 40 813 100	102
P3889	14 40 833 100	108
P3894	14 40 813 110	93
P3897	14 40 813 130	109
P3920	14 46 002 000	104
P3921	14 46 002 100	104
P3922	14 46 002 200	104
P3923	14 46 002 300	104
P4006	14 47 003 100	94
P4008	14 47 013 200	93
P4104	14 48 000 040	112
P4112	14 40 833 200	101
P4113	14 40 814 200	101
P4203	14 49 000 030	102
P4205	14 49 000 050	102
P4518	14 50 000 180	100
P4525	14 50 000 240	100
P4531	14 50 000 280	100
P4532	14 50 000 290	100
P4533	14 50 000 300	99
P4534	14 50 000 310	99
P4535	14 40 004 901	100
P4536	14 50 000 320	98
P4537	14 50 000 350	101
P4538	14 50 000 360	101
P4539	14 50 000 390	99
P4540	14 50 000 291	99
P4541	14 50 000 292	99
P4542	14 50 000 420	98
P4543	14 50 000 430	98
P4702	14 40 013 114	93
P4703	14 40 013 115	109
P4704	14 40 813 150	92
P4705	14 40 813 160	109
P4706	14 40 013 116	109
P4710	14 39 011 900	111
P4711	14 39 013 900	111
P4712	14 39 013 901	111
P4713	14 40 812 903	110
P4714	14 50 000 410	110
P4715	14 40 113 100	110
P54212	19 09 040 202	282
P54222	19 09 040 203	282
P54252	19 09 480 301	282
P5521N	19 27 110 012	293
P5522	19 27 010 010	294
P5523N	19 27 010 023	294
P5525	19 27 110 020	294
P5526N	19 27 110 033	294
P5531	19 36 055 310	25
P5531	19 36 055 310	295
P5532	19 36 055 320	25
P5532	19 36 055 320	296
P5533	19 36 553 300	25
P5533	19 36 553 300	296
P5534	19 36 553 400	26
P5534	19 36 553 400	296
P56000S	21 04 104 000	17
P56000S	21 04 104 000	379
P5601UF	21 01 210 000	374
P5603R	21 01 106 001	374
P5604	21 01 106 000	373
P56060T	21 01 208 000	373
P5607	21 01 209 000	373
P56110T	21 01 309 000	372
P56110TR	21 01 308 000	375
P5614	21 01 106 010	373
P56160T	21 01 307 000	373
P56201	21 01 900 000	29
P56201	21 01 900 000	376
P56201UF	21 01 900 002	29
P56201UF	21 01 900 002	376
P56211	21 01 900 001	29
P56211	21 01 900 001	376
P5623	21 01 306 000	372
P56300	21 04 102 000	378
P5630S	21 01 900 003	30
P5630S	21 01 900 003	376
P56400S	21 04 105 000	18
P56400S	21 04 105 000	379
P56402	21 01 501 020	377
P5640S	21 05 564 000	31
P5640S	21 05 564 000	378
P56450	21 01 505 003	377
P56500	21 01 505 000	377
P56500S	21 04 103 000	17
P56500S	21 04 103 000	379
P56501	21 04 101 000	377
P56502	21 01 505 006	378
P5660FR	21 06 000 100	375
P5681	21 01 103 000	374
P5682	21 01 104 000	374
P5683	21 01 107 000	374
P5684	21 01 108 000	375
P5685	21 01 109 000	375
P5686	21 01 110 000	375
P57001	34 01 000 010	364
P57002	34 01 000 020	364
P5705	34 02 005 000	360
P5712	34 02 012 000	360
P5723	34 02 107 000	360
P5723T	34 02 108 000	363
P5727	34 02 025 000	359
P5727T	34 02 112 000	363
P5728	34 02 043 000	360
P5728T	34 02 113 000	363
P5729	34 02 044 000	361
P5729B	34 02 121 000	361
P5729T	34 02 114 000	363
P5730	34 02 115 000	360
P5731	34 02 116 000	361
P5732T	34 02 117 001	364
P5733G	34 02 124 000	362
P5733S	34 02 123 000	361
P5733W	34 02 122 000	361
P5734	34 02 125 000	362
P5734B	34 02 126 000	362
P5734T	34 02 126 001	364
P5750	34 02 118 000	358
P5750.2R	34 02 120 000	359
P5750.2T	34 02 119 000	358
P5750T	34 02 118 001	362
P5760	34 02 060 000	359
P5760T	34 02 060 002	363
P5763	34 02 060 001	359
P5763R	34 02 063 000	359
P5822	19 31 000 020	295
P8105	14 51 710 500	86
P8107	14 51 710 700	86
P8502	14 51 701 200	85
P8504	14 51 703 300	85
P8506	14 51 703 200	84
P8507	14 51 703 110	85
P8508	14 51 703 402	85
P8511	14 51 704 100	84
P8551P	14 51 703 102	88
P8555	14 51 703 500	88
P8566	14 51 085 660	87
P8567	14 51 085 670	87
P8569	14 51 701 900	87
P8571	14 51 704 600	88
P8572	14 51 704 101	88
P8573	14 51 705 300	89
P8574	14 51 705 400	89
P8582	14 51 704 200	89
P8583	14 51 704 300	89
P8584	14 51 704 400	89
PC1321	19 22 330 150	276
PC1321R	19 22 330 152	274
PC1421R	19 22 340 151	274
PC1423R	19 22 340 301	274
PC1425R	19 22 340 502	274
PC1521R	19 22 350 151	275
PC1621R	19 22 360 150	275
PM0902	19 14 071 100	283
PM0904	19 14 071 200	283
PM0905	19 14 071 250	283
PM1102	19 14 081 102	283
PM1103	19 14 081 103	283
PM1104	19 14 081 104	283
PM1105	19 14 081 105	284
PS1721	19 22 570 150	276
R5060	18 04 300 100	312
R5060.2	18 04 300 200	314
R5553	18 07 200 300	313
R5602	18 07 300 100	313
R5602.2	18 07 300 300	315
R5610	18 07 300 200	313
R5610.2	18 07 300 301	315
R5639	18 07 200 100	313
R5639.2	18 07 201 000	315
R5850	18 07 200 500	313
R5850.2	18 07 100 803	315
R5851	18 07 200 600	313
R5852	18 07 200 700	313
R5852.2	18 07 100 804	315
S00003	24 35 724 032	300
S03030	24 21 130 212	298
S03030N	24 21 130 213	298
S03031N	24 21 130 214	298
S03050	24 21 150 212	298
S03050N	24 21 150 213	299
S03130	24 25 130 220	299
S03130N	24 25 130 210	300
S03150	24 25 150 220	299
S03150N	24 25 150 210	300
S03210N	24 25 210 210	300
S03230	24 25 230 220	299
S03230N	24 25 230 210	300
S03250	24 25 250 220	299
S03250N	24 25 250 210	300
S03330	24 21 230 230	298
S03350	24 21 250 230	298
S03430	24 25 430 230	299
S03450	24 25 450 230	299
S08272	24 02 720 132	302
S08273	24 02 730 132	302
S09272	24 02 720 232	302
S09273	24 02 730 232	302
S10000	23 33 101 070	329
S10100	23 33 101 011	328
S10101	23 33 101 016	328
S10102	23 33 101 013	328
S10103	23 33 101 014	328
S10110	23 33 101 015	328
S10300	23 33 101 031	328
S10310	23 33 101 032	328
S10500	23 33 101 051	328
S10510	23 33 101 052	329
S11000	23 33 101 100	329
S1111	24 00 517 252	302
S11370	24 17 715 202	304
S12252	24 01 520 132	301
S14312	24 13 120 132	303
S14313	24 13 130 132	303
S14315	24 13 150 132	303
S14322	24 13 220 132	303
S14323	24 13 230 132	303
S14325	24 13 250 132	303
S14372	24 13 720 132	302
S14373	24 13 730 132	302
S14375	24 13 750 132	303
S15272	24 01 720 132	301
S15273	24 01 730 132	301
S15275	24 01 750 132	301
S18312	24 13 120 232	303
S18313	24 13 130 232	304
S18315	24 13 150 232	304
S18322	24 13 220 232	304
S18323	24 13 230 232	304
S18325	24 13 250 232	304
S18372	24 13 720 232	303
S18373	24 13 730 232	303
S19272	24 01 720 232	301
S19273	24 01 730 232	301
S19275	24 01 750 232	302
S30100	23 33 130 120	329
S30110	23 33 130 121	329
S30200	23 33 130 250	330
S30210	23 33 130 251	330
S30300	23 33 130 350	330
S30310	23 33 130 351	330
S30500	23 33 130 051	329
S30510	23 33 130 052	329
S30700	23 33 130 750	330
S30710	23 33 130 751	330
S31000	23 33 130 101	329
S31010	23 33 130 102	329
S31500	23 33 130 151	329
S31510	23 33 130 152	330
S4001N	23 04 000 101	368
S4003	23 04 000 300	368
S5131	23 05 050 200	322
S5141	23 05 100 200	321
S5194	23 05 059 009	325
S5213	23 05 058 401	320
S5231S	23 05 050 201	322

Order Code	Item Number	page
S5241S	23 05 100 201	322
S5252	23 05 500 000	323
S5253	23 05 500 002	324
S5261	23 05 113 000	320
S5262	23 05 113 002	321
S5265	23 05 113 500	321
S5266	23 05 113 502	321
S5268	23 05 113 003	321
S5269	23 05 113 600	325
S5271	23 05 021 000	322
S5272	23 05 023 000	323
S5273	23 05 021 100	322
S5373	23 05 120 010	324
S5374	23 05 120 020	324
S5375	23 05 120 030	325
S5376	23 05 120 040	325
S5378	23 05 032 010	325
S5381	23 05 130 000	323
S5381E	23 05 130 010	323
S5382	23 05 135 000	324
S5383	23 05 135 010	324
S5385	23 05 120 005	323
S70200	23 33 170 021	330
S70201	23 33 170 022	330
S70202	23 33 170 023	331
S70203	23 33 170 010	330
S8130	23 08 201 550	318
S8131	23 08 201 510	316
S8230	23 08 203 550	318
S8231	23 08 203 510	317
S8250	23 08 205 050	318
S8251	23 08 205 010	317
S8253	23 08 305 050	319
S8270	23 08 207 550	318
S8271	23 08 207 510	317
S8273	23 08 307 550	319
S8280	23 08 210 050	318
S8281	23 08 210 010	317
S8283	23 08 310 050	319
S8290	23 08 215 050	319
S8291	23 08 215 010	317
S8293	23 08 315 050	319
S8307	23 08 207 500	315
S8310	23 08 210 000	316
S8314	23 08 215 000	316
S8324	23 08 225 000	316
S8405	23 08 325 000	316
S9121	23 09 010 010	305
S9122	23 09 010 020	306
S9123	23 09 010 030	307
S9124	23 09 010 040	307
S9125	23 09 010 050	307
S9126	23 09 010 060	307
S9127	23 09 010 070	307
S9128	23 09 010 080	306
S9129	23 09 010 090	306
S9130	23 09 010 100	308
S9131	23 09 020 010	308
S9132	23 09 020 020	308
S9134	23 09 010 120	305
S9221	23 09 110 010	306
S9222	23 09 110 020	306
S9230	23 09 120 010	308
S9310	23 09 130 010	309
S9320	23 09 130 020	309
S9401	23 15 094 010	336
S9402	23 15 094 020	336
S9403	23 15 094 030	336
S9404	23 15 094 040	336
SB3015	23 33 130 150	326
SB3103	23 33 131 030	326
SB3110	23 33 131 100	326
SB3115	23 33 131 150	326
SD3010	23 34 130 100	327
SL0101	23 33 001 010	327
SL0301	23 33 003 010	327
SL2001	23 33 020 010	327
SM5001	23 35 050 010	333
SM5003	23 35 050 030	334
SM5102	23 35 050 020	333
SM5105	23 35 050 050	334
SM7004B	23 35 070 420	331
SM7004W	23 35 070 410	331
SM7008BL	23 35 076 021	334
SM7009BL	23 35 076 020	334
SM7013W	23 35 071 310	333
SM7015W	23 35 076 014	333
SM7021BL	23 35 072 100	332
SM7022BL	23 35 072 200	332
SM7023	23 35 072 310	333
SM7025BL	23 35 072 501	332
SM7025W	23 35 072 500	331
SM7026	23 35 076 011	332
SM7027W	23 35 076 013	332
SM7054	23 35 076 012	334
V0120	17 04 012 000	81
V0122	17 04 012 200	81
V0123	17 04 012 300	80
V0125	17 04 012 500	80
V0219	17 04 021 900	81
V94420	16 06 022 000	112
Z52032	15 25 743 226	124
Z53012	15 25 743 228	123
Z55032	15 25 743 227	123
Z57032	15 25 743 224	123
Z58032	15 25 743 225	124
Z6911	15 24 115 010	150
Z6913	15 24 014 013	149
Z73113	15 35 241 000	153
Z73114	15 35 242 000	153
Z73123	15 35 243 000	153
Z73124	15 35 244 000	153
Z73133	15 35 245 000	154
Z73134	15 35 246 000	154
Z73215	15 35 235 000	151
Z73216	15 35 236 000	152
Z73225	15 35 237 000	152
Z73226	15 35 238 000	152
Z73235	15 35 239 000	152
Z73236	15 35 240 000	152
Z7599B	15 38 150 200	244
Z7599W	15 38 150 201	243
Z7602B	15 38 155 000	243
Z7602BL	15 38 157 000	243
Z7602P	15 38 156 000	243
Z7602W	15 38 154 000	243
Z7609W	15 38 169 000	244
Z7610	15 38 170 000	245
Z7615	15 38 176 000	242
Z7617	15 38 179 000	241
Z7618B	15 38 180 000	241
Z7618W	15 38 181 000	241
Z7619B	15 38 182 000	242
Z7619W	15 38 183 000	242
Z7620B	15 38 184 000	242
Z7620W	15 38 185 000	242
Z7621B	15 38 186 000	244
Z7621BL	15 38 188 000	244
Z7621W	15 38 187 000	244
Z7625	15 38 189 000	239
Z7626	15 38 190 000	239
Z7627	15 38 191 000	240
Z7628B	15 38 193 000	240
Z7628W	15 38 192 000	240
Z7629B	15 38 195 000	240
Z7629W	15 38 194 000	240
Z7630B	15 38 197 000	241
Z7630W	15 38 196 000	241
ZAL192	15 43 191 000	181
ZAL382	15 43 381 000	181
ZALAP	15 43 999 000	181
ZALAR	15 43 999 001	182
ZALAS	15 43 999 002	182
ZALL	15 43 081 000	180
ZALT	15 43 121 000	181
ZALX	15 43 151 000	181
ZB1114	15 44 103 320	183
ZB1124	15 44 103 321	183
ZB1214	15 44 103 628	188
ZB1223	15 44 103 610	188
ZB1224	15 44 103 629	188
ZB1524	15 44 103 322	186
ZB2124	15 44 103 026	185
ZB2154	15 44 103 027	185
ZB2214	15 44 103 622	189
ZB2224	15 44 103 623	189
ZB2414	15 44 103 621	190
ZB3114	15 44 203 320	183
ZB3124	15 44 203 321	183
ZB3214	15 44 103 630	189
ZB3224	15 44 103 631	189
ZB3524	15 44 203 322	186
ZC0105	15 45 000 050	236
ZC0106	15 45 000 060	236
ZC0108	15 45 000 080	235
ZC0109	15 45 000 090	235
ZC0110	15 45 000 100	235
ZC0111	15 45 000 110	236
ZC0114	15 45 000 140	237
ZC0116	15 45 000 160	237
ZC0117	15 45 000 170	237
ZC3000	15 47 300 000	218
ZC3100	15 47 310 000	218
ZD1124	15 40 110 613	220
ZD1125	15 40 110 623	220
ZD1134	15 40 111 214	221
ZD1135	15 40 111 224	221
ZD1144	15 40 111 813	221
ZD1145	15 40 111 823	221
ZD1154	15 40 112 413	221
ZD1155	15 40 112 423	222
ZD1223	15 40 130 670	222
ZD1233	15 40 131 270	222
ZD1243	15 40 131 870	222
ZD1323	15 40 140 670	222
ZD1333	15 40 141 270	223
ZD1343	15 40 141 870	223
ZD1432	15 39 085 090	229
ZD1442	15 39 085 180	229
ZD1452	15 39 085 244	229
ZD2124	15 40 210 612	223
ZD2125	15 40 210 622	223
ZD2134	15 40 211 213	223
ZD2135	15 40 211 223	224
ZD2144	15 40 211 813	224
ZD2145	15 40 211 823	224
ZD2154	15 40 212 413	224
ZD2155	15 40 212 424	224
ZD2223	15 40 230 670	225
ZD2233	15 40 231 270	225
ZD2243	15 40 231 870	225
ZD2323	15 40 240 670	225
ZD2333	15 40 241 270	225
ZD2343	15 40 241 870	226
ZD2432	15 39 085 091	230
ZD2442	15 39 085 181	230
ZD2452	15 39 085 241	230
ZD3121	15 40 115 510	219
ZD3122	15 40 115 570	219
ZD3221	15 40 125 510	219
ZD3222	15 40 125 570	220
ZE0101	15 27 000 800	150
ZE0102	15 27 001 200	151
ZE0203	15 27 101 400	151
ZF1D02	15 25 731 251	119
ZF1D03	15 25 731 448	120
ZF1D22	15 25 731 252	120
ZF1D23	15 25 731 449	120
ZF1D42	15 25 731 253	120
ZF1D43	15 25 731 450	120
ZF2D52	15 25 743 212	122
ZF2D53	15 25 743 405	122
ZF2D62	15 25 743 213	122
ZF2D63	15 25 743 406	122
ZF2D82	15 25 743 214	123
ZF2D83	15 25 743 407	123
ZF3D02	15 25 731 248	121
ZF3D03	15 25 731 445	121
ZF3D22	15 25 731 249	121
ZF3D23	15 25 731 446	121
ZF3D42	15 25 731 250	121
ZF3D43	15 25 731 447	122
ZF5147	15 25 283 273	113
ZF5147.3	15 25 283 274	113
ZF5148	15 25 283 410	114
ZF5148.3	15 25 283 411	114
ZF5154D	15 25 283 277	115
ZF5157	15 25 283 275	114
ZF5157.3	15 25 283 276	114
ZF5158	15 25 283 412	114
ZF5158.3	15 25 283 413	115
ZF5164D	15 25 283 278	116
ZF5167	15 25 283 279	115
ZF5168	15 25 283 417	115
ZF5254D	15 25 283 415	115
ZF5264D	15 25 283 416	116
ZF5D22	15 25 743 203	116
ZF5D23	15 25 733 497	116
ZF5D42	15 25 743 204	116
ZF5D42.2	15 25 743 207	117
ZF5D43	15 25 733 498	117
ZF5D52	15 25 743 205	117
ZF5D53	15 25 733 499	117
ZF5D62	15 25 743 206	117
ZF5D63	15 25 743 400	118
ZF5D82	15 25 743 208	118
ZF5D83	15 25 743 401	118
ZF6D02	15 25 743 209	118
ZF6D03	15 25 743 402	118
ZF6D22	15 25 743 210	119
ZF6D23	15 25 743 403	119
ZF6D42	15 25 743 211	119
ZF6D43	15 25 743 404	119
ZL1F22	15 25 731 246	144
ZL1F42	15 25 731 247	144
ZL1F43	15 25 731 444	145
ZL3F22	15 25 731 244	145
ZL3F42	15 25 731 245	145
ZL3F43	15 25 731 443	145
ZL4206	15 25 653 206	127
ZL4F22	15 25 743 201	145
ZL5F42	15 25 733 296	142
ZL5F42.3	15 25 733 299	142
ZL5F42.6	15 25 743 200	142
ZL5F43	15 25 733 492	143
ZL5F43.3	15 25 733 495	143
ZL5F43.6	15 25 733 496	143
ZL5F52	15 25 743 229	143
ZL5F53	15 25 743 411	143
ZL5F62	15 25 743 230	144
ZL5F63	15 25 743 412	144
ZL6F22	15 25 743 202	144
ZL8F02	15 25 730 234	146
ZL8F03	15 25 730 429	146
ZL8F22	15 25 730 235	146
ZL8F23	15 25 730 430	146
ZM1120	15 39 085 123	214
ZM1121	15 39 085 184	215
ZM1122	15 39 085 245	215
ZM1400	15 39 085 186	215
ZM1401	15 39 085 220	216
ZM1402	15 39 085 187	215
ZM1403	15 39 085 221	216
ZM1404	15 39 085 188	216
ZM1405	15 39 085 222	216
ZM1406	15 39 085 189	216
ZM1407	15 39 085 223	217
ZM3010	15 39 722 000	211
ZM3020	15 39 722 010	211
ZM3130	15 39 071 140	210
ZM3131	15 39 071 240	210
ZM3230	15 39 072 141	210
ZM3231	15 39 072 240	211
ZM3405	15 39 085 050	203
ZM3406	15 39 085 080	203
ZM3407	15 39 085 110	203
ZM3408	15 39 085 122	203
ZM3412	15 39 034 120	208
ZM3413	15 39 034 130	209
ZM4121	15 39 081 150	206
ZM4122	15 39 081 240	206
ZM4123	15 39 081 151	207
ZM4124	15 39 081 241	207
ZM4311	15 39 043 050	209
ZM4312	15 39 043 060	209
ZM4313	15 39 043 070	209
ZM4314	15 39 043 080	210
ZM4321	15 39 082 150	206
ZM4322	15 39 082 240	207
ZM4323	15 39 082 151	207
ZM4324	15 39 082 241	208
ZM4325	15 39 085 360	207
ZM4328	15 39 085 150	208
ZM4329	15 39 085 240	208
ZM4400	15 39 087 170	212
ZM4401	15 39 087 171	212
ZM5123	15 39 087 070	197
ZM5125	15 39 085 070	197
ZM5133	15 39 087 120	197
ZM5135	15 39 085 120	198
ZM5143	15 39 087 210	198
ZM5145	15 39 085 210	198
ZM5153	15 39 087 280	198
ZM5155	15 39 085 280	198
ZM5162	15 39 087 301	195
ZM5163	15 39 087 451	196
ZM5165	15 39 084 002	194
ZM5166	15 39 084 003	194
ZM5167	15 39 087 000	194
ZM5168	15 39 094 300	195
ZM5169	15 39 094 450	195
ZM5171	15 44 101 800	194
ZM5172	15 44 102 400	193
ZM5173	15 44 103 603	193
ZM5191	15 39 087 300	21
ZM5191	15 39 087 300	196
ZM5192	15 39 087 450	21
ZM5192	15 39 087 450	196
ZM5233	15 39 087 121	199
ZM5243	15 39 087 211	199
ZM5253	15 39 087 281	199
ZM5333	15 39 087 122	199
ZM5343	15 39 087 212	199
ZM5353	15 39 087 282	200
ZM5432	15 39 085 092	213
ZM5442	15 39 085 182	213
ZM5452	15 39 085 242	213
ZM6123	15 39 087 071	200
ZM6125	15 39 085 071	200
ZM6133	15 39 087 123	200
ZM6135	15 39 085 121	200
ZM6143	15 39 087 213	201
ZM6145	15 39 085 211	201
ZM6153	15 39 087 283	201
ZM6155	15 39 085 281	201
ZM6233	15 39 087 124	201
ZM6243	15 39 087 214	202
ZM6253	15 39 087 284	202
ZM6333	15 39 087 125	202
ZM6343	15 39 087 215	202
ZM6353	15 39 087 285	202
ZM6432	15 39 085 093	214
ZM6442	15 39 085 183	214
ZM6452	15 39 085 243	214
ZM7150	15 39 087 150	204
ZM7151	15 39 087 180	204
ZM7152	15 39 087 320	205
ZM7153	15 39 087 151	204
ZM7154	15 39 087 181	204
ZM7155	15 39 087 321	205
ZM9000	15 90 900 001	205
ZM9000	15 90 900 001	217
ZM9001	15 90 900 002	205
ZM9001	15 90 900 002	217
ZN1110	15 48 111 000	232
ZN1111	15 48 111 100	232
ZN1112	15 48 111 200	232
ZN1210	15 48 121 000	231
ZN1211	15 48 121 100	231
ZN1310	15 48 131 000	233
ZN1311	15 48 131 100	233
Z00303	15 36 000 000	163
Z00304	15 36 020 000	163
Z00504	15 36 020 001	163
Z00704	15 36 020 002	164
ZQ1D11	15 25 731 230	133
ZQ1D13	15 25 731 429	133
ZQ1E21	15 25 731 240	133
ZQ1E21.3	15 25 731 241	133
ZQ1E23	15 25 731 439	133
ZQ1E23.3	15 25 731 440	134
ZQ1E24	15 25 731 112	134
ZQ1E41	15 25 731 242	134
ZQ1E43	15 25 731 441	134
ZQ1E44	15 25 731 113	134
ZQ3D11	15 25 731 226	135
ZQ3D13	15 25 731 425	136
ZQ3E21	15 25 731 236	136
ZQ3E21.3	15 25 731 237	136
ZQ3E23	15 25 731 435	136
ZQ3E23.3	15 25 731 436	136
ZQ3E24	15 25 731 110	137
ZQ3E41	15 25 731 238	137
ZQ3E43	15 25 731 437	137
ZQ3E44	15 25 731 111	137
ZQ4D11	15 25 733 270	135
ZQ4D13	15 25 733 463	135
ZQ4E21	15 25 733 289	135
ZQ4E23	15 25 733 482	135
ZQ5E21	15 25 733 277	124
ZQ5E23	15 25 733 470	124
ZQ5E31	15 25 733 278	125
ZQ5E33	15 25 733 471	125
ZQ5E41	15 25 733 279	125
ZQ5E41.3	15 25 733 282	125
ZQ5E43	15 25 733 472	125
ZQ5E43.3	15 25 733 475	126
ZQ5E44	15 25 733 121	126
ZQ5E51	15 25 733 280	126
ZQ5E51.3	15 25 733 284	126
ZQ5E53	15 25 733 473	126
ZQ5E53.3	15 25 733 477	127
ZQ5E54	15 25 733 122	127
ZQ5E61	15 25 733 281	127
ZQ5E61.3	15 25 733 285	127
ZQ5E63	15 25 733 474	128
ZQ5E63.3	15 25 733 478	128
ZQ5E64	15 25 733 123	128
ZQ5E71	15 25 733 286	128
ZQ5E73	15 25 733 479	128
ZQ5E74	15 25 733 124	129
ZQ5E81	15 25 733 287	129
ZQ5E83	15 25 733 480	129
ZQ5E84	15 25 733 125	129
ZQ5E91	15 25 743 215	129
ZQ5E93	15 25 743 408	130
ZQ6D11	15 25 733 272	131
ZQ6D13	15 25 733 465	131
ZQ6E21	15 25 733 291	131
ZQ6E21.3	15 25 733 292	131
ZQ6E23	15 25 733 484	131
ZQ6E23.3	15 25 733 485	132
ZQ6E24	15 25 733 126	132
ZQ6E41	15 25 733 293	132
ZQ6E43	15 25 733 486	132
ZQ6E44	15 25 733 127	132
ZQ7E21	15 25 731 243	130
ZQ7E23	15 25 731 442	130
ZQ7E41	15 25 733 294	130
ZQ7E43	15 25 733 487	130
ZQ8155D	15 25 730 221	140
ZQ8155S	15 25 730 220	140
ZQ8255D	15 25 730 416	141
ZQ8255S	15 25 730 415	140
ZQ8338	15 25 730 423	138
ZQ8E12	15 25 730 229	137
ZQ8E12.3	15 25 730 233	138
ZQ8E13	15 25 730 424	138
ZQ8E14	15 25 730 114	139
ZQ8E17	15 25 730 232	138
ZQ8E18	15 25 730 427	138
ZQ8E19	15 25 730 116	139
ZQ8E22	15 25 730 230	139
ZQ8E23	15 25 730 425	139
ZQ8E33N	15 25 730 428	139
ZQ8E42	15 25 730 225	140
ZQ8E42.3	15 25 730 228	140
ZQ8E43	15 25 730 419	141
ZQ8E43.3	15 25 730 422	141
ZQ8E44	15 25 730 112	141
ZQ9125D	15 25 736 211	141
ZQ9140	15 25 731 208	149
ZQ9141	15 25 731 407	150
ZQ9225D	15 25 736 411	142
ZQW322R	15 25 501 500	20
ZQW322R	15 25 501 500	147
ZQW514R	15 20 503 500	19
ZQW514R	15 20 503 500	147
ZQW515R	15 20 503 501	19
ZQW515R	15 20 503 501	147
ZQW516R	15 20 503 502	19
ZQW516R	15 20 503 502	147
ZQW832R	15 25 500 500	20
ZQW832R	15 25 500 500	148
ZQZ322R	15 25 751 500	21
ZQZ322R	15 25 751 500	148
ZQZ514R	15 25 753 500	20
ZQZ514R	15 25 753 500	148
ZQZ515R	15 25 753 501	20
ZQZ515R	15 25 753 501	148
ZQZ516R	15 25 753 502	20
ZQZ516R	15 25 753 502	148
ZQZ832R	15 25 750 500	21
ZQZ832R	15 25 750 500	149
ZR1433	15 44 104 032	182
ZR1532	15 44 104 820	184

Order Code	Item Number	page
ZR1642	15 44 103 428	184
ZR1722	15 44 212 730	185
ZR2212	15 41 181 200	183
ZR5410	15 44 213 670	187
ZR9001	15 42 009 001	191
ZR9002	15 42 009 002	191
ZR9010	15 42 009 010	191
ZR9011	15 42 009 011	191
ZR9020	15 42 009 020	191
ZR9021	15 42 009 021	191
ZR9034	15 42 009 034	192
ZR9035	15 42 009 035	192
ZR9036	15 44 100 000	184
ZR9036	15 44 100 000	192
ZR9041	15 44 300 001	187
ZR9041	15 44 300 001	192
ZR9310	15 48 931 000	234
ZS2110	15 31 211 010	238
ZS2120	15 31 211 020	238
ZS2130	15 31 211 030	238
ZS2140	15 31 211 040	239
ZS2213	15 31 221 300	174
ZS2221.2	15 31 222 120	179
ZS2223	15 31 222 300	174
ZS2231.2	15 31 223 120	179
ZS2233	15 31 223 300	174
ZS2243	15 31 224 300	175
ZS2313	15 31 231 300	175
ZS2323	15 31 232 300	175
ZS2333	15 31 233 300	175
ZS2343	15 31 234 300	175
ZS2413	15 31 241 300	164
ZS2423	15 31 242 300	164
ZS2433	15 31 243 300	165
ZS2443	15 31 244 300	165
ZS2443A	15 31 244 310	165
ZS2453	15 31 245 300	165
ZS2453A	15 31 245 310	165
ZS2463	15 31 246 300	166
ZS2463A	15 31 246 310	166
ZS2473	15 31 247 300	166
ZS2510	15 31 252 510	170
ZS2511	15 31 242 511	172
ZS2520	15 31 252 520	170
ZS2521	15 31 242 521	172
ZS2530	15 31 252 530	170
ZS2531	15 31 242 531	172
ZS2540	15 31 252 540	171
ZS2541	15 31 242 541	172
ZS2612	15 31 242 612	167
ZS2622	15 31 242 622	167
ZS2632	15 31 242 632	167
ZS2642	15 31 242 642	168
ZS2652	15 31 242 652	168
ZS2662	15 31 242 662	168
ZS2672	15 31 242 672	168
ZS2712	15 31 242 712	168
ZS2722	15 31 242 722	169
ZS2732	15 31 242 732	169
ZS2742	15 31 242 742	169
ZS2812	15 31 281 200	179
ZS2822	15 31 282 200	180
ZS2832	15 31 283 200	180
ZS2910	15 31 252 910	171
ZS2911	15 31 242 911	173
ZS2920	15 31 252 920	171
ZS2921	15 31 242 921	173
ZS2930	15 31 252 930	171
ZS2931	15 31 242 931	173
ZS2940	15 31 252 940	171
ZS2941	15 31 242 941	173
ZS3322	15 42 033 220	178
ZS3332	15 42 033 320	178
ZS3342	15 42 033 420	178
ZS3360S	15 42 033 601	177
ZS9010	15 31 900 010	176
ZS9020	15 31 900 020	176
ZS9030	15 31 900 030	176
ZS9510	15 31 950 010	177
ZT1040	15 46 138 800	160
ZT1521	15 46 138 400	159
ZT1521E	15 46 138 401	159
ZT1531	15 46 138 500	160
ZT1621	15 46 138 600	160
ZT1621E	15 46 138 601	160
ZT1631	15 46 138 700	160

Order Code	Item Number	page
ZT3020	15 46 135 700	162
ZT3120	15 46 135 800	162
ZT3220	15 46 135 900	162
ZT4320	15 46 137 700	161
ZT4420	15 46 137 800	161
ZT4520	15 46 137 900	161
ZU083	15 46 138 000	157
ZU133	15 46 138 100	157
ZU166	15 46 138 200	157
ZU225	15 46 138 300	158
ZU310.12	15 46 139 200	155
ZU310.6	15 46 139 000	154
ZU310.9	15 46 139 100	155
ZU315.12	15 46 139 500	155
ZU315.6	15 46 139 300	155
ZU315.9	15 46 139 400	155
ZU320.12	15 46 139 800	156
ZU320.6	15 46 139 600	156
ZU320.9	15 46 139 700	156
ZU9001	15 46 009 001	158
ZU9002	15 46 009 002	158
ZU9003	15 46 009 003	158
ZU9004	15 46 009 004	159
ZU9005	15 46 009 005	159
ZU9902	15 46 009 902	158
ZV1112	15 40 110 621	226
ZV1122	15 40 110 820	226
ZV1132	15 40 111 120	226
ZV1142	15 40 111 520	227
ZV1152	15 40 112 220	227
ZV1160	15 40 116 500	228
ZV1161	15 40 146 500	228
ZV2112	15 40 210 621	227
ZV2122	15 40 210 820	227
ZV2132	15 40 211 120	227
ZV2142	15 40 211 520	228
ZV2152	15 40 212 220	228
ZZ1435T	15 60 014 350	192
ZZ2055T	15 60 020 550	192
ZZ3070T	15 60 030 700	193
ZZ409BD	15 60 040 900	193

Item Number	Order Code	page
10 11 102 000	B1110	45
10 11 202 001	B11202	45
10 12 104 000	B12104	43
10 12 109 002	B1210F	43
10 12 114 000	B1211	43
10 12 204 000	B1220	42
10 12 209 002	B1220F	43
10 12 214 000	B1221	43
10 12 302 000	B1230	44
10 12 312 000	B1231	44
10 12 402 000	B1240	44
10 12 412 000	B1241	44
10 12 501 000	B1250	44
10 12 511 000	B1251	45
10 12 601 000	B1260	45
10 13 101 201	B0114T	39
10 13 102 002	B01102	38
10 13 121 001	B0111G	38
10 13 122 000	B03112	33
10 13 122 001	B0110L	39
10 13 124 000	B03114	33
10 13 124 100	B02114	35
10 13 124 200	B01114	38
10 13 126 000	B0211V	36
10 13 128 000	B01118	38
10 13 128 100	B02118	36
10 13 201 201	B0124T	40
10 13 202 002	B01202	39
10 13 221 001	B0121G	40
10 13 222 000	B03212	34
10 13 222 001	B0120L	40
10 13 224 000	B03214	34
10 13 224 100	B02214	36
10 13 224 200	B01214	39
10 13 226 000	B0221V	36
10 13 228 000	B01218	39
10 13 228 100	B02218	37
10 13 302 001	B01302	40
10 13 304 001	B01304	40
10 13 322 000	B03312	34
10 13 322 100	B02312	37
10 13 322 200	B01312	41
10 13 402 001	B01402	41
10 13 404 001	B01404	41
10 13 422 000	B03412	35
10 13 422 100	B02412	37
10 13 422 200	B01412	41
10 13 501 001	B01501	41
10 13 521 000	B03511	35
10 13 521 100	B02511	37
10 13 521 200	B01511	42
10 13 800 000	B0125T	42
10 14 122 000	B02112	35
10 14 222 000	B02212	36
10 17 101 000	B0314G	34
10 17 201 000	B0324G	34
10 21 001 111	B13021	55
10 21 001 115	B1302	55
10 21 002 311	B13001	54
10 21 002 315	B1300	54
10 21 002 512	B1306	56
10 21 002 711	B13011	55
10 21 002 715	B1301	55
10 21 002 911	B13951	56
10 21 047 612	B1303	55
10 21 091 012	B1305	56
10 22 000 111	B1501	47
10 22 000 114	B1501E	47
10 22 000 211	B1502	47
10 22 000 412	B15112	46
10 22 000 511	B1505	47
10 22 000 611	B1506	47
10 22 000 711	B15212	46
10 22 000 911	B1509	46
10 32 122 062	B25162	62
10 32 122 080	B25182	62
10 32 122 090	B25112	63
10 32 124 080	B26184	61
10 32 124 081	B25184	63
10 32 124 090	B25114	63
10 32 126 080	B2618V	61
10 32 126 090	B2511V	63
10 32 222 131	B25232	63
10 32 222 211	B25212	64
10 32 222 260	B25272	64
10 32 224 200	B26204	61
10 32 224 201	B2629	62
10 32 224 210	B25214	64
10 32 224 260	B25274	64
10 32 226 200	B2620V	62
10 32 226 212	B2521V	64
10 32 226 260	B2527V	65
10 32 322 301	B2533	65
10 32 422 300	B2543	65
10 32 521 021	B2552	65
10 33 224 170	B24294	65
10 33 224 170	B24294	73
10 41 007 601	B13763	58
10 41 007 611	B13762	56
10 41 007 615	B1376	57
10 41 018 611	B13861	57
10 41 018 910	B1389	57
10 41 018 911	B13892	57
10 41 019 205	B13925	58
10 41 019 211	B13921	57
10 41 062 511	B1325	58
10 42 102 511	B15101	48
10 42 103 011	B15711	48
10 42 121 611	B15651	48
10 42 122 011	B15201	48
10 42 122 015	B1520	49
10 42 122 511	B15221	49
10 42 161 611	B15601	49
10 42 162 011	B15701	49
10 42 162 015	B1570	49
10 42 163 221	B15951	50
10 42 201 611	B15161	50
10 42 201 612	B15163	50
10 42 201 615	B1516	50
10 42 202 511	B15251	50
10 42 202 512	B15253	51
10 42 202 514	B15254	54
10 42 202 515	B1525	51
10 42 203 211	B15322	51
10 42 203 212	B15323	51
10 42 203 214	B15324	54
10 42 203 215	B1532	51
10 42 232 011	B15451	52
10 42 232 511	B15431	52
10 42 233 011	B15441	52
10 42 235 411	B15231	52
10 42 243 011	B15301	52
10 42 243 015	B1530	53
10 42 245 011	B15851	53
10 42 245 015	B1585	53
10 42 247 711	B15771	53
10 42 303 211	B15331	53
10 43 035 721	B3357F1	58
10 43 036 431	B3364F1	59
10 43 037 721	B3377F1	59
10 43 038 921	B3389F1	59
10 43 039 221	B3392F1	59
10 44 001 016	B3510	60
10 44 001 316	B3513	60
10 44 031 216	B3512	60
10 44 067 516	B3575	60
12 01 000 100	B9641	70
12 01 000 500	B9651	70
12 01 000 520	B9659	70
12 01 000 600	B9652	70
12 01 000 700	B9653	71
12 01 000 800	B9654	71
12 01 000 850	B9656	71
12 01 000 900	B9655	71
12 01 001 800	B9664	112
12 01 002 600	B9672	70
12 01 002 800	B9674	71
12 01 002 900	B9675	71
12 01 003 300	B9679	71
12 01 003 500	B9682	70
12 01 003 600	B9683	71
12 01 003 700	B9684	72
12 01 003 800	B9685	72
12 01 004 300	B9691	71
12 01 004 800	B9656V	71
13 20 114 000	B7911	67
13 20 118 000	B79118	67
13 20 214 000	B7921	67
13 20 218 000	B79218	68
13 21 112 000	B7811	66
13 21 212 000	B7821	66
13 26 021 605	B7316	69
13 26 023 205	B7332	69
13 32 112 040	B7414	68
13 32 212 030	B7426	68
14 33 010 008	P2398	112
14 33 010 009	P2399	112
14 39 011 900	P4710	111
14 39 013 900	P4711	111
14 39 013 901	P4712	111
14 40 004 901	P4535	100
14 40 004 902	P3311	105
14 40 004 904	P3210	94
14 40 004 907	P3213	95
14 40 011 100	P3150	91
14 40 011 203	P3160	91
14 40 011 500	P3116	91
14 40 012 111	P3113	92
14 40 013 114	P4702	93
14 40 013 115	P4703	109
14 40 013 116	P4706	109
14 40 013 123	P3170	90
14 40 013 124	P3380	106
14 40 013 125	P3114	92
14 40 014 100	P3115	91
14 40 022 200	P3112	92
14 40 032 202	P3861	94
14 40 032 400	P3862	94
14 40 033 100	P3819	105
14 40 093 109	P3848A	109
14 40 113 100	P4715	110
14 40 211 100	P3400	94
14 40 812 900	P3887	110
14 40 812 903	P4713	110
14 40 813 100	P3888	102
14 40 813 110	P3894	93
14 40 813 130	P3897	109
14 40 813 150	P4704	92
14 40 813 160	P4705	109
14 40 813 170	P3111	92
14 40 814 200	P4113	101
14 40 833 100	P3889	108
14 40 833 200	P4112	101
14 40 883 200	P3310K	105
14 41 162 100	P3521	97
14 41 203 100	P3528	96
14 41 212 901	P3540	97
14 41 233 110	P3531	96
14 41 233 120	P3532	96
14 41 250 920	P3534	95
14 41 251 900	P3535	95
14 41 263 110	P3536	96
14 41 273 110	P3537	97
14 41 283 110	P3538	108
14 41 292 150	P3541	95
14 41 317 000	P3542	97
14 41 341 100	P3539	96
14 46 002 000	P3920	104
14 46 002 100	P3921	104
14 46 002 200	P3922	104
14 46 002 300	P3923	104
14 47 003 100	P4006	94
14 47 013 200	P4008	93
14 48 000 040	P4104	112
14 49 000 030	P4203	102
14 49 000 050	P4205	102
14 50 000 180	P4518	100
14 50 000 240	P4525	100
14 50 000 280	P4531	100
14 50 000 290	P4532	100
14 50 000 291	P4540	99
14 50 000 292	P4541	99
14 50 000 300	P4533	99
14 50 000 310	P4534	99
14 50 000 320	P4536	98
14 50 000 330	P3180	90
14 50 000 340	P3190	90
14 50 000 350	P4537	101
14 50 000 360	P4538	101
14 50 000 370	P2311	103
14 50 000 380	P2312	103
14 50 000 390	P4539	99
14 50 000 400	P2313	103
14 50 000 410	P4714	110
14 50 000 420	P4542	98
14 50 000 430	P4543	98
14 51 085 660	P8566	87
14 51 085 670	P8567	87
14 51 701 200	P8502	85
14 51 701 900	P8569	87
14 51 703 102	P8551P	88
14 51 703 110	P8507	85
14 51 703 200	P8506	84
14 51 703 300	P8504	85
14 51 703 402	P8508	85
14 51 703 500	P8555	88
14 51 704 100	P8511	84
14 51 704 101	P8572	88
14 51 704 200	P8582	89
14 51 704 300	P8583	89
14 51 704 400	P8584	89
14 51 704 600	P8571	88
14 51 705 300	P8573	89
14 51 705 400	P8574	89
14 51 710 500	P8105	86
14 51 710 700	P8107	86
14 54 007 100	G1110	245
14 54 007 200	G1120	245
14 54 007 250	G1125	245
14 54 008 100	G1130	246
14 54 009 200	G1150	246
14 54 010 100	G1160	246
14 54 012 100	G1180	246
14 54 013 100	G1190	247
14 54 014 100	G1210	247
14 54 015 100	G1240	246
14 56 000 060	P3306	106
14 56 000 100	P3313	106
14 56 000 110	P3314	106
14 56 000 120	P3315	107
14 56 000 130	P3316	107
14 56 000 140	P3317	107
14 56 000 150	P3318	107
14 56 000 160	P3319	107
14 56 000 170	P3320	108
15 20 503 500	ZQW514R	19
15 20 503 500	ZQW514R	147
15 20 503 501	ZQW515R	19
15 20 503 501	ZQW515R	147
15 20 503 502	ZQW516R	19
15 20 503 502	ZQW516R	147
15 24 014 013	Z6913	149
15 24 115 010	Z6911	150
15 25 283 273	ZF5147	113
15 25 283 274	ZF5147.3	113
15 25 283 275	ZF5157	114
15 25 283 276	ZF5157.3	114
15 25 283 277	ZF5154D	115
15 25 283 278	ZF5164D	116
15 25 283 279	ZF5167	115
15 25 283 410	ZF5148	114
15 25 283 411	ZF5148.3	114
15 25 283 412	ZF5158	114
15 25 283 413	ZF5158.3	115
15 25 283 415	ZF5254D	115
15 25 283 416	ZF5264D	116
15 25 283 417	ZF5168	115
15 25 500 500	ZQW832R	20
15 25 500 500	ZQW832R	148
15 25 501 500	ZQW322R	20
15 25 501 500	ZQW322R	147
15 25 653 206	ZL4206	127
15 25 730 112	ZQ8E44	141
15 25 730 114	ZQ8E14	139
15 25 730 116	ZQ8E19	139
15 25 730 220	ZQ8155S	140
15 25 730 221	ZQ8155D	140
15 25 730 225	ZQ8E42	140
15 25 730 228	ZQ8E42.3	140
15 25 730 229	ZQ8E12	137
15 25 730 230	ZQ8E22	139
15 25 730 232	ZQ8E17	138
15 25 730 233	ZQ8E12.3	138
15 25 730 234	ZL8F02	146
15 25 730 235	ZL8F22	146
15 25 730 415	ZQ8255S	140
15 25 730 416	ZQ8255D	141
15 25 730 419	ZQ8E43	141
15 25 730 422	ZQ8E43.3	141
15 25 730 423	ZQ8338	138
15 25 730 424	ZQ8E13	138
15 25 730 425	ZQ8E23	139
15 25 730 427	ZQ8E18	138
15 25 730 428	ZQ8E33N	139
15 25 730 429	ZL8F03	146
15 25 730 430	ZL8F23	146
15 25 731 110	ZQ3E24	137
15 25 731 111	ZQ3E44	137
15 25 731 112	ZQ1E24	134
15 25 731 113	ZQ1E44	134
15 25 731 208	ZQ9140	149
15 25 731 226	ZQ3D11	135
15 25 731 230	ZQ1D11	133
15 25 731 236	ZQ3E21	136
15 25 731 237	ZQ3E21.3	136
15 25 731 238	ZQ3E41	137
15 25 731 240	ZQ1E21	133
15 25 731 241	ZQ1E21.3	133
15 25 731 242	ZQ1E41	134
15 25 731 243	ZQ7E21	130
15 25 731 244	ZL3F22	145
15 25 731 245	ZL3F42	145
15 25 731 246	ZL1F22	144
15 25 731 247	ZL1F42	144
15 25 731 248	ZF3D02	121
15 25 731 249	ZF3D22	121
15 25 731 250	ZF3D42	121
15 25 731 251	ZF1D02	119
15 25 731 252	ZF1D22	120
15 25 731 253	ZF1D42	120
15 25 731 407	ZQ9141	150
15 25 731 425	ZQ3D13	136
15 25 731 429	ZQ1D13	133
15 25 731 435	ZQ3E23	136
15 25 731 436	ZQ3E23.3	136
15 25 731 437	ZQ3E43	137
15 25 731 439	ZQ1E23	133
15 25 731 440	ZQ1E23.3	134
15 25 731 441	ZQ1E43	134
15 25 731 442	ZQ7E23	130
15 25 731 443	ZL3F43	145
15 25 731 444	ZL1F43	145
15 25 731 445	ZF3D03	121
15 25 731 446	ZF3D23	121
15 25 731 447	ZF3D43	122
15 25 731 448	ZF1D03	120
15 25 731 449	ZF1D23	120
15 25 731 450	ZF1D43	120
15 25 733 121	ZQ5E44	126
15 25 733 122	ZQ5E54	127
15 25 733 123	ZQ5E64	128
15 25 733 124	ZQ5E74	129
15 25 733 125	ZQ5E84	129
15 25 733 126	ZQ6E24	132
15 25 733 127	ZQ6E44	132
15 25 733 270	ZQ4D11	135
15 25 733 272	ZQ6D11	131
15 25 733 277	ZQ5E21	124
15 25 733 278	ZQ5E31	125
15 25 733 279	ZQ5E41	125
15 25 733 280	ZQ5E51	126
15 25 733 281	ZQ5E61	127
15 25 733 282	ZQ5E41.3	125
15 25 733 284	ZQ5E51.3	126
15 25 733 285	ZQ5E61.3	127
15 25 733 286	ZQ5E71	128
15 25 733 287	ZQ5E81	129
15 25 733 289	ZQ4E21	135
15 25 733 291	ZQ6E21	131
15 25 733 292	ZQ6E21.3	131
15 25 733 293	ZQ6E41	132
15 25 733 294	ZQ7E41	130
15 25 733 296	ZL5F42	142
15 25 733 299	ZL5F42.3	142
15 25 733 463	ZQ4D13	135
15 25 733 465	ZQ6D13	131
15 25 733 470	ZQ5E23	124
15 25 733 471	ZQ5E33	125
15 25 733 472	ZQ5E43	125
15 25 733 473	ZQ5E53	126
15 25 733 474	ZQ5E63	128
15 25 733 475	ZQ5E43.3	126
15 25 733 477	ZQ5E53.3	127
15 25 733 478	ZQ5E63.3	128
15 25 733 479	ZQ5E73	128
15 25 733 480	ZQ5E83	129
15 25 733 482	ZQ4E23	135
15 25 733 484	ZQ6E23	131
15 25 733 485	ZQ6E23.3	132
15 25 733 486	ZQ6E43	132
15 25 733 487	ZQ7E43	130
15 25 733 492	ZL5F43	143
15 25 733 495	ZL5F43.3	143
15 25 733 496	ZL5F43.6	143
15 25 733 497	ZF5D23	116
15 25 733 498	ZF5D43	117
15 25 733 499	ZF5D53	117
15 25 736 211	ZQ9125D	141
15 25 736 411	ZQ9225D	142
15 25 743 200	ZL5F42.6	142
15 25 743 201	ZL4F22	145
15 25 743 202	ZL6F22	144
15 25 743 203	ZF5D22	116
15 25 743 204	ZF5D42	116
15 25 743 205	ZF5D52	117
15 25 743 206	ZF5D62	117
15 25 743 207	ZF5D42.2	117
15 25 743 208	ZF5D82	118
15 25 743 209	ZF6D02	118
15 25 743 210	ZF6D22	119
15 25 743 211	ZF6D42	119
15 25 743 212	ZF2D52	122
15 25 743 213	ZF2D62	122
15 25 743 214	ZF2D82	123
15 25 743 215	ZQ5E91	129
15 25 743 224	Z57032	123
15 25 743 225	Z58032	124
15 25 743 226	Z52032	124
15 25 743 227	Z55032	123
15 25 743 228	Z53012	123
15 25 743 229	ZL5F52	143
15 25 743 230	ZL5F62	144
15 25 743 400	ZF5D63	118
15 25 743 401	ZF5D83	118
15 25 743 402	ZF6D03	118
15 25 743 403	ZF6D23	119
15 25 743 404	ZF6D43	119
15 25 743 405	ZF2D53	122
15 25 743 406	ZF2D63	122
15 25 743 407	ZF2D83	123
15 25 743 408	ZQ5E93	130
15 25 743 411	ZL5F53	143
15 25 743 412	ZL5F63	144
15 25 750 500	ZQZ832R	21
15 25 750 500	ZQZ832R	149
15 25 751 500	ZQZ322R	21
15 25 751 500	ZQZ322R	148
15 25 753 500	ZQZ514R	20
15 25 753 500	ZQZ514R	148
15 25 753 501	ZQZ515R	20
15 25 753 501	ZQZ515R	148
15 25 753 502	ZQZ516R	20
15 25 753 502	ZQZ516R	148
15 27 000 800	ZE0101	150
15 27 001 200	ZE0102	151
15 27 101 400	ZE0203	151
15 31 211 010	ZS2110	238
15 31 211 020	ZS2120	238
15 31 211 030	ZS2130	238
15 31 211 040	ZS2140	239
15 31 221 300	ZS2213	174
15 31 222 120	ZS2221.2	179
15 31 222 300	ZS2223	174
15 31 223 120	ZS2231.2	179
15 31 223 300	ZS2233	174
15 31 224 300	ZS2243	175
15 31 231 300	ZS2313	175
15 31 232 300	ZS2323	175
15 31 233 300	ZS2333	175
15 31 234 300	ZS2343	175
15 31 241 300	ZS2413	164
15 31 242 300	ZS2423	164
15 31 242 511	ZS2511	172
15 31 242 521	ZS2521	172
15 31 242 531	ZS2531	172
15 31 242 541	ZS2541	172
15 31 242 612	ZS2612	167
15 31 242 622	ZS2622	167
15 31 242 632	ZS2632	167
15 31 242 642	ZS2642	168
15 31 242 652	ZS2652	168
15 31 242 662	ZS2662	168
15 31 242 672	ZS2672	168
15 31 242 712	ZS2712	168
15 31 242 722	ZS2722	169
15 31 242 732	ZS2732	169

Item Number	Order Code	page
15 31 242 742	ZS2742	169
15 31 242 911	ZS2911	173
15 31 242 921	ZS2921	173
15 31 242 931	ZS2931	173
15 31 242 941	ZS2941	173
15 31 243 300	ZS2433	165
15 31 244 300	ZS2443	165
15 31 244 310	ZS2443A	165
15 31 245 300	ZS2453	165
15 31 245 310	ZS2453A	165
15 31 246 300	ZS2463	166
15 31 246 310	ZS2463A	166
15 31 247 300	ZS2473	166
15 31 252 510	ZS2510	170
15 31 252 520	ZS2520	170
15 31 252 530	ZS2530	170
15 31 252 540	ZS2540	171
15 31 252 910	ZS2910	171
15 31 252 920	ZS2920	171
15 31 252 930	ZS2930	171
15 31 252 940	ZS2940	171
15 31 281 200	ZS2812	179
15 31 282 200	ZS2822	180
15 31 283 200	ZS2832	180
15 31 900 010	ZS9010	176
15 31 900 020	ZS9020	176
15 31 900 030	ZS9030	176
15 31 950 010	ZS9510	177
15 35 235 000	Z73215	151
15 35 236 000	Z73216	152
15 35 237 000	Z73225	152
15 35 238 000	Z73226	152
15 35 239 000	Z73235	152
15 35 240 000	Z73236	152
15 35 241 000	Z73113	153
15 35 242 000	Z73114	153
15 35 243 000	Z73123	153
15 35 244 000	Z73124	153
15 35 245 000	Z73133	154
15 35 246 000	Z73134	154
15 36 000 000	Z00303	163
15 36 020 000	Z00304	163
15 36 020 001	Z00504	163
15 36 020 002	Z00704	164
15 38 150 200	Z7599B	244
15 38 150 201	Z7599W	243
15 38 154 000	Z7602W	243
15 38 155 000	Z7602B	243
15 38 156 000	Z7602P	243
15 38 157 000	Z7602BL	243
15 38 169 000	Z7609W	244
15 38 170 000	Z7610	245
15 38 176 000	Z7615	242
15 38 179 000	Z7617	241
15 38 180 000	Z7618B	241
15 38 181 000	Z7618W	241
15 38 182 000	Z7619B	242
15 38 183 000	Z7619W	242
15 38 184 000	Z7620B	242
15 38 185 000	Z7620W	242
15 38 186 000	Z7621B	244
15 38 187 000	Z7621W	244
15 38 188 000	Z7621BL	244
15 38 189 000	Z7625	239
15 38 190 000	Z7626	239
15 38 191 000	Z7627	240
15 38 192 000	Z7628W	240
15 38 193 000	Z7628B	240
15 38 194 000	Z7629W	240
15 38 195 000	Z7629B	240
15 38 196 000	Z7630W	241
15 38 197 000	Z7630B	241
15 39 034 120	ZM3412	208
15 39 034 130	ZM3413	209
15 39 043 050	ZM4311	209
15 39 043 060	ZM4312	209
15 39 043 070	ZM4313	209
15 39 043 080	ZM4314	210
15 39 071 140	ZM3130	210
15 39 071 240	ZM3131	210
15 39 072 141	ZM3230	210
15 39 072 240	ZM3231	211
15 39 081 150	ZM4121	206
15 39 081 151	ZM4123	207
15 39 081 240	ZM4122	206
15 39 081 241	ZM4124	207

Item Number	Order Code	page
15 39 082 150	ZM4321	206
15 39 082 151	ZM4323	207
15 39 082 240	ZM4322	207
15 39 082 241	ZM4324	208
15 39 084 002	ZM5165	194
15 39 084 003	ZM5166	194
15 39 085 050	ZM3405	203
15 39 085 070	ZM5125	197
15 39 085 071	ZM6125	200
15 39 085 080	ZM3406	203
15 39 085 090	ZD1432	229
15 39 085 091	ZD2432	230
15 39 085 092	ZM5432	213
15 39 085 093	ZM6432	214
15 39 085 110	ZM3407	203
15 39 085 120	ZM5135	198
15 39 085 121	ZM6135	200
15 39 085 122	ZM3408	203
15 39 085 123	ZM1120	214
15 39 085 150	ZM4328	208
15 39 085 180	ZD1442	229
15 39 085 181	ZD2442	230
15 39 085 182	ZM5442	213
15 39 085 183	ZM6442	214
15 39 085 184	ZM1121	215
15 39 085 186	ZM1400	215
15 39 085 187	ZM1402	215
15 39 085 188	ZM1404	216
15 39 085 189	ZM1406	216
15 39 085 210	ZM5145	198
15 39 085 211	ZM6145	201
15 39 085 220	ZM1401	216
15 39 085 221	ZM1403	216
15 39 085 222	ZM1405	216
15 39 085 223	ZM1407	217
15 39 085 240	ZM4329	208
15 39 085 241	ZD2452	230
15 39 085 242	ZM5452	213
15 39 085 243	ZM6452	214
15 39 085 244	ZD1452	229
15 39 085 245	ZM1122	215
15 39 085 280	ZM5155	198
15 39 085 281	ZM6155	201
15 39 085 360	ZM4325	207
15 39 087 000	ZM5167	194
15 39 087 070	ZM5123	197
15 39 087 071	ZM6123	200
15 39 087 120	ZM5133	197
15 39 087 121	ZM5233	199
15 39 087 122	ZM5333	199
15 39 087 123	ZM6133	200
15 39 087 124	ZM6233	201
15 39 087 125	ZM6333	202
15 39 087 150	ZM7150	204
15 39 087 151	ZM7153	204
15 39 087 170	ZM4400	212
15 39 087 171	ZM4401	212
15 39 087 180	ZM7151	204
15 39 087 181	ZM7154	204
15 39 087 210	ZM5143	198
15 39 087 211	ZM5243	199
15 39 087 212	ZM5343	199
15 39 087 213	ZM6143	201
15 39 087 214	ZM6243	202
15 39 087 215	ZM6343	202
15 39 087 280	ZM5153	198
15 39 087 281	ZM5253	199
15 39 087 282	ZM5353	200
15 39 087 283	ZM6153	201
15 39 087 284	ZM6253	202
15 39 087 285	ZM6353	202
15 39 087 300	ZM5191	21
15 39 087 300	ZM5191	196
15 39 087 301	ZM5162	195
15 39 087 320	ZM7152	205
15 39 087 321	ZM7155	205
15 39 087 450	ZM5192	21
15 39 087 450	ZM5192	196
15 39 087 451	ZM5163	196
15 39 094 300	ZM5168	195
15 39 094 450	ZM5169	195
15 39 722 000	ZM3010	211
15 39 722 010	ZM3020	211
15 40 110 613	ZD1124	220
15 40 110 621	ZV1112	226
15 40 110 623	ZD1125	220

Item Number	Order Code	page
15 40 110 820	ZV1122	226
15 40 111 120	ZV1132	226
15 40 111 214	ZD1134	221
15 40 111 224	ZD1135	221
15 40 111 520	ZV1142	227
15 40 111 813	ZD1144	221
15 40 111 823	ZD1145	221
15 40 112 220	ZV1152	227
15 40 112 413	ZD1154	221
15 40 112 423	ZD1155	222
15 40 115 510	ZD3121	219
15 40 115 570	ZD3122	219
15 40 116 500	ZV1160	228
15 40 125 510	ZD3221	219
15 40 125 570	ZD3222	220
15 40 130 670	ZD1223	222
15 40 131 270	ZD1233	222
15 40 131 870	ZD1243	222
15 40 140 670	ZD1323	222
15 40 141 270	ZD1333	223
15 40 141 870	ZD1343	223
15 40 146 500	ZV1161	228
15 40 210 612	ZD2124	223
15 40 210 621	ZV2112	227
15 40 210 622	ZD2125	223
15 40 210 820	ZV2122	227
15 40 211 120	ZV2132	227
15 40 211 213	ZD2134	223
15 40 211 223	ZD2135	224
15 40 211 520	ZV2142	228
15 40 211 813	ZD2144	224
15 40 211 823	ZD2145	224
15 40 212 220	ZV2152	228
15 40 212 413	ZD2154	224
15 40 212 424	ZD2155	224
15 40 230 670	ZD2223	225
15 40 231 270	ZD2233	225
15 40 231 870	ZD2243	225
15 40 240 670	ZD2323	225
15 40 241 270	ZD2333	225
15 40 241 870	ZD2343	226
15 41 181 200	ZR2212	183
15 42 009 001	ZR9001	191
15 42 009 002	ZR9002	191
15 42 009 010	ZR9010	191
15 42 009 011	ZR9011	191
15 42 009 020	ZR9020	191
15 42 009 021	ZR9021	191
15 42 009 034	ZR9034	192
15 42 009 035	ZR9035	192
15 42 033 220	ZS3322	178
15 42 033 320	ZS3332	178
15 42 033 420	ZS3342	178
15 42 033 601	ZS3360S	177
15 43 081 000	ZALL	180
15 43 121 000	ZALT	181
15 43 151 000	ZALX	181
15 43 191 000	ZAL192	181
15 43 381 000	ZAL382	181
15 43 999 000	ZALAP	181
15 43 999 001	ZALAR	182
15 43 999 002	ZALAS	182
15 44 100 000	ZR9036	184
15 44 100 000	ZR9036	192
15 44 101 800	ZM5171	194
15 44 102 400	ZM5172	193
15 44 103 026	ZB2124	185
15 44 103 027	ZB2154	185
15 44 103 320	ZB1114	183
15 44 103 321	ZB1124	183
15 44 103 322	ZB1524	186
15 44 103 428	ZR1642	184
15 44 103 603	ZM5173	193
15 44 103 610	ZB1223	188
15 44 103 621	ZB2414	190
15 44 103 622	ZB2214	189
15 44 103 623	ZB2224	189
15 44 103 628	ZB1214	188
15 44 103 629	ZB1224	188
15 44 103 630	ZB3214	189
15 44 103 631	ZB3224	189
15 44 104 032	ZR1433	182
15 44 104 820	ZR1532	184
15 44 203 320	ZB3114	183
15 44 203 321	ZB3124	183
15 44 203 322	ZB3524	186

Item Number	Order Code	page
15 44 212 730	ZR1722	185
15 44 213 670	ZR5410	187
15 44 300 001	ZR9041	187
15 44 300 001	ZR9041	192
15 45 000 050	ZC0105	236
15 45 000 060	ZC0106	236
15 45 000 080	ZC0108	235
15 45 000 090	ZC0109	235
15 45 000 100	ZC0110	235
15 45 000 110	ZC0111	236
15 45 000 140	ZC0114	237
15 45 000 160	ZC0116	237
15 45 000 170	ZC0117	237
15 46 009 001	ZU9001	158
15 46 009 002	ZU9002	158
15 46 009 003	ZU9003	158
15 46 009 004	ZU9004	159
15 46 009 005	ZU9005	159
15 46 009 902	ZU9902	158
15 46 135 700	ZT3020	162
15 46 135 800	ZT3120	162
15 46 135 900	ZT3220	162
15 46 137 700	ZT4320	161
15 46 137 800	ZT4420	161
15 46 137 900	ZT4520	161
15 46 138 000	ZU083	157
15 46 138 100	ZU133	157
15 46 138 200	ZU166	157
15 46 138 300	ZU225	158
15 46 138 400	ZT1521	159
15 46 138 401	ZT1521E	159
15 46 138 500	ZT1531	160
15 46 138 600	ZT1621	160
15 46 138 601	ZT1621E	160
15 46 138 700	ZT1631	160
15 46 138 800	ZT1040	160
15 46 139 000	ZU310.6	154
15 46 139 100	ZU310.9	155
15 46 139 200	ZU310.12	155
15 46 139 300	ZU315.6	155
15 46 139 400	ZU315.9	155
15 46 139 500	ZU315.12	155
15 46 139 600	ZU320.6	156
15 46 139 700	ZU320.9	156
15 46 139 800	ZU320.12	156
15 47 300 000	ZC3000	218
15 47 310 000	ZC3100	218
15 48 111 000	ZN1110	232
15 48 111 100	ZN1111	232
15 48 111 200	ZN1112	232
15 48 121 000	ZN1210	231
15 48 121 100	ZN1211	231
15 48 131 000	ZN1310	233
15 48 131 100	ZN1311	233
15 48 931 000	ZR9310	234
15 50 000 000	DCPW01	249
15 50 000 001	DCPW02	249
15 50 000 056	DCCV19	251
15 50 000 057	DCCV20	251
15 50 001 005	DCCV06	250
15 50 001 006	DCCV07	250
15 50 001 010	DCCV11	251
15 50 001 011	DCCV12	251
15 50 001 012	DCCV13	251
15 50 001 013	DCLV01	250
15 50 001 014	DCLV02	250
15 50 001 023	DCPV01	249
15 50 001 024	DCCV21	251
15 50 001 029	DCCV22	251
15 50 004 000	DCPM01	249
15 50 005 000	DCPZ01	249
15 50 005 001	DCPZ02	249
15 50 005 016	DCPW04	250
15 50 005 019	DCPW07	250
15 50 044 028	D4ZR01	22
15 50 044 028	D4ZR01	247
15 50 044 029	D4ZR02	22
15 50 044 029	D4ZR02	248
15 50 044 030	D4ZR03	22
15 50 044 030	D4ZR03	248
15 50 044 031	D4ZR04	22
15 50 044 031	D4ZR04	248
15 60 014 350	ZZ1435T	192
15 60 020 550	ZZ2055T	192
15 60 030 700	ZZ3070T	193
15 60 040 900	ZZ409BD	193

Item Number	Order Code	page
15 90 900 001	ZM9000	205
15 90 900 001	ZM9000	217
15 90 900 002	ZM9001	205
15 90 900 002	ZM9001	217
16 03 026 000	N9221	76
16 03 027 000	N9321	76
16 03 028 000	N9331	76
16 03 029 000	N9341	77
16 03 030 000	N9361	77
16 04 821 110	B51214	74
16 04 822 110	B50224	75
16 04 844 100	B50449	75
16 04 844 110	B50444	75
16 04 845 110	B53450	74
16 04 845 111	B53455	74
16 04 845 112	B53457	74
16 04 845 210	B50457	75
16 04 846 114	B50460D	75
16 04 849 120	B56499	73
16 04 882 110	B50829	76
16 06 022 000	V94420	112
16 06 025 000	N1014	82
16 08 000 001	N1015	83
16 11 630 500	B6305B	77
16 11 631 000	B6310G	78
16 11 631 001	B6310BL	78
16 11 631 002	B6310BE	78
16 11 632 000	B6320GY	78
16 13 052 600	B0526B	80
16 13 052 700	B0527B	80
16 13 053 100	B0531B	79
16 13 053 200	B0532B	79
16 13 054 300	B0543B	79
16 13 054 500	B0545B	79
17 02 010 034	J58133	348
17 02 010 035	J5810	348
17 03 060 021	N3110	82
17 03 100 021	N3111	82
17 03 150 021	N3112	82
17 03 225 021	N3113	81
17 04 012 000	V0120	81
17 04 012 200	V0122	81
17 04 012 300	V0123	80
17 04 012 500	V0125	80
17 04 021 900	V0219	81
18 04 000 100	K1731	312
18 04 000 300	K1821	312
18 04 000 500	K1851	312
18 04 000 600	K1731.2	314
18 04 000 601	K1821.2	314
18 04 000 602	K1851.2	314
18 04 100 100	K1331	312
18 04 100 300	K1421	312
18 04 100 500	K1451	312
18 04 100 701	K1331.2	314
18 04 100 702	K1421.2	314
18 04 100 703	K1451.2	314
18 04 300 100	R5060	312
18 04 300 200	R5060.2	314
18 07 100 300	K7311	312
18 07 100 400	K7321	313
18 07 100 500	K7331	313
18 07 100 700	K7351	313
18 07 100 800	K7321.2	314
18 07 100 801	K7331.2	314
18 07 100 802	K7351.2	315
18 07 100 803	R5850.2	315
18 07 100 804	R5852.2	315
18 07 200 100	R5639	313
18 07 200 300	R5553	313
18 07 200 500	R5850	313
18 07 200 600	R5851	313
18 07 200 700	R5852	313
18 07 201 000	R5639.2	315
18 07 300 100	R5602	313
18 07 300 200	R5610	313
18 07 300 300	R5602.2	315
18 07 300 301	R5610.2	315
18 11 000 200	K9304	314
18 21 000 100	K0101	310
18 21 000 400	K0141	310
18 21 000 500	K0102	311
18 21 000 600	K0151	310
18 21 000 700	K0103	309
18 21 000 800	K0301	311
18 21 100 100	K0201	310

Item Number	Order Code	page
18 21 100 200	K0202	310
18 21 100 300	K0311	311
18 21 100 301	K0312	311
19 01 012 016	P01320R	270
19 02 010 300	P01303	270
19 02 020 150	P0221U	276
19 02 330 154	P1321PD	276
19 04 030 000	P0003C	290
19 04 040 000	P0004C	290
19 05 010 003	P0072	291
19 05 111 001	P0068	294
19 05 120 010	P0063	292
19 05 120 030	P0069	295
19 06 010 501	A6000.1	381
19 06 010 504	A6002.0	381
19 06 010 507	A6000.3	382
19 06 010 510	A6002.2	382
19 06 010 512	A6000.5	381
19 06 100 050	P0039	291
19 06 100 060	P0050	291
19 06 100 090	P0066	291
19 06 110 200	P0034	291
19 06 110 300	P0038	291
19 06 200 100	A6100.0	380
19 06 200 101	A6100.1	380
19 06 200 102	A6100.2	380
19 06 200 103	A6100.3	381
19 06 200 104	A6100.4	380
19 06 200 105	A6100.5	382
19 06 200 106	A6100.6	382
19 06 200 107	A6100.7	382
19 06 200 108	A6100.8	382
19 06 200 109	A6100.9	382
19 06 300 100	A6004.2	381
19 06 300 101	A6004.1	381
19 06 300 102	A6004.0	381
19 06 300 103	A6003.0	381
19 06 300 104	A6004.3	381
19 06 300 105	A6004.4	381
19 06 300 106	A6004.7	383
19 06 300 107	A6004.6	382
19 06 300 108	A6004.5	382
19 06 300 109	A6003.1	382
19 06 300 110	A6004.8	383
19 06 300 111	A6004.9	383
19 09 040 202	P54212	282
19 09 040 203	P54222	282
19 09 480 301	P54252	282
19 10 000 800	P0055N	293
19 10 000 900	P0056N	293
19 14 071 100	PM0902	283
19 14 071 200	PM0904	283
19 14 071 250	PM0905	283
19 14 081 102	PM1102	283
19 14 081 103	PM1103	283
19 14 081 104	PM1104	283
19 14 081 105	PM1105	284
19 21 010 202	P0122	280
19 21 010 302	P0123R	280
19 21 010 503	P0125R	280
19 21 010 504	P01805	278
19 21 010 701	P0127R	280
19 21 011 002	P0120R	280
19 21 011 003	P01810R	278
19 21 011 502	P01215R	280
19 21 012 001	P01220R	280
19 21 012 500	P01225R	280
19 21 012 502	P01825R	278
19 21 013 001	P01230R	281
19 21 021 000	P0701	279
19 21 021 502	P0702	279
19 21 022 000	P0703	279
19 21 022 502	P0704	279
19 21 031 000	P01810	278
19 21 032 000	P01820	278
19 21 033 000	P01830	278
19 21 611 000	P01510W	279
19 21 612 000	P01520W	279
19 22 010 150	P0121	276
19 22 030 150	P0321	275
19 22 030 153	P0321R	272
19 22 030 200	P0322	275
19 22 030 308	P0323R	272
19 22 030 508	P0325R	272
19 22 040 150	P0421	275
19 22 040 152	P0421R	272

Item Number	Order Code	page
19 22 040 191	P04219GU	276
19 22 040 302	P0423R	272
19 22 040 400	P0422	276
19 22 040 502	P0425R	272
19 22 050 150	P0521	275
19 22 050 153	P0521R	272
19 22 050 201	P0522	276
19 22 050 308	P0523R	272
19 22 050 508	P0525R	273
19 22 060 151	P0621	277
19 22 060 200	P0622	275
19 22 060 302	P0623R	273
19 22 060 502	P0625R	273
19 22 120 200	P0222CQ	277
19 22 130 150	P1321	275
19 22 130 156	P1321R	273
19 22 130 200	P1322	275
19 22 130 308	P1323R	273
19 22 130 508	P1325R	273
19 22 140 152	P1421R	273
19 22 140 153	P1421	277
19 22 140 200	P1422	275
19 22 140 302	P14231	271
19 22 140 303	P1423R	273
19 22 140 503	P1425R	273
19 22 150 154	P1521R	273
19 22 150 155	P1521	277
19 22 150 200	P1522	276
19 22 150 304	P1523RU	274
19 22 150 305	P1523PD	277
19 22 150 306	P1523CU	277
19 22 150 308	P1523R	274
19 22 150 508	P1525R	274
19 22 160 152	P1621R	274
19 22 160 153	P1621	277
19 22 160 200	P1622	276
19 22 160 302	P1623R	274
19 22 160 502	P1625R	274
19 22 330 150	PC1321	276
19 22 330 152	PC1321R	274
19 22 340 151	PC1421R	274
19 22 340 301	PC1423R	274
19 22 340 501	P14251	271
19 22 340 502	PC1425R	274
19 22 341 000	P14201	271
19 22 350 151	PC1521R	275
19 22 360 150	PC1621R	275
19 22 570 150	PS1721	276
19 23 030 000	P0320	281
19 23 050 000	P0520	281
19 23 130 000	P1320	281
19 23 150 000	P1520	281
19 25 030 020	P00242	292
19 25 030 030	P00252	292
19 25 030 040	P00262	292
19 25 030 050	P00272	292
19 25 030 060	P00282	292
19 25 030 090	P00292	292
19 26 010 100	P0047	291
19 26 010 200	P0049	291
19 27 010 010	P5522	294
19 27 010 023	P5523N	294
19 27 110 012	P5521N	293
19 27 110 020	P5525	294
19 27 110 033	P5526N	294
19 28 042 500	P09225	289
19 28 042 501	P09225M	288
19 28 042 504	P092251	288
19 28 042 507	P19427	288
19 28 044 000	P09240	289
19 28 044 001	P09240M	289
19 28 045 000	P09250	289
19 28 045 003	P092501	288
19 28 141 000	P19510	290
19 28 141 500	P19515	290
19 28 142 000	P09220	289
19 28 242 500	P08225	287
19 28 242 502	P19222	286
19 28 245 000	P08250	287
19 28 245 003	P19223	286
19 28 432 500	P192250	284
19 28 441 500	P08215	286
19 28 542 500	P19625	287
19 28 544 000	P19224	286
19 28 545 001	P19220	287
19 28 545 011	P19221	287
19 28 732 000	P08620W	285
19 28 733 300	P19733	284
19 28 742 500	P08625W	285
19 28 745 000	P08650W	285
19 31 000 020	P5822	295
19 36 055 310	P5531	25
19 36 055 310	P5531	295
19 36 055 320	P5532	25
19 36 055 320	P5532	296
19 36 553 300	P5533	25
19 36 553 300	P5533	296
19 36 553 400	P5534	26
19 36 553 400	P5534	296
19 50 011 201	A1399	383
19 50 011 202	A1398.2	384
19 50 011 203	A1398.3	384
19 50 011 204	A1398.4	384
19 50 011 207	A1396.2	384
20 01 151 010	F61511	391
20 01 151 020	F61512	392
20 01 151 030	F61513	392
20 01 151 040	F61514	392
20 01 151 050	F61515	392
20 01 151 060	F61516	392
20 01 151 070	F61517	393
20 01 151 090	F61519	393
20 01 151 092	F615992	393
20 01 191 020	F61912	391
20 01 192 010	F61921	393
20 01 192 020	F61922	393
20 01 192 030	F61923	394
20 01 192 040	F61924	394
20 01 192 050	F61925	394
20 01 192 060	F61926	394
20 01 192 070	F61927	394
20 01 192 090	F61929	395
20 01 192 099	F61999	395
20 01 251 020	F62512	391
20 02 151 520	F6515	395
20 02 191 020	F6910	395
20 02 502 002	F6030	396
20 03 191 020	F51912	396
20 03 250 320	F52503	396
20 03 250 520	F52502	396
20 04 752 500	F87525	396
20 05 000 010	F6070	397
20 06 000 000	F6060	397
20 06 000 010	F6080	397
21 01 103 000	P5681	374
21 01 104 000	P5682	374
21 01 106 000	P5604	373
21 01 106 001	P5603R	374
21 01 106 010	P5614	373
21 01 107 000	P5683	374
21 01 108 000	P5684	375
21 01 109 000	P5685	375
21 01 110 000	P5686	375
21 01 208 000	P56060T	373
21 01 209 000	P5607	373
21 01 210 000	P5601UF	374
21 01 306 000	P5623	372
21 01 307 000	P5616OT	373
21 01 308 000	P5611OTR	375
21 01 309 000	P5611OT	372
21 01 501 020	P56402	377
21 01 505 000	P56500	377
21 01 505 003	P56450	377
21 01 505 006	P56502	378
21 01 900 000	P56201	29
21 01 900 000	P56201	376
21 01 900 001	P56211	29
21 01 900 001	P56211	376
21 01 900 002	P56201UF	29
21 01 900 002	P56201UF	376
21 01 900 003	P5630S	30
21 01 900 003	P5630S	376
21 04 101 000	P56501	377
21 04 102 000	P56300	378
21 04 103 000	P56500S	17
21 04 103 000	P56500S	379
21 04 104 000	P56000S	17
21 04 104 000	P56000S	379
21 04 105 000	P56400S	18
21 04 105 000	P56400S	379
21 05 564 000	P5640S	31
21 05 564 000	P5640S	378
21 06 000 100	P5660FR	375
22 01 001 000	M0018	370
22 01 002 000	M0048	370
22 01 012 000	M0014A	369
22 01 013 000	M0071	369
22 01 014 000	M0012A	369
22 01 015 000	M0003B	370
22 02 003 000	M2092	367
22 02 007 000	M0391	367
22 02 008 000	M0420	366
22 02 013 000	M0400	368
22 02 014 000	M0320	367
22 02 015 000	M0305	368
22 02 016 000	M3691	366
22 02 017 000	M3620	367
22 02 019 000	M0430	366
22 02 020 000	M0230	367
22 02 021 000	M3216	368
22 03 003 000	N0322	370
22 05 000 010	M0007A	369
22 06 000 010	M0501	371
22 06 000 020	M0502	371
22 06 000 030	M0503	371
23 04 000 101	S4001N	368
23 04 000 300	S4003	368
23 05 021 000	S5271	322
23 05 021 100	S5273	322
23 05 023 000	S5272	323
23 05 032 010	S5378	325
23 05 050 200	S5131	322
23 05 050 201	S5231S	322
23 05 058 401	S5213	320
23 05 059 009	S5194	325
23 05 100 200	S5141	321
23 05 100 201	S5241S	322
23 05 113 000	S5261	320
23 05 113 002	S5262	321
23 05 113 003	S5268	321
23 05 113 500	S5265	321
23 05 113 502	S5266	321
23 05 113 600	S5269	325
23 05 120 005	S5385	323
23 05 120 010	S5373	324
23 05 120 020	S5374	324
23 05 120 030	S5375	325
23 05 120 040	S5376	325
23 05 130 000	S5381	323
23 05 130 010	S5381E	323
23 05 135 000	S5382	324
23 05 135 010	S5383	324
23 05 500 000	S5252	323
23 05 500 002	S5253	324
23 08 201 510	S8131	316
23 08 201 550	S8130	318
23 08 203 510	S8231	317
23 08 203 550	S8230	318
23 08 205 010	S8251	317
23 08 205 050	S8250	318
23 08 207 500	S8307	315
23 08 207 510	S8271	317
23 08 207 550	S8270	318
23 08 210 000	S8310	316
23 08 210 010	S8281	317
23 08 210 050	S8280	318
23 08 215 000	S8314	316
23 08 215 010	S8291	317
23 08 215 050	S8290	319
23 08 225 000	S8324	316
23 08 305 050	S8253	319
23 08 307 550	S8273	319
23 08 310 050	S8283	319
23 08 315 050	S8293	319
23 08 325 000	S8405	316
23 09 010 010	S9121	305
23 09 010 020	S9122	306
23 09 010 030	S9123	307
23 09 010 040	S9124	307
23 09 010 050	S9125	307
23 09 010 060	S9126	307
23 09 010 070	S9127	307
23 09 010 080	S9128	306
23 09 010 090	S9129	306
23 09 010 100	S9130	308
23 09 010 120	S9134	305
23 09 020 010	S9131	308
23 09 020 020	S9132	308
23 09 110 010	S9221	306
23 09 110 020	S9222	306
23 09 120 010	S9230	308
23 09 130 010	S9310	309
23 09 130 020	S9320	309
23 15 094 010	S9401	336
23 15 094 020	S9402	336
23 15 094 030	S9403	336
23 15 094 040	S9404	336
23 33 001 010	SL0101	327
23 33 003 010	SL0301	327
23 33 020 010	SL2001	327
23 33 101 011	S10100	328
23 33 101 013	S10102	328
23 33 101 014	S10103	328
23 33 101 015	S10110	328
23 33 101 016	S10101	328
23 33 101 031	S10300	328
23 33 101 032	S10310	328
23 33 101 051	S10500	328
23 33 101 052	S10510	329
23 33 101 070	S10000	329
23 33 101 100	S11000	329
23 33 130 051	S30500	329
23 33 130 052	S30510	329
23 33 130 101	S31000	329
23 33 130 102	S31010	329
23 33 130 120	S30100	329
23 33 130 121	S30110	329
23 33 130 150	SB3015	326
23 33 130 151	S31500	329
23 33 130 152	S31510	330
23 33 130 250	S30200	330
23 33 130 251	S30210	330
23 33 130 350	S30300	330
23 33 130 351	S30310	330
23 33 130 750	S30700	330
23 33 130 751	S30710	330
23 33 131 030	SB3103	326
23 33 131 100	SB3110	326
23 33 131 150	SB3115	326
23 33 170 010	S70203	330
23 33 170 021	S70200	330
23 33 170 022	S70201	330
23 33 170 023	S70202	331
23 34 130 100	SD3010	327
23 35 050 010	SM5001	333
23 35 050 020	SM5102	333
23 35 050 030	SM5003	334
23 35 050 050	SM5105	334
23 35 070 410	SM7004W	331
23 35 070 420	SM7004B	331
23 35 071 310	SM7013W	333
23 35 072 100	SM7021BL	332
23 35 072 200	SM7022BL	332
23 35 072 310	SM7023	333
23 35 072 500	SM7025W	331
23 35 072 501	SM7025BL	332
23 35 076 011	SM7026	332
23 35 076 012	SM7054	334
23 35 076 013	SM7027W	332
23 35 076 014	SM7015W	333
23 35 076 020	SM7009BL	334
23 35 076 021	SM7008BL	334
24 00 517 252	S1111	302
24 01 520 132	S12252	301
24 01 720 132	S15272	301
24 01 720 232	S19272	301
24 01 730 132	S15273	301
24 01 730 232	S19273	301
24 01 750 132	S15275	301
24 01 750 232	S19275	302
24 02 720 132	S08272	302
24 02 720 232	S09272	302
24 02 730 132	S08273	302
24 02 730 232	S09273	302
24 13 120 132	S14312	303
24 13 120 232	S18312	303
24 13 130 132	S14313	303
24 13 130 232	S18313	304
24 13 150 132	S14315	303
24 13 150 232	S18315	304
24 13 220 132	S14322	303
24 13 220 232	S18322	304
24 13 230 132	S14323	303
24 13 230 232	S18323	304
24 13 250 132	S14325	303
24 13 250 232	S18325	304
24 13 720 132	S14372	302
24 13 720 232	S18372	303
24 13 730 132	S14373	302
24 13 730 232	S18373	303
24 13 750 132	S14375	303
24 17 715 202	S11370	304
24 21 130 212	S03030	298
24 21 130 213	S03030N	298
24 21 130 214	S03031N	298
24 21 150 212	S03050	298
24 21 150 213	S03050N	299
24 21 230 230	S03330	298
24 21 250 230	S03350	298
24 25 130 210	S03130N	300
24 25 130 220	S03130	299
24 25 150 210	S03150N	300
24 25 150 220	S03150	299
24 25 210 210	S03210N	300
24 25 230 210	S03230N	300
24 25 230 220	S03230	299
24 25 250 210	S03250N	300
24 25 250 220	S03250	299
24 25 430 230	S03430	299
24 25 450 230	S03450	299
24 35 724 032	S00003	300
25 01 000 100	J0200	343
25 01 000 200	J0203	344
25 01 000 300	J0240	343
25 01 000 330	J0240E	343
25 01 000 400	J0260	343
25 01 100 100	J0220J	344
25 01 100 300	J0222	344
25 03 000 100	J0197	345
25 03 000 400	J0198	345
25 04 200 100	J0199	345
25 04 500 110	J0102	346
25 04 600 110	J0103	346
25 04 700 110	J0104	346
25 06 000 800	J0400	347
25 07 100 600	J5802	346
25 07 100 700	J5803	347
25 08 000 810	J5709	347
25 08 000 900	J5710	347
25 08 100 100	J5711	347
25 08 100 200	J5712	348
25 12 000 100	J0401	311
25 20 236 400	J6014	342
25 20 900 088	J50988	342
25 20 900 089	J50989	342
25 21 000 030	J60030	349
25 21 000 110	J60110	349
25 21 000 120	J60120	349
25 21 000 130	J60130	349
25 21 000 140	J60140	349
25 21 000 170	J60170	349
26 03 013 000	E0041	256
26 03 014 000	E8471	256
26 03 015 000	E2157	262
26 03 016 001	E0121	257
26 03 016 002	E0422	257
26 03 115 000	E0107	255
26 03 117 000	E0114	256
26 03 118 000	E0042	256
26 03 119 002	E0129	255
26 03 119 003	E8636	257
26 03 121 000	E0127	256
26 03 122 000	EGS0102	30
26 03 122 000	EGS0102	258
26 03 123 000	EGS0101	30
26 03 123 000	EGS0101	258
26 03 203 000	E0345	257
26 05 004 000	E0202	262
26 06 003 000	E0117N	254
26 06 139 000	E3070	253
26 06 150 000	E8466	252
26 06 153 000	E3003	253
26 06 162 000	E6018	253
26 06 164 000	E6016	252
26 06 166 000	E0352	254
26 06 169 000	E5080	253
26 06 170 000	E5111	253
26 06 172 000	E8647	254
26 06 174 000	E8670	254
26 06 176 000	E0387	254
26 06 179 000	E8010	255
26 17 000 500	EV026	261
26 17 001 200	EV012	261
26 17 001 400	EV014	260
26 17 001 401	EV014B	260
26 17 001 600	EV016	260
26 17 002 000	EV020	261
26 17 002 200	EV022	261
26 17 002 300	EV023	261
26 17 002 500	EV025	260
26 17 002 600	EV029	262
26 17 002 800	EV028	262
26 17 010 400	EV104	263
26 17 010 500	EV105	263
26 17 010 600	EV106	263
26 17 010 902	EV112	32
26 17 010 902	EV112	264
26 18 002 600	E0086	265
26 27 303 000	E30300	31
26 27 303 000	E30300	264
26 93 000 120	E05018	258
26 93 000 160	E08400	259
26 93 000 180	E03070	259
26 93 000 220	E06018	259
26 93 000 230	E06016	259
26 93 000 240	E00387	259
27 02 029 000	J0685	339
27 02 031 000	J0701	337
27 02 033 000	J0703	337
27 02 034 000	J0704	338
27 02 035 000	J0705	338
27 02 038 000	J0708	338
27 02 039 000	J0709	338
27 03 105 000	J0665	341
27 03 106 000	J0666	341
27 04 030 000	J0680	341
27 04 039 000	J0690	341
27 04 280 010	J0669	341
27 04 310 000	J0801	339
27 04 320 000	J0802	339
27 04 330 000	J0803	339
27 04 340 000	J0804	340
27 04 350 000	J0806	340
27 04 560 000	J0906	340
27 04 570 000	J0907	340
28 04 000 013	C0024	355
28 04 000 014	C0025	355
28 04 000 030	C0030	355
30 10 000 291	H1085	353
30 10 000 292	H1086	353
30 10 001 151	H1141	353
30 10 002 017	H2017	353
30 10 002 050	H2050	352
30 10 003 010	H3010	351
30 10 003 015	H3015	351
30 10 003 016	H3016	352
30 10 003 017	H3017	352
30 10 003 018	H3018	352
30 10 003 019	H3019	352
30 10 040 200	H4020	15
30 10 040 200	H4020	354
30 10 040 210	H4021	16
30 10 040 210	H4021	354
30 10 040 300	H4030	16
30 10 040 300	H4030	354
30 10 040 310	H4031	16
30 10 040 310	H4031	354
30 10 040 320	H4032	16
30 10 040 320	H4032	355
30 24 040 510	H4051	13
30 24 040 510	H4051	356
30 24 040 520	H4052	13
30 24 040 520	H4052	356
30 24 040 560	H4056	14
30 24 040 560	H4056	356
30 24 040 570	H4057	14
30 24 040 570	H4057	357
30 24 040 580	H4058	14
30 24 040 580	H4058	357
30 24 040 610	H4061	14
30 24 040 610	H4061	357
30 24 040 630	H4063	15
30 24 040 630	H4063	357
30 24 040 640	H4064	15
30 24 040 640	H4064	357
30 24 040 650	H4065	15

Item Number	Order Code	page
30 24 040 650	H4065	358
30 69 050 010	H5001	24
30 69 050 010	H5001	350
30 69 050 110	H5011	23
30 69 050 110	H5011	384
30 69 050 120	H5012	23
30 69 050 120	H5012	385
30 69 050 130	H5013	23
30 69 050 130	H5013	385
30 69 050 140	H5014	24
30 69 050 140	H5014	385
30 69 050 150	H5015	24
30 69 050 150	H5015	385
30 69 050 160	H5016	24
30 69 050 160	H5016	385
30 69 050 230	H5023	17
30 69 050 230	H5023	355
30 69 051 010	H5101	26
30 69 051 010	H5101	386
30 69 051 020	H5102	26
30 69 051 020	H5102	386
30 69 051 030	H5103	26
30 69 051 030	H5103	386
30 69 051 040	H5104	27
30 69 051 040	H5104	386
30 69 051 050	H5105	27
30 69 051 050	H5105	387
30 69 051 060	H5106	27
30 69 051 060	H5106	387
30 69 051 070	H5107	27
30 69 051 070	H5107	387
30 69 051 080	H5108	27
30 69 051 080	H5108	387
30 69 051 090	H5109	28
30 69 051 090	H5109	387
30 69 051 100	H5110	28
30 69 051 100	H5110	388
30 69 051 110	H5111	28
30 69 051 110	H5111	388
30 69 052 010	H5020	18
30 69 052 010	H5020	365
30 69 052 020	H5021	18
30 69 052 020	H5021	365
30 69 052 030	H5022	25
30 69 052 030	H5022	350
30 70 000 009	H7009	355
30 80 000 013	H8013	355
31 04 139 600	A1396	384
31 04 139 611	A1396.1	384
31 04 139 800	A1398	383
31 04 139 811	A1398.1	383
31 05 213 050	A6110	297
31 05 213 051	A6111	297
31 05 213 054	A6114	297
31 05 213 055	A6115	297
31 06 213 150	A6310	297
31 06 213 151	A6311	297
31 06 213 152	A6312	297
31 06 213 153	A6313	297
31 06 213 240	A6210	296
31 06 213 241	A6211	297
31 06 213 242	A6212	296
31 06 213 243	A6213	297
31 16 300 400	A3004	335
31 16 301 000	A3010	335
31 16 336 600	A3366	335
31 16 336 900	A3369	335
31 32 510 900	C5109	150
31 46 000 250	A4001	388
31 46 000 400	A4002	388
31 46 000 600	A4003	389
31 46 001 600	A4004	389
31 46 010 400	A4005	389
31 46 010 600	A4006	389
31 46 011 000	A4007	389
31 47 010 020	A5102	390
31 47 020 010	A5201	390
31 47 030 010	A5301	390
31 47 040 010	A5401	390
31 99 900 000	A9000	389
32 32 224 400	KT2244	266
32 32 226 500	KT2265	265
32 32 322 300	KT3223	266
32 32 336 400	KT3364	266
32 32 356 400	KT3564	266
32 33 012 100	KE1210	268

Item Number	Order Code	page
32 33 012 400	KE1240	267
32 33 012 800	KE1280	267
32 33 019 160	KE1916	268
32 33 029 810	KE2981	267
32 33 049 100	KE4910	268
32 33 049 110	KE4911	268
32 33 049 120	KE4912	268
32 33 049 130	KE4913	269
32 33 049 140	KE4914	269
32 33 068 200	KE6820	267
32 33 079 551	KE7955N	269
34 01 000 010	P57001	364
34 01 000 020	P57002	364
34 02 005 000	P5705	360
34 02 012 000	P5712	360
34 02 025 000	P5727	359
34 02 043 000	P5728	360
34 02 044 000	P5729	361
34 02 060 000	P5760	359
34 02 060 001	P5763	359
34 02 060 002	P5760T	363
34 02 063 000	P5763R	359
34 02 107 000	P5723	360
34 02 108 000	P5723T	363
34 02 112 000	P5727T	363
34 02 113 000	P5728T	363
34 02 114 000	P5729T	363
34 02 115 000	P5730	360
34 02 116 000	P5731	361
34 02 117 001	P5732T	364
34 02 118 000	P5750	358
34 02 118 001	P5750T	362
34 02 119 000	P5750.2T	358
34 02 120 000	P5750.2R	359
34 02 121 000	P5729B	361
34 02 122 000	P5733W	361
34 02 123 000	P5733S	361
34 02 124 000	P5733G	362
34 02 125 000	P5734	362
34 02 126 000	P5734B	362
34 02 126 001	P5734T	364

Button and special batteries

EZÜST-OXID					Diameter [mm]	Thickness [mm]	ALKÁLI				
GP order code	Type	Reference	SR**	SR***			GP order code	AG**	101 - 199	LR**	LR***
–	317	SR516SW, SR62, SR516, SB-AR, 280-58, V317, D317, GP317, 616, 317, SR516W, 317X, 317A	SR62	SR516	5,8	1,6	–	–	–	–	–
–	321	SR616SW, SR65, SR616, SB-AF/DF, 280-73, DA, V321 , D321, GP321, 611, 321, SR618, 321A, 321X, SB-AF, E321	SR65	SR616	6,8	1,6	–	–	–	–	–
B3357F1	357	SR44W, SR44, SR1154, SB-B9, 280-62, V357, D357, 228, S1145E, GP357, AG13, 357, 303, CA18, SG13, EPX76, 10L14, A357, 357X, 357A, D357H, MS76, V76XP, S76E, 357/303, MS76, AG357, SR1154PW, EXP76, E357, E357/303EN,1128MP, 1166A, AG13, D76A, G13A, GPA7, GPA76, LR44, LR1154, L1154, PX675A, PX76A, RPX675, S76, V13GA, RW82, KA, A76, 208-904, SB-F9, G13-A, CA18, CA19, LR44, GP76A, L1154H, A-76, AG14, AG-14, KA76, MS76H, CR44, LR44H, L1154G, LR44G, GPS76A, L1154C, L1154F, GPA75, GDA76, A613, LR44GD	SR44	SR1154	11,6	5,4	**B13762 B1376 B7970 (RAVER)**	AG13	A76	LR44	LR1154
–	362	SR721SW, SR58, SR721, SB-AK/DK, 280-29, S, V362, D362, 601, S721E, GP362, AG11, AG-11, 362, SG11, 362A, SR720, 362X, 362/361, RW310, L721, LR721, SB-AK, E362	SR58	SR721	7,9	2,1	–	AG11	162	LR58	LR721
B3364F1	364	SR621SW, SR60, SR621, SB-AG/DG, 280-34, T, V364, D364, 602, S621E, GP364, AG1, AG-1, 364, L621, LR621, SG1, LR60, LR620, SW621, GP164, 364X, 364A, AG1/364A, SB-AG, E364	SR60	SR621	6,8	2,1	–	AG1	164	LR60	LR621
–	371	SR920SW, SR69, SR921, SB-AN, 280-31, V371, D371, 605, S921E, GP371, AG6, AG-6, 371, CX921, SR290SW, 371, SR69, SG6, LR921, LR920SW, L921, 371A, 371X, 370	SR69	SR921	9,5	2,1	–	AG6	171	LR69	LR921
B3377F1	377	SR626SW, SR66, SR626, SB-AW, 280-39, BA, V377, D377, 606, S626E, GP377, AG4, AG-4, 377, L626, SG4, LR626, LR66, SR628SW, E377, E377CA, LR626SW, 377A, SR262SW, 377X, 377S, GP177, SR6265W, 377/376, E377A, SR66SW, SR625SW, 377BA, CR626SW, AG4/377, AG04	SR66	SR626	6,8	2,6	–	AG4	177	LR66	LR626
–	379	SR521SW, SR63, SR521, SB-AC/DC, 280-59, JA, V379, D379, 618, GP379, S521E, 379, LR521, AG0, 379A, 379X, AG0, AG-0, 521A, UC379, SR418SW, SB-AC, 379LD, E379	SR63	SR521	5,8	2,1	–	AG0	179	LR63	LR521
–	386	SR43W, SR43, SR1142, SB-B8, 280-41, H, V386, D386, 260, S1142E, GP386, AG12, AG-12, 386, 301, SG12, LR42, 386A, 386X, CR43, LR1144, RW44, SR1142PW, 386B, BSR43H, SR43H, E386, 186, 1176A, 186-1, G12A, GP86A, L1142, LR1142, LR43, RW84, V12GA, GP186, L1142F, 10L124, G12-A	SR43	SR1142	11,6	4,2	**B13861 B1386**	AG12	186	LR43	LR1142
B3389F1	389	SR1130W, SR54, SR1130, SB-BU, 280-15, M, V389, D389, 626, S1131E, GP389, AG10, AG-10, 389, 390, 189, L1131, G10, V10GA, LR1130, GP189, LR54, SG10, A389, L1131, L1131C, L1131D RW89. LR1130S, LR1131, L1131/D, LR1130H, 389A, 389E, 389X, L1133, SR1131, LL1131, LL1131F, L1131F, L1131H, LR1130X, L-1131, SR1130PW, L1130, LH1130, E389	SR54	SR1130	11,6	3,1	**B13892 B1389**	AG10	189	LR54	LR1130
B3392F1	392	SR41W, SR736, SB-B1, 280-13, K, V392, D392, 247D, S736E, AG3, AG-3, GP392, LR736, 392, 192, L736, G3, V3GA, LR41, SG3, ASG3, G3A, V36A, 92A, GP192, 392X, 384, SR41, TR41SW, SR41SW, 247B, SP392, S736S, 392A, 392X, L736H, L736S, SR736PW, RW47, RW47S, GP392-A1, SR41, E392, LR41H, AG03	SR41	SR736	7,9	3,6	**B13921 B13925**	AG3	192	LR41	LR736
–	394	SR936SW, SR936, SB-A4, 280-17, V394, D394, 625, 394, GP394, AG9, AG-9, 394, SG9, L936, LR936, SR45, RW33, 394A, 394X, SR9365W, E394		SR936	9,5	3,6	–	AG9	194	LR45	LR936
–	395	SR926SW, SR57, SR927, SB-AP/DP, 280-48, LA, V395, D395, 610, 395, GP395, S926E, 395, SG7, L926, SW927, 927, 395A, 395X, SB-AP, E395, 399	SR57	SR927	9,5	2,6	–	AG7	195	LR57	–
–	396	SR726W, SR59, SR726, SB-BL. 280-52, V, V396, D396, 612, GP396, S726E, 396/397, SG2, 396A, 396X, SR726PW, E396	SR59	SR726	7,9	2,6	–	AG2	106	LR59	–
–	–	V23GA, MN21, A23	–	–	10,22	28,5	**B1300 B13001**	–	–	–	–
–	–	A27, MN24, A90	–	–	8	28,5	**B1301 B13011**	–	–	–	–
–	–	MN11	–	–	10,22	16,5	**B1302 B13021**	–	–	–	–
–	–	29A, A29, 32A, A32, L822	–	–	8,0	21,9	**B13951**	–	–	–	–
–	–	4001, AM5, E90, KN, LADY, LR1, MN9100, MN9100/N, N, UM-5, UM5, LR01, KN-2, 810, 910A, LR1-N, LR1/E90	–	–	12	30,2	**B1305**	–	–	LR1	–
–	–	LR9, CA16, V625U, EPX625G, PX625A, GP625A, A625, L1560, 625A, MR9P, KA625, R625, E625G, V625U, MR09, EPX625, RPX625, KX615, HD1560, 1124MP, E625N, HG-625R, V13PX, EPX13, V625PX, HD625, PN625, RM625, 4625, H1560, M01, M20, 8930	–	–	15,6	5,95	**B1325**	–	–	LR9	–
–	–	GP25A, AAAA, MN2500, LR8, D425, E96	–	–	8,3	42,5	**B1306**	–	–	LR8	–
–	–	PX28A, A544, 28PXA, 4LR44, 476A, 4G13, GP476, K28, V28, PX28AB, L1325, 1414A, V4034PX, PX28L, K28L, L544, L544BP, V28PXL, 2CR1/3N, 2CR1-3N, CR28L, 1406LC, 2CR11108	–	–	13	25,2	**B1303**	–	–	4LR44	–

Lead-acid accumulators



		B9641	B9651	B9659	B9682	B9652	B9672	B9653	B9679	B9691
Lead-acid accumulators – 5-year optimal service life	Parameters	6 V/4 Ah	6 V/1.3 Ah	6 V/7 Ah	6 V/12 Ah	12 V/1.3 Ah	12 V/2.2 Ah	12 V/4.5 Ah	12 V/5 Ah	12 V/7.0 Ah
	Terminal	4.7 mm	4.7 mm	4.7 mm	4.7 mm	4.7 mm	4.7 mm	4.7 mm	6.3 mm	4.7 mm
Use	Rechargeable flashlights	yes	yes	–	–	–	–	–	–	–
	Electronic security systems	–	yes	yes	yes	yes	yes	yes	yes	yes
	Electronic fire alarm systems	–	yes	yes	yes	yes	–	yes	yes	yes
	UPS	–	–	yes	yes	–	–	yes	yes	yes
	Children's toys	yes	–	yes	yes	–	–	–	–	yes
	Emergency lighting	yes	–	–	–	–	–	–	–	yes
	Garden equipment	–	–	–	–	–	–	–	yes	–
	Elevators – power for emergency calls and lighting	–	–	–	–	yes		yes	yes	yes
	Echo sounders, sonars, power for el. boat motors	–	–	–	–	–	–	–	yes	yes
	Traction – electric bikes, scooters	–	–	–	–	–	–	–	–	–
Jablotron control panels	JA82Y	–	–	–	–	–	yes	–	–	–
	JA100K(R)	–	–	–	–	–	yes	–	–	–
	JA83	–	–	–	–	–	–	–	–	yes
	JA106K	–	–	–	–	–	–	–	–	yes
PARADOX	90 % use	–	–	–	–	–	–	–	–	yes
	10 % use	–	–	–	–	–	–	–	–	–



		B9654	B9674	B9675	B9656V	B9656	B9655	B9683	B9684	B9685
Lead-acid accumulators – 5-year optimal service life	Parameters	12 V/7.2 Ah	12 V/7.2 Ah	12 V/9 Ah	12 V/15 Ah	12 V/12 Ah	12 V/18 Ah	12 V/26 Ah	12 V/40 Ah	12 V/65 Ah
	Terminal	4.7 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm	12 × 12 × 2 mm	14 × 12 × 2 mm	M6	M8
Use	Rechargeable flashlights	–	–	–	–	–	–	–	–	–
	Electronic security systems	yes	yes	–	–	yes	yes	–	–	–
	Electronic fire alarm systems	yes	–	–	–	yes	yes	–	–	–
	UPS	yes	yes	yes	–	yes	yes	yes	yes	yes
	Children's toys	yes	yes	yes	yes	–	–	–	–	–
	Emergency lighting	yes	–	–	–	–	yes	yes	yes	yes
	Garden equipment	–	yes	yes	–	–	yes	–	–	–
	Elevators – power for emergency calls and lighting	yes	–	–	–	yes	yes	–	–	–
	Echo sounders, sonars, power for el. boat motors	yes	yes	yes	yes	yes	yes	yes	yes	yes
	Traction – electric bikes, scooters	–	–	–	yes	–	–	–	–	–
Jablotron control panels	JA82Y	–	–	–	–	–	–	–	–	–
	JA100K(R)	yes	–	–	–	–	–	–	–	–
	JA83	yes	–	–	–	–	yes	–	–	–
	JA106K	yes	–	–	–	–	yes	–	–	–
PARADOX	90 % use	yes	–	–	–	–	–	–	–	–
	10 % use	–	–	–	–	–	yes	–	–	–

Battery chargers








Order code	B56499	B54467D	B53457	B53455	B53450	B52427U
Model number	S491	P461	M451	M451	M451	B421
Series	Charge 10	Pro	Speed	Speed	Speed	Everyday
Charger connection	separated AC cord	USB	USB	USB	USB	USB
Power supply	100–240 V AC	5 V/2 A	5 V/1 A	5 V/1 A	5 V/1 A	5 V/1 A
Size of the charged cells	AAA, AA	AAA, AA	AAA, AA	AAA, AA	AAA, AA	AAA, AA
Special features	Eco mode	capacity check, docking station	–	–	–	–
Number of cells inside the package	4	4	4	4	–	4
Type of cells inside the package	AA Recyko Charge 10	AA ReCyko 2 700	AA ReCyko 2 700	AA ReCyko Pro	–	AA ReCyko 2 700
Charging time of the enclosed celles	0:10	1:30 – 3:30	2:45 – 5:30	2:00 – 4:00	–	7:30
Number of charging channels	4	4	4	4	4	2
Number of batteries charged	1 to 4	1 to 4	1 to 4	1 to 4	1 to 4	2 and 4
Charging current for AA	10 000 mA	1 800–900 mA	1 100–550 mA	1 100–550 mA	1 100–550 mA	400 mA
Charging current for AAA	1 500 mA	760–380 mA	730–370 mA	730–370 mA	730–370 mA	320 mA
Charging current for C	–	–	–	–	–	–
Charging current for D	–	–	–	–	–	–
Charging current for 9 V	–	–	–	–	–	–
Charging time AA 2 700 mAh	0:30	1:30 – 3:30	2:45 – 5:30	2:45 – 5:30	2:45 – 5:30	7:30
Charging time AAA 1 000 mAh	0:45	1:30 – 3:15	1:30 – 3:30	1:30 – 3:30	1:30 – 3:30	3:30







Order code	B55630	B51819	B51414	B51214	B51211
Model number	B631	BE811	E411	E211	E211
Series	Everyday	Economy	Economy	Economy	Economy
Charger connection	USB	USB	USB	USB	USB
Power supply	5 V/2 A	5 V/1 A	5 V/1 A	5 V/1 A	5 V/1 A
Size of the charged cells	AAA, AA, C, D, 9 V	AAA, AA	AAA, AA	AAA, AA	AAA, AA
Special features	–	–	–	–	–
Number of cells inside the package	–	8	4	2	2
Type of cells inside the package	–	AA ReCyko 2 100, AAA ReCyko 850	AA ReCyko 2 100	AA ReCyko 2 100	AAA ReCyko 800
Charging time of the enclosed celles	–	4:00 – 8:00	8:00	8:00	3:00
Number of charging channels	4	4	2	1	1
Number of batteries charged	2 and 4	2, 4, 6 and 8	2 and 4	2	2
Charging current for AA	370 mA	250 mA	300 mA	300 mA	300 mA
Charging current for AAA	290 mA	250 mA	300 mA	300 mA	300 mA
Charging current for C	550 mA	–	–	–	–
Charging current for D	550 mA	–	–	–	–
Charging current for 9 V	40–20 mA	–	–	–	–
Charging time AA 2 700 mAh	8:00	12:00	10:00	10:00	10:00
Charging time AAA 1 000 mAh	4:00	5:00	4:00	4:00	4:00

EMOS

Battery chargers







Order code	N9221	N9341	N9331	N9321	N9361
Type	BCL-20D	BCN-42D	BCN-41D	BCN-40	BCN-60U
Type of rechargeable cells	Li-ion, LiFePo4, NiMH	NiMH	NiMH	NiMH	NiMH
Power supply	5 V/2 A	5 V/1 A	5 V/1 A	5 V/1 A	5 V/2 A
Size of the charged cells	10440 – 26650, AAA, AA, C, SC	AAA, AA	AAA, AA	AAA, AA	AAA, AA, C, D, 9 V
Special features	capacity measurement, recovery modes, lithium battery charging	capacity measurement, recovery modes	–	–	–
LCD display	yes	yes	yes	–	–
Type of cells inside the package	–	4× AA NIMH 2 700	4× AA NIMH 2 700	–	–
Charging time of the individual celles	–	3:00	4:00	–	–
Number of charging channels	2	4	4	4	7
Number of batteries charged	1 and 2	1 to 4	1 to 4	1 to 4	1 to 6
Charging current for AA	1 000 mA	1 000–250 mA	1 000–500 mA	300 mA	500 mA
Charging current for AAA	1 000 mA	1 000–250 mA	1 000–500 mA	300 mA	500 mA
Charging current for C	1 000 mA	–	–	–	500 mA
Charging current for D	–	–	–	–	500 mA
Charging current for 9 V	–	–	–	–	30 mA
Charging time AA 2 700 mAh	3:00	3:00 – 12:00	3:00 – 4:00	10:00	6:30
Charging time AAA 1 000 mAh	1:15	1:15 – 5:00	1:15 – 2:00	4:00	2:30

Headlamps








Order code	P8569	P8555	P8567	P8566	P8572	P8571
Type	PHR19	CHR35	PHR17	PHR16	CHR41	CH46
Usage	OUTDOOR	OUTDOOR	SPORT	SPORT	OUTDOOR/SPORT	OUTDOOR/SPORT
Source of light	2× Osram SMD LED	CREE SMD LED	3× CREE SMD LED	2× CREE SMD LED	CREE SMD LED	CREE SMD LED
Max. light output	1 200 lm	600 lm	500 lm	300 lm	300 lm	300 lm
Max. beam distance	110 m	130 m	85 m	50 m	157 m	157 m
Number of lighting modes	11	5	10	9	4	4
Lighting modes	Turbo; Spot: 5 %; 20 %; 60 %;100 %, Flood:2,5 %; 10 %;60 %; 100 %; SOS, Red LED light	Turbo, 100 %, 20 %, 5 %, red LED flashing	Turbo, 2,5 %,30 %, 100 %, SOS, Red LED light, Flood, red: 50 %, 100 %, flashing	Turbo, 3 %,25 %, 100 %, SOS, Red LED light, red: 50 %, 100 %, flashing	AUTO, 100 %,50 %, 2 %,flicker	100 %, 50 %,2 %, flicker
Max. luminious time	100 h	60 h	100 h	45 h	69 h	69 h
Rechargeable	yes	yes	yes	yes	yes	–
Power supply	Li-ion (2 550 mAh) / 2× CR123A	Li-ion (2 600 mAh)	Li-Po (1 600 mAh)	Li-Po (800 mAh)	3× AAA (HR03)	3× AAA
Waterproof	IPX8	IPX4	IPX6	IPX6	IPX6	IPX6
Special features	button lock mode	button lock mode	button lock mode	button lock mode	button lock mode, automatic dimming	touchless dimming
Dimensions	91,5 × 39 × 51 mm	106 × 27 × 27 mm	56 × 38 × 39 mm	56 × 38 × 34 mm	34 × 46 × 56 mm	34 × 46 × 56 mm
Weight	90/151 g	153 g	59,5 g	44 g	110 g	110 g








Order code	P8574	P8573	P8584	P8583	P8582	P8551P | P8551B
Type	CHW54	CHW53	CH44	CH43	CH42	CH31
Usage	WORK	WORK	OUTDOOR	OUTDOOR/SPORT	MULTIUSE	MULTIUSE
Source of light	2× CREE SMD LED	2× CREE SMD LED	2× SMD LED	2× SMD LED + LED	2× SMD LED	4× LED
Max. light output	375 lm	280 lm	300 lm	150 lm	110 lm	40 lm
Max. beam distance	110 m	90 m	60 m	45 m	40 m	8 m
Number of lighting modes	4	6	6	5	4	3
Lighting modes	Turbo; 100 %, 30 %, 17 %	Turbo; 100 %,40 %, 25 %, red LED light, flashing	100 %, 60 %,25 %, 12 %, red LED light, flashing	100 %, 45 %,25 %, red LED light, flashing	100 %, 65 %, 40 %, flicker	100 %, 30 %, flicker
Max. luminious time	26 h	25 h	36 h	36 h	15 h	6 h
Rechargeable	–	–	–	–	–	–
Power supply	3× AAA	3× AAA	3× AAA	3× AAA	3× AAA	2× CR2025
Waterproof	IPX5	IPX5	IPX4	IPX4	IP43	–
Special features	touchless dimming	–	touchless light swithing	–	–	–
Dimensions	66 × 49 × 37 mm	66 × 49 × 37 mm	61 × 47 × 37 mm	61 × 47 × 37 mm	59 × 46 × 34 mm	37 × 36 × 20 mm
Weight	62 g/98 g	95 g	42 g/78 g	42 g/78 g	29 g/65 g	31 g

Headlamps







Order code	P3537	P3532	P3528	P3536	P3541
Source of light	COB LED	COB LED (white, red)	COB LED	LED + COB LED (green, red)	COB LED + LED
Maximal light output	110 lm	125 lm	150 lm	220 lm	380 lm
Maximal beam distance	15 m	20 m	20 m	100 m	30 m
Number of lighting modes	3	3	3	7	4
Lighting modes	COB LED 100 %, COB LED 50 %, blinking	COB LED 100 %, COB LED 50 %, COB LED – red blinking	COB LED 100 %, COB LED 50 %, SOS	COB LED + LED 100 %, LED 100 %, LED 50 %, blinking, COB LED – white, COB LED – red, COB LED – green	COB LED 100 %, COB LED 50 %, LED 100 %, LED 50 %
Runtime	20–40 hrs	9–19 hrs	8–27 hrs	45–160 hrs	3–12 hrs
Waterproof	–	IP44	–	IP43	IP43
Rechargeable	–	–	–	–	yes
Power supply	3× AAA	3× AAA	3× AAA	3× AAA	Li-pol (1 200 mAh)
Special features	–	battery protection	–	quick switch ON/OFF	hand-operated switching, quick switch ON/OFF, battery protection
Dimensions	60 × 18 × 40 mm	69 × 43 × 46 mm	60 × 40 × 40 mm	65 × 45 × 50 mm	300 × 3.2 × 20 mm
Weight	21 g/56 g	54 g/89 g	53 g/88 g	65 g/100 g	73 g







Order code	P3521	P3539	P3531	P3534	P3535
Source of light	LED + 2× red LED	CREE LED + 2× red LED	CREE LED + COB LED (green, red) + red LED (rear light)	CREE LED	CREE LED + 4× SMD
Maximal light output	85 lm	330 lm	330 lm	230 lm	110 lm
Maximal beam distance	65 m	200 m	65 m	80 m	55 m
Number of lighting modes	4	5	7	4	3
Lighting modes	LED 100 %, LED 50 %, red LED flashing, red LED blinking	CREE LED 100 %, CREE LED 50 %, SOS, red LED flashing, red LED blinking	COB LED + CREE LED 100 %, CREE LED 100 %, CREE LED 50 %, CREE LED – blinking, COB LED – white, COB LED – green, COB LED – red	CREE LED 100 %, CREE LED 50 %, CREE LED 20 %, SOS	CREE LED 100 %, CREE LED 50 %, 4× SMD LED
Runtime	50–120 hrs	50–87 hrs	18–72 hrs	3–13 hrs	3–7 hrs
Waterproof	IP43	IP43	IP44	–	–
Rechargeable	–	–	–	yes	yes
Power supply	3× AAA	3× AAA	3× AAA + 1× CR2032	Li-pol (1 200 mAh)	Li-pol (850 mAh)
Special features	quick switch ON/OFF	quick switch ON/OFF, focus	quick switch ON/OFF	hand-operated switching, quick switch ON/OFF, battery protection	quick switch ON/OFF, battery protection
Dimensions	58 × 38 × 44 mm	60 × 48 × 43 mm	65 × 32 × 39 mm	61 × 37 × 31 mm	47 × 31 × 54 mm
Weight	54 g/89 g	70 g/105 g	80 g/115 g	60 g	64 g

EMOS

LED work lights









Order code	P4536	P4533	P4534	P4539	P4532	P4525	P4518
Type	RECHARGEABLE						
Source of light	2× COB LED	COB LED	COB LED	COB LED	COB LED + LED	COB LED + 5× LED	COB LED + LED
Maximal light output	2 000 lm	1 000 lm	600 lm	1 000 lm	470 lm	500 lm	380 lm
Maximal beam distance	70 m	45 m	35 m	40 m	45 m	30 m	27 m
Number of lighting modes	5	3	2	3	3	3	3
Lighting modes	2× COB LED 100 %, 2× COB LED 50 %, 1× COB LED 100 %, 1× COB LED 50 %, 1× COB LED 25 %	COB LED 100 %, COB LED 50 %, COB LED 20 %	COB LED 100 %, COB LED 50 %	COB LED 100 %, COB LED 50 %, COB LED 25 %	COB LED 100 %, COB LED 50 %, LED	COB LED 50 %, COB LED 100 %, 5× LED	COB LED 50 %, COB LED 100 %, LED 100 %
Runtime	3.5–14.5 hrs	3.5–15.5 hrs	2.5–3.5 hrs	3–17 hrs	2.5–8 hrs	2–26 hrs	3.5–24 hrs
Focus	–	–	–	–	–	–	–
Shock-resistance	yes	yes	yes	yes	yes	yes	yes
Waterproof	–	yes (IP44)	yes (IP44)	yes (IP44)	–	yes (IP43)	yes (IP43)
Rechargeable	yes	yes	yes	yes	yes	yes	yes
Power supply	Li-Ion accumulator	Li-Ion accumulator	Li-Ion accumulator	Li-Ion	Li-Ion accumulator	Li-Ion accumulator	Li-Ion accumulator
Battery type	8 000 mAh/3.7 V	4 400 mAh/3.7 V	3 000 mAh/3.7 V	2 200 mAh/3.7 V	1 800 mAh/3.7 V	2 000 mAh/3.7 V	2 500 mAh/3.7 V
Batteries included	yes	yes	yes	yes	yes	yes	yes
Charging time	7 hrs	7.5 hrs	3.5 hrs	3 hrs	3.5 hrs	3 hrs	4 hrs
Power connector type	USB-C	micro USB-B	micro USB-B	USB-C	5.5 × 2.1/10 mm	3.0 × 1.0/12 mm	3.0 × 1.0/12 mm
Led indication of the charging process	yes	yes	yes	yes	yes	yes	yes
Led indication of the accumulator state	yes	yes	yes	–	–	–	–
Special features	quick switch ON/OFF, battery protection	quick switch ON/OFF, battery protection	battery protection, powerbank function	powerbank function, quick switch ON/OFF, battery protection	quick switch ON/OFF, battery protection	quick switch ON/OFF, battery protection	quick switch ON/OFF, battery protection
Facilities	swivel handle, 4× magnet	swivel handle	swivel handle	magnet, stand, clip	swivel handle, clip, 1× hook, 2× magnet	swivel handle, 1× hook, 3× magnet	swivel handle, 1× hook, 2× magnet
Accessories	USB cable	USB cable	USB cable	USB cable	charging adapter	charging adapter + car adapter	charging adapter, car adapter
Material	ABS plastic + rubber	ABS plastic + rubber	Nylon + TPR	ABS plastic	ABS plastic + rubber	ABS plastic + rubber	ABS plastic
Dimensions	214 × 140 (280) × 56 mm	172 × 45 × 126 mm	172 × 45 × 126 mm	104 × 39 × 94 mm	52 × 41 × 242 mm	76 × 66 × 317 mm	56 × 50 × 240 mm

EMOS®

LED work lights










Order code	P4535	P4538	P4537	P4531	P4113	P4112	P4110	P3888
Type	RECHARGEABLE				BATTERY			
Source of light	2× COB LED + LED	SMD LED + LED	COB LED + SMD LED	COB LED + LED	COB LED	2× COB LED + LED	LED + COB LED	COB LED
Maximal light output	670 lm	700 lm	330 lm	400 lm	700 lm	350 lm	360 lm	180 lm
Maximal beam distance	40 m	45 m	45 m	40 m	35 m	110 m	25 m	45 m
Number of lighting modes	3	3	3	3	3	2	3	2
Lighting modes	1× COB LED 100 %, 2× COB LED 100 %, LED 100 %	SMD LED BOOST, SMD LED 100 %, LED 100 %	COB LED 100 %, COB LED 33 %, SMD LED 100 %	COB LED 100 %, COB LED 50 %, LED 100 %	COB LED 35 %, COB LED 60 %, COB 100 %	2× COB LED 100 %, LED 100 %	COB LED 100 %, COB LED 50 %, LED	COB LED 100 %, COB LED 50 %
Runtime	2–10 hrs	3–6 hrs	3–7 hrs	3–8.5 hrs	8–14 hrs	10–20 hrs	8 hrs	16–24 hrs
Focus	–	–	–	–	–	–	–	–
Shock-resistance	–	–	yes	yes	yes	–	yes	yes
Waterproof	–	–	yes (IP43)	yes (IP43)	yes (IP43)	–	–	–
Rechargeable	yes	yes	yes	yes	–	–	–	–
Power supply	Li-Ion accumulator	Li-Ion	Li-Ion	Li-Ion accumulator	4× AA	3× AA	4× AA	3× AAA
Battery type	2 200 mAh/3.7 V	1 200 mAh/3.7 V	1 200 mAh/3.7 V	2 000 mAh/3.7 V	LR6 (1,5 V)	LR6 (1,5 V)	LR6 (1,5 V)	LR03 (1.5 V)
Batteries included	yes	yes	yes	yes	–	–	–	–
Charging time	3 hrs	2 hrs	2–4 hrs	3 hrs	–	–	–	–
Power connector type	USB-C	USB-C	micro USB-B	micro USB-B	–	–	–	–
Led indication of the charging process	yes	yes	yes	yes	–	–	–	–
Led indication of the accumulator state	yes	yes	yes	yes	–	–	–	–
Special features	powerbank function, quick switch ON/OFF, battery protection	battery protection function, light BOOST function	quick switch ON/OFF, battery protection	quick switch ON/OFF, battery protection	quick switch ON/OFF	–	quick switch ON/OFF	–
Facilities	1× hook, 4× magnet	2× magnet	swivel handle, 1× clip, 1× magnet, 1× hook	swivel handle, clip, 1× hook, 1× magnet	swivel handle	swivel handle	break-over handle, 1× hook, 1× magnet	break-over handle, 1× hook, 2× magnet
Accessories	USB cable	USB cable	USB cable	USB cable	–	–	–	–
Material	ABS + TPR + rubber	ABS plastic + rubber	ABS plastic + rubber	plastic + rubber	plastic	plastic	ABS plastic + rubber	ABS plastic
Dimensions	35 × 33 × 257 mm	37 × 14 × 240 mm	41 × 29 × 154 mm	52 × 32 × 165 mm	145 ×105 × 35 mm	135 × 100 × 40 mm	56 × 31 × 153 mm	59 × 30 × 133 mm

EMOS

Work lights





Order code	ZS2812	ZS2822	ZS2832
Series	ACCO		
Source of light	LED	LED	LED
Power	10 W	20 W	30 W
Light output	1 000 lm	2 000 lm	3 000 lm
Luminous efficiency	100 lm/W	100 lm/W	100 lm/W
Colour temperature	6 500 K	6 500 K	6 500 K
Light colour	cool white	cool white	cool white
IP rating	IP54	IP54	IP54
Colour rendering index (CRI)	Ra > 80	Ra > 80	Ra > 80
Power supply	accumulator	accumulator	accumulator
Battery	Li-Ion 4 400 mAh	Li-Ion 6 600 mAh	Li-Ion 10 000 mAh
AKU lighting time	3 – 10 hours	3 – 10 hours	3 – 10 hours
Voltage	5 V DC 220–240 V AC	5 V DC 220–240 V AC	5 V DC 220–240 V AC
Dimming	yes	yes	yes
Lifetime	25 000 hours	25 000 hours	25 000 hours
Working temperature range	-20 °C to +40 °C	-20 °C to +40 °C	-20 °C to +40 °C
Beam angle	120°	120°	120°
Dimensions	212 × 177 × 224 mm	266 × 220 × 273 mm	292 × 219 × 273 mm
Body material	aluminum	aluminum	aluminum
Material of the diffuser	glass	glass	glass
Mechanical impact protection	–	–	–







Order code	ZS3322	ZS3332	ZS3342	ZS2221.2	ZS2231.2
Series	ILIO			HOBBY SLIM	
Source of light	LED	LED	LED	LED	LED
Power	21 W	31 W	51 W	2× 20,5 W	2× 30 W
Light output	1 900 lm	2 800 lm	4 600 lm	2× 1 600 lm	2× 2 400 lm
Luminous efficiency	90 lm/W	90 lm/W	90 lm/W	80 lm/W	80 lm/W
Colour temperature	4 000 K	4 000 K	4 000 K	4 000 K	4 000 K
Light colour	neutral white	neutral white	neutral white	neutral white	neutral white
IP rating	IP44	IP44	IP44	IP65	IP65
Colour rendering index (CRI)	Ra > 80	Ra > 80	Ra > 80	Ra > 80	Ra > 80
Power supply	mains powered	mains powered	mains powered	mains powered	mains powered
Battery	–	–	–	–	–
AKU lighting time	–	–	–	–	–
Voltage	220–240 V~	220–240 V~	220–240 V~	220–240 V~	220–240 V~
Dimming	–	–	–	–	–
Lifetime	25 000 hours	25 000 hours	25 000 hours	25 000 hours	25 000 hours
Working temperature range	-20 °C to +40 °C	-20 °C to +40 °C	-20 °C to +40 °C	-20 °C to +40 °C	-20 °C to +40 °C
Beam angle	110°	110°	110°	120°	120°
Dimensions	215 × 185 × 250 mm	240 × 185 × 275 mm	270 × 185 × 275 mm	860 × 860 × 1 850 mm	860 × 860 × 1 850 mm
Body material	aluminum	aluminum	aluminum	aluminum	aluminum
Material of the diffuser	plastic (PC)	plastic (PC)	plastic (PC)	glass	glass
Mechanical impact protection	IK10	IK10	IK10	IK08	IK08

Door Videophones and Video Doorbells






Order code	H4010	H3010	H2017	H2050
Series	GoSmart	ADVANCED	BASIC	
Type	IP-700A	EM-10AHD	EM-07HD	EM-03M 2WIRE
LCD size	7''	7''	7''	7''
LCD resolution	Full HD 1080p	1080p	720p	480p
Button design	without buttons, touchscreen	touchscreen	mechanical	mechanical
Number of conductors	4	4	4	2
Power supply	12 V DC	12 V DC	12 V DC	15 V DC
Memory	yes	yes	–	–
Network features	yes	–	–	–
Lock / gate control	yes/yes	yes/yes	yes/yes	yes/yes
Number of inputs	2× camera unit, 2× CCTV	2× camera unit, 2× CCTV	2× camera unit, 2× CCTV	1× camera unit
Monitor dimensions	175 × 118 × 25 mm	175 × 125 × 20 mm	233 × 23 × 160 mm	152 × 215 × 18 mm
Camera unit dimensions	142 × 44 × 21 mm	135 × 50 × 25 mm	64 × 46 × 145 mm	141 × 63 × 40 mm
View angle	120/160°	120/160°	80°	80°
Type of illumination	IR + IR CUT	IR + IR CUT	IR	IR
Water-resistant camera unit	yes	yes	yes	yes
Shock-resistant camera unit	yes	yes	yes	yes
Intercom	yes	yes	yes	–
Motion detection	yes	yes	–	–





Order code	H4030	H4031	H4032
Series	GoSmart		
Type	IP-09D	IP-09C	IP-15S
Camera resolution	1 920 × 1 080	1 920 × 1 080	1 920 × 1 080
Number of buttons	1	1	1
Power supply	Li-Ion battery 2× 18650	12 V DC	5 V DC/1 A, AC 12~24 V
Network features/WiFi	yes	yes	yes
Lock/gate control	yes/–	yes/–	–/–
Camera unit dimensions	149 × 63 × 46 mm	149 × 63 × 46 mm	145 × 57 × 41 mm
Camera viewing angle	110°	110°	130°
Type of illumination	IR + IR CUT	IR + IR CUT	IR
Water-resistant camera unit	yes	yes	yes
Shock-resistant camera unit	–	–	–
Motion detection	yes	yes	yes
Additional indoor bell	yes	yes	yes

EMOS® Weather stations









Order code	E5059	E6016	E8466	E5111	E6018	E8670	E0387
Version	wireless	wireless	wireless	wireless	wireless	wireless	wireless
Clock	wifi controlled	controlled by DCF signal	controlled by DCF signal	controlled by DCF signal	controlled by DCF signal	controlled by DCF signal	controlled by DCF signal
Display backlight	yes	yes	yes	yes	yes	yes	yes
Wall-mounted	yes	yes	–	yes	yes	yes	yes
Electronic panel backlight	yes	yes	–	yes	yes	yes	yes
Time zones	yes	yes	–	yes	yes	yes	yes
Projection	–	–	time and temperature projection	–	–	–	–
Date	yes	yes	yes	yes	yes	yes	yes
Calendar	yes	yes	yes	yes	yes	yes	yes
Alarm clock	yes	yes, 2×	yes, 2×	yes, 2×	yes, 2×	yes	yes
Outside temperature	-40 °C up +70 °C, to 0,1 °C	-30 °C up +60 °C, to 0,1 °C	-20 °C up +60 °C, to 0,1 °C	-40 °C up +70 °C, to 0,1 °C	-50 °C up +70 °C, to 0,1 °C	-30 °C up +60 °C, to 0,1 °C	-40 °C up +60 °C, to 0,1 °C
Inside temperature	-10 °C up +50 °C, to 0,1 °C	-10 °C up +50 °C, to 0,1 °C	-5 °C up +50 °C, to 0,1 °C	-10 °C up +50 °C, to 0,1 °C	-10 °C up +50 °C, to 0,1 °C	-10 °C up +50 °C, to 0,1 °C	-10 °C up +50 °C, to 0,1 °C
Outside humidity	1 % up 99 % RV, to 1 %	1 % up 99 % RV, to 1 %	–	20 % up 95 % RV, to 1 %	1 % up 99 % RV, to 1 %	10 % up 99 % RV, to 1 %	1 % up 99 % RV, to 1 %
Inside humidity	1 % up 99 % RV, to 1 %	1 % up 99 % RV, to 1 %	–	1 % up 99 % RV, to 1 %	1 % up 99 % RV, to 1 %	10 % up 99 % RV, to 1 %	1 % up 99 % RV, to 1 %
Minimum and maximum temperature	yes	yes	yes	yes	yes	yes	yes
Weather forecast	yes	yes	yes	yes	yes	yes	yes
Temperature warning	yes	yes	–	–	yes	yes	yes
Temperature/pressure trend	yes/–	yes/yes	yes/–	yes/yes	yes/yes	yes/–	yes/yes
Barometer/precipitation gauge/anemometer	yes/yes/yes	yes/yes/yes	–/–/–	yes/–/–	yes/–/–	yes/yes/–	yes/–/–
Altitude correction	yes	yes	–	–	yes	–	–
Phases of the moon	yes	yes	–	yes	yes	–	yes
Sensor range	up 50 m	up 100 m	up 30 m	up 50 m	up 100 m	up 50 m	up 80 m
Optional additional sensor	–	up to 3 temperature and humidity sensors (E06018), 1 anemometer sensor (E06016)	up to 3 sensors (E08400)	up to 3 sensors (E05018)	up to 3 sensors (E06018)	–	up to 3 sensors (E00387)
Wire probe for sensor	–	–	–	yes	–	–	–
Sensor's power supply	1× 3,7 V 4 400 mAh Li-ion 21700T	4× 1,5 V AA (not included)	2× 1,5 V AA (not included)	2× 1,5 V AAA (not included)	2× 1,5 V AAA (not included)	2× 1,5 V AA (not included)	2× 1,5 V AA (not included)
Station's power supply	3× 1,5 V AAA (not included)	3× 1,5 V AAA (not included)	1× CR2032 (included)	3× 1,5 V AAA (not included)	3× 1,5 V AAA (not included)	3× 1,5 V AAA (not included)	3× 1,5 V AA (not included)
Network adapter	yes, 5 V DC/1 200 mA (included)	yes, 5 V DC/300 mA (included)	yes, 4,5 V DC/300 mA (included)	yes, 5 V DC/600 mA (included)	yes, 5 V DC/300 mA (included)	yes, 5 V DC/1 000 mA (included)	yes, 5 V DC/1 200 mA (included)
Dimension of the main unit	30 × 215 × 173 mm	17 × 192 × 127 mm	56 × 163 × 80 mm	26 × 197 × 125 mm	17 × 192 × 127 mm	29 × 205 × 127 mm	30 × 200 × 130 mm
Sensor's dimension	151 × 396 × 313 mm	250 × 160 × 100 mm	35 × 65 × 100 mm	21 × 60 × 100 mm	15 × 62 × 100 mm	117 × 117 × 164 mm	20 × 38 × 100 mm
Display size	163 × 120 mm	168 × 93 mm	102 × 42 mm	164 × 90 mm	168 × 93 mm	169 × 94 mm	168 × 91 mm

EMOS®

Weather stations










Order code	E0389	E8647	E3070	E3003	E0352	E5080	E0316	E0117N
Version	wireless	wireless	wireless	wireless	wireless	wireless	wireless	wire
Clock	wifi controlled	yes, quartz	controlled by DCF signal	controlled by DCF signal	controlled by DCF signal	controlled by DCF signal	controlled by DCF signal	yes, quartz
Display backlight	yes	yes	yes	yes	–	yes	yes	–
Wall-mounted	yes	yes	–	–	yes	yes	yes	–
Electronic panel backlight	yes	yes	–	–	–	yes	yes	–
Time zones	–	–	yes	yes	yes	yes	yes	–
Projection	–	–	–	–	–	–	–	–
Date	yes	–	yes	yes	yes	yes	yes	yes
Calendar	yes	–	yes	yes	yes	yes	yes	yes
Alarm clock	yes	yes	yes	yes	yes	yes, 2×	yes	yes
Outside temperature	based on data from the server	-50 °C up +70 °C, to 0,1 °C	-30 °C up +60 °C, to 0,1 °C	-50 °C up +70 °C, to 0,1 °C	-40 °C up +60 °C, to 0,1 °C	-40 °C up +70 °C, to 0,1 °C	-20 °C up +60 °C, to 0,1 °C	-50 °C up +70 °C, to 0,1 °C
Inside temperature	-10 °C up +50 °C, to 0,1 °C	-10 °C up +50 °C, to 0,1 °C	0 °C up +50 °C, to 0,1 °C	-10 °C up +50 °C, to 0,1 °C	-10 °C up +50 °C, to 0,1 °C	-10 °C up +50 °C, to 0,1 °C	0 °C up +50 °C, to 0,1 °C	-10 °C up +50 °C, to 0,1 °C
Outside humidity	based on data from the server	20 % up 95 % RV, to 1 %	–	20 % up 95 %, to 1 %	20 % up 95 % RV, to 1 %	20 % up 95 % RV, to 1 %	20 % up 99 % RV, to 1 %	–
Inside humidity	10 % up 99 % RV, to 1 %	20 % up 95 % RV, to 1 %	20 % up 90 % RV, to 1 %	20 % up 95 %, to 1 %	1 % up 99 % RV, to 1 %	1 % up 99 % RV, to 1 %	20 % up 99 % RV, to 1 %	20 % up 95 % RV, to 1 %
Minimum and maximum temperature	yes	yes	–	yes	yes	yes	yes	yes
Weather forecast	yes	yes	yes	yes	yes	yes	yes	yes
Temperature warning	–	–	–	yes	–	–	–	–
Temperature/pressure trend	–/–	–/–	yes/–	yes/–	yes/–	yes/yes	yes/–	–/–
Barometer/precipitation gauge/anemometer	yes/–/yes	–/–/–	–/–/–	–/–/–	–/–/–	yes/–/–	yes/–/–	–/–/–
Altitude correction	–	–	–	–	–	yes	–	–
Phases of the moon	–	–	yes	yes	yes	–	yes	yes
Sensor range	–	up 50 m	up 30 m	up 30 m	up 30 m	up 30 m	up 60 m	–
Optional additional sensor	–	–	up to 3 sensors (E03070)	up to 3 sensors (E05018)	up to 3 sensors (E05018)	up to 3 sensors (E05018)	up to 3 sensors (E05018)	–
Wire probe for sensor	–	–	–	–	–	yes	–	1,9 m
Sensor's power supply	–	2× 1,5 V AAA (not included)	2× 1,5 V AAA (not included)	2× 1,5 V AAA (not included)	2× 1,5 V AA (not included)	2× 1,5 V AAA (not included)	2× 1,5 V AAA (not included)	–
Station's power supply	3× 1,5 V AA (not included)	2× 1,5 V AAA (not included)	3× 1,5 V AAA (not included)	2× 1,5 V AA (not included)	2× 1,5 V AAA (not included)	3× 1,5 V AA (not included)	3× 1,5 V AA (not included)	2× LR1130 (included)
Network adapter	yes, 5 V DC/1 200 mA (included)	yes, micro USB 5 V/1 A (not included)	–	–	–	–	–	–
Dimension of the main unit	29 × 200 × 130 mm	20 × 85 × 96 mm	52 × 139 × 100 mm	50 × 120 × 180 mm	23 × 76 × 126 mm	27 × 130 × 130 mm	30 × 166 × 131 mm	16 × 70 × 109 mm
Sensor's dimension	–	25 × 50 × 95 mm	24 × 44 × 100 mm	23 × 60 × 92 mm	21 × 38 × 100 mm	21 × 60 × 100 mm	29 × 60 × 96 mm	–
Display size	168 × 91 mm	65 × 76 mm	111 × 61 mm	80 × 120 mm	50 × 81 mm	105 × 105 mm	110 × 73 mm	45 × 79 mm

Reels for outdoor use



Order code	P19223	P19224	P19222	P08215	P19733	P192250	P19220
Inclusion	NEOPRENE CABLE FOR MODERATE MECHANICAL LOAD, OIL-RESISTANT						
Warranty	5 years				2 years		
Conductor	H05VV-F 3 G				H07RN-F5G		H07RN-F 3 G
Conductor diameter	1,5 mm²	2,5 mm²	1,5 mm²	1,5 mm²	2,5 mm²	1,5 mm²	2,5 mm²
Maximum reeled load	4,35 A max./1 000 W	5,2 A max./1 200 W	4,35 A max./1 000 W	4,35 A max./1 000 W	230 V~: 6,52 A max./ 1 500 W; 400 V~: 6,25 A max./ 2 500 W	230 V~: 4,35 A max./ 1 000 W; 400 V~: 6,25 A max./ 2 500 W	6,52 A max./1 500 W
Maximum unreeled load	16 A max./3 680 W	16 A max./3 680 W	16 A max./3 680 W	13,04 A max./3 000 W	230 V~: 15,22 A max./ 3 500 W; 400 V~: 16 A max./ 6 400 W	230 V~: 13 A max./ 3 000 W; 400 V~: 12,5 A max./ 5 000 W	15,22 A max./3 500 W
Length	50 m	40 m	25 m	15 m	33 m	25 m	50 m
Metal body	yes	yes	yes	yes	–	–	–
Suitable for construction sites	yes	yes	yes	yes	yes	yes	yes
Indoor use	yes	yes	yes	yes	yes	yes	yes
Temperature range for cable use	from -25°C to +60°C						
Guide loop for easy cable reeling	yes	yes	yes	yes	–	–	–
Outdoor use	yes | IP44						
LED light	–	–	–	20 W/1 600 lm	–	–	–



Order code	P08250	P08225	P19625	P19221
Inclusion	RUBBER CABLE FOR STANDARD MECHANICAL STRESS			
Warranty	2 years			
Conductor	H05RR-F 3 G			
Conductor diameter	1,5 mm²		2,5 mm²	
Maximum reeled load	4,8 A max./1 100 W	4,8 A max./1 100 W	6 A max./1 600 W	6,52 A max./1 500 W
Maximum unreeled load	16 A max./3 680 W	16 A max./3 680 W	16 A max./3 680 W	15,22 A max./3 500 W
Length	50 m	25 m	25 m	50 m
Metal body	–	–	–	–
Suitable for construction sites	–	–	–	–
Indoor use	yes	yes	yes	yes
Temperature range for cable use	from -25°C to +60°C			
Guide loop for easy cable reeling	–	–	–	–
Outdoor use	yes | IP44			
LED light	–	–	–	–

Reels for indoor use



Order code	P19427	P092501	P092251	P09250	P09225	P09240
Inclusion	PVC CABLE FOR STANDARD MECHANICAL STRESS					
Warranty	2 years					
Conductor	H05VV-F 3 G					
Conductor diameter	1,5 mm^2					
Maximum reeled load	4,35 A max./1 000 W	4,8 A max./1 100 W	4,8 A max./1 100 W	4,8 A max./1 100 W	4,8 A max./1 100 W	4,8 A max./1 100 W
Maximum unreeled load	13 A max./3 000 W	16 A max./3 680 W	16 A max./3 680 W	16 A max./3 680 W	16 A max./3 680 W	16 A max./3 680 W
Length	25 m	50 m	25 m	50 m	25 m	40 m
Temperature range for cable use	from 4 °C to 60 °C					
Guide loop for easy cable reeling	–	yes	yes	yes	yes	yes
Outdoor use	–					



Order code	P09240M	P09225M	P09220	P19515	P19510
Inclusion	PVC CABLE FOR STANDARD MECHANICAL STRESS				
Warranty	2 years				
Conductor	H05VV-F 3 G				
Conductor diameter	2,5 mm^2		1,0 mm^2		
Maximum reeled load	6 A max./1 380 W	6 A max./1 600 W	4,8 A max./1 100 W	4 A max./920 W	4 A max./920 W
Maximum unreeled load	16 A max./3 600 W	16 A max./3 600 W	10 A max./2 300 W	10 A max./2 300 W	10 A max./2 300 W
Length	40 m	25 m	20 m	15 m	10 m
Temperature range for cable use	from 4 °C to 60 °C				
Guide loop for easy cable reeling	–	–	yes	yes	yes
Outdoor use	–				

EMOS

Data cables












Order code	S9128	S9134	S9121	S9129	S9221	S9222
Type	UTP CAT 5E	UTP CAT 5E	UTP CAT 5E	UTP CAT 5E	F/UTP CAT 5E	F/UTP CAT 5E
DESIGN PARAMETERS						
Twisted pair	4×	4×	4×	4×	4×	4×
Number of wires	4× 2	4× 2	4× 2	4× 2	4× 2 + 1	4× 2 + 1
Shielding	–	–	–	–	aluminium/PET foils	aluminium/PET foils
Foil	–	–	–	–	7/12 – 18 mm	7/12 – 18 mm
Internal conductor	copper-clad aluminium (CCA)	copper wire	copper wire	copper wire	copper wire	copper wire
AWG	24	24	24	24	24	24
Diameter of conductors (mm)	0,51	0,45	0,48	0,48	0,48	0,48
Shielding of conductors	HDPE	HDPE	HDPE	HDPE	HDPE	HDPE
Average thickness (mm)	0,22	0,22	0,22	0,22	0,22	0,22
Strength member	nylon 150D	nylon 150D	nylon 150D	nylon 150D	CuSn wire 0,4 mm	CuSn wire 0,4 mm
Cable jacket	PVC	PVC	PVC	LSOH (LSZH)	PVC	LSOH (LSZH)
Jacket thickness (mm)	1,1	1,1	1,1	1,1	1,1	1,1
Diameter of cable jacket (mm)	5,2	5	5,2	5,2	6	6
Colour	grey	grey	grey	purple	grey	purple
PACKAGING						
Material	 305 m/paper box 5-layer cardboard with print	 305 m/paper box 5-layer cardboard with print	 305 m/paper box 5-layer cardboard with print	 305 m/paper box 5-layer cardboard with print	 305 m/ paper box 5-layer cardboard with print	 305 m/ paper box 5-layer cardboard with print
MECHANICAL PROPERTIES						
Max. DC insulation resistance	94,8	94,8	94,8	94,8	94,8	94,8
Operating temperature	60	60	60	60	60	60
EU DIRECTIVE						
EU Directive 2011/65	RoHS	RoHS	RoHS	RoHS	RoHS	RoHS
EU Directive 305/2011	CPR	CPR	CPR	CPR	CPR	CPR
MEETS HARMONISED STANDARDS	ČSN EN 50173-1 ed. 4:2019 | ANSI/EIA/TIA 568A, 568B | ISO/IEC 11801 | ČSN EN 50575:2015 A1:2017	ČSN EN 50173-1 ed. 4:2019 | ANSI/EIA/ TIA 568A, 568B | ISO/ IEC 11801 | ČSN EN 50575:2015 A1:2017	ČSN EN 50173-1 ed. 4:2019 | ANSI/EIA/TIA 568A, 568B | ISO/IEC 11801 | ČSN EN 50575:2015 A1:2017	ANSI/EIA/TIA 568A, 568B | ISO/IEC 11801 | IEC 60754-2 | ČSN EN 50173-1 ed. 4:2019 | ČSN EN 50575:2015 A1:2017 | ČSN EN 60754-1:2015 | ČSN EN 60754-2:2015 | ČSN EN 60754-1:2015 ČSN EN 60754-2:2015 | IEC/ČSN EN 60332-1-2 / IEC/ČSN EN 61034-2	ČSN EN 50173-1 ed. 4:2019 | ANSI/EIA/TIA 568A, 568B | ISO/IEC 11801 | ČSN EN 50575:2015 A1:2017	ANSI/EIA/TIA 568A, 568B | ISO/IEC 11801 | ČSN EN 50173-1 ed. 4:2019 | IEC 60754-2 | ČSN EN 50575:2015 A1:2017 | ČSN EN 60754-1:2015 | ČSN EN 60754-2:2015 | IEC/ČSN EN 60332-1-2 ČSN EN 60754-1:2015 | ČSN EN 60754-2:2015 | IEC/ČSN EN 61034-2
CPR CERTIFICATION						
Euroclass fire rating	Eca	Eca	Eca	Dca-s2-d2-a1	Eca	Dca-s2-d2-a2
Hazardous substances	–	–	–	–	–	–

EMOS Data cables



Order code	S9310	S9320	S9131	S9230	S9132
Type	STP CAT6A	FFTP CAT6A	UTP CAT 6	F/UTP CAT 6	UTP CAT 6
DESIGN PARAMETERS					
Twisted pair	4×	4×	4×	4×	4×
Number of wires	4×2+1	4×2+1	4×2	4×2+1	4×2
Shielding	aluminium/PET foils	aluminium/PET foils	–	aluminium/PET foils	–
Foil	7/12 – 18 mm	7/12 – 18 mm	–	7/12 – 18 mm	–
Internal conductor	copper wire	copper wire	copper wire	copper wire	copper wire
AWG	23	23	23	23	23
Diameter of conductors (mm)	0,56	0,56	0,55	0,55	0,55
Shielding of conductors	HDPE	HDPE	HDPE	HDPE	HDPE
Average thickness (mm)	0,22	0,22	0,22	0,22	0,22
Strength member	nylon 150D	nylon 150D	nylon 150D	CuSn wire 0,4 mm	nylon 150D
Cable jacket	LSZH	LSZH	PVC	LSOH (LSZH)	LSOH (LSZH)
Jacket thickness (mm)	1,1	1,1	1,1	1,1	1,1
Diameter of cable jacket (mm)	7,6	7,6	6,3	6,3	6,3
Colour	orange	grey	grey	purple	purple
PACKAGING					
Material	 500 m/ wooden coil	 500 m/ wooden coil	 305 m/ paper box 5-layer cardboard with print	 500 m/ wooden coil	 305 m/ paper box 5-layer cardboard with print
MECHANICAL PROPERTIES					
Max. DC insulation resistance	94,8	94,8	94,8	94,8	94,8
Operating temperature	-20 °C to 60 °C	-20 °C to 60 °C	60	60	60
EU DIRECTIVE					
EU Directive 2011/65	RoHS	RoHS	RoHS	RoHS	RoHS
EU Directive 305/2011	CPR	CPR	CPR	CPR	CPR
MEETS HARMONISED STANDARDS					
	ANSI/EIA/TIA 568A, 568B | ISO/IEC 11801 | ČSN EN 50173-1 ed. 4:2019 | IEC 60754-2 | ČSN EN 50575:2015 A1:2017 | ČSN EN 60754-1:2015 | ČSN EN 60754-2:2015 | IEC/ČSN EN 60332-1-2 | ČSN EN 60754-1:2015 | ČSN EN 60754-2:2015 | IEC/ČSN EN 61034-2	ANSI/EIA/TIA 568A, 568B | ISO/IEC 11801 | ČSN EN 50173-1 ed. 4:2019 | IEC 60754-2 | ČSN EN 50575:2015 A1:2017 | ČSN EN 60754-1:2015 | ČSN EN 60754-2:2015 | IEC/ČSN EN 60332-1-2 | ČSN EN 60754-1:2015 | ČSN EN 60754-2:2015 | IEC/ČSN EN 61034-2	ČSN EN 50173-1 ed. 4:2019 | IEC 61156-5 Ed. 2 | ISO/IEC 11801 CLASS | ČSN EN 50288-6-1 ed. 2:2014 | ANSI/EIA/TIA 568B.2-1 Cat 6 | ČSN EN 50575:2015 A1:2017	ANSI/EIA/TIA 568A, 568B | ISO/IEC 11801 | ČSN EN 50173-1 ed. 4:2019 | IEC 60754-2 | ČSN EN 50575:2015 A1:2017 | ČSN EN 60754-1:2015 | ČSN EN 60754-2:2015 | IEC/ČSN EN 60332-1-2 | ČSN EN 60754-1:2015 | ČSN EN 60754-2:2015 | IEC/ČSN EN 61034-2	NSI/EIA/TIA 568A, 568B | ISO/IEC 11801 | ČSN EN 50173-1 ed. 4:2019 | IEC 60754-2 | ČSN EN 60754-1:2015 | ČSN EN 60754-2:2015 | ČSN EN 50575:2015 A1:2017 | IEC/ČSN EN 60332-1-2 | ČSN EN 60754-1:2015 | ČSN EN 60754-2:2015 | IEC/ČSN EN 61034-2 | ČSN EN 50288-1 ed. 3:2014
CPR CERTIFICATION					
Euroclass fire rating	B2ca-s1-d1-a1	Dca-s1-d2-a1	Eca	Dca-s2-d2-a2	Dca-s2-d2-a2
Hazardous substances	–	–	–	–	–

EMOS Coaxial cables



Order code		S5131 | S5231S	S5141 | S5241S	S5252 | S5253	S5261 | S5262 | S5268	S5265 | S5266	S5269 | S5270
Type of coaxial cable		CB 50F	CB 100F	CB 500	CB 113	CB 113 UV	CB 113 LSZH
Type		75Ω					
Class		–	–	–	CLASS A+	CLASS A+	CLASS A+
DESIGN PARAMETERS							
Internal conductor Ø [mm], mat.		0,9 Cu	1,0 Cu	0,75 Cu	1,13 Cu	1,13 Cu	1,13 Cu
Dielectric Ø [mm], type		4,4 FPE	4,6 FPE	3,2 FPE	4,8 FPE	4,8 FPE	4,8 FPE
Shielding	I.foil	1× Al	1× Al	1× Al/PES	1× Al/PES	1× Al/PES	1× Al/PES
	Conductors Ø [mm]	CuSn 32× 0,12	CuSn 48× 0,12	CuSn 48× 0,12	CuSn 144× 0,12	CuSn 144× 0,12	CuSn 144× 0,12
	II.foils	–	–	Al/PES spiral	Al/PES spiral	Al/PES spiral	Al/PES spiral
Jacket Ø [mm]		6,3±0,2	6,5±0,2	5±0,2	7,05±0,2	7,05±0,2	7,05±0,2
Material		PVC	PVC	PVC	PVC	PVC – UV resistant	LSZH
Colour		white	white	white	white	black	white
ELECTRICAL PARAMETERS							
Impedance [Ω]		75±3					
Capacity [pF/m]		56	54	53	52	52,5	52
Shortening coefficient		0,81	0,82	0,85	0,85	0,84	0,85
Maximum attenuation at 20 °C [dB/100 m]	10 MHz	2,2	2	4,5	2,2	2,28	2,2
	100 MHz	7	7	10,5	5,8	5,8	5,8
	450 MHz	14,3	14,1	20,2	12,5	12,6	12,5
	650 MHz	17,8	17,5	24,1	15,3	15,1	15,3
	860 MHz	20,8	20,5	28	18,5	17,87	18,5
	1 000 MHz	21,8	21	29,1	19,3	19,5	19,3
	2 000 MHz	32	31	>35	29,5	28,02	29,5
Maximum return loss at 20 °C [dB]	10–300 MHz	25	25	25	30	31	–
	300–600 MHz	23	23	20	25	25	25
	600–900 MHz	20	20	18	23	23	23
Min. shielding effectiveness [dB]	10–800 MHz	75	75	75	>95	>95	>95
Max. DC resistance at 20 °C [Ω/km]	Inner core	29,3	23,7	41,5	18,5	25,7	18,5
	Outer core	57,2	38,2	48,5	38,5	45,9	38,5
Insulation resistance between cores at 20 °C* [MΩ/km]		500	500	1 000	1 000	500	1 000
MECHANICAL PROPERTIES							
Weight [kg/km]		39,5	40,5	26,5	41,5	43,5	43,5
Min. bending radius single/multiple [mm]		30/60	30/60	25/50	35/70	30/60	35/70
Operating temperature [°C]	Operating	-20 ~ +75					
	During installation	+5 ~ +60					
Packaging method	Length [m]	100 | 250	100 | 250	100 | 250	100 | 250 | 500	100 | 250	250 | 500
	Reel type	paper	paper	paper	paper | wood	paper	paper | wood
	Metrage marking	yes					
RECOMMENDED CONNECTOR TYPES							
Order code	F screw-on	K7331	K7331	K7321	K7351	K7351	K7351

Coaxial cables



Order code		S5271 | S5273	S5272	S5194	S5385	S5381 | S5381E	S5382 | S5383	S5213
Type of coaxial cable		CB 21D	CB 115	RG59B/U	CB 125	CB 130	CB 135	RG58U
Type		75Ω						50Ω
Class		CLASS A	CLASS A	–	–	–	CLASS A	–
DESIGN PARAMETERS								
Internal conductor Ø [mm], mat.		1,10 Cu	1,02 Cu	0,58 Cu	1,02 Cu	1,02 CCS	1,02 CCS	17× 0,19 CCA
Dielectric Ø [mm], type		4,8 FPE	4,8 FPE	3,7 FPE	4,8 FPE	4,8 FPE	4,8 FPE	3 SPE
Shielding	I.foil	1× Al/PET	1× Al/PET	–	1× CCA/PES	1× Al/PES	1× Al/PES	–
	Conductors Ø [mm]	Al 128× 0,12	Al 96× 0,12	CCA 128× 0,12	CCA 64× 0,12	Al 32× 0,12	Al 64× 0,12	CCA 112× 0,12
	II.foils	–	Al/PET	–	–	–	Al/PES	–
Jacket Ø [mm]		6,8±0,2	6,8±0,2	6,05±0,2	6,8±0,2	6,8±0,2	6,8±0,2	5±0,2
Material		PVC	PVC	PVC	PVC	PVC	PVC	PVC
Colour		white	white	black	white	white	white	black
ELECTRICAL PARAMETERS								
Impedance [Ω]		75±3						50±3
Capacity [pF/m]		52	50	70	54	55	75	100
Shortening coefficient		0,85	0,81	0,66	0,83	0,84	0,85	0,66
Maximum attenuation at 20 °C [dB/100 m]	10 MHz	2,2	2,17	3	2,28	2,32	2,28	8,5
	100 MHz	4,2	7,35	9	7,1	7,4	7,2	14,2
	450 MHz	11,3	13,2	20	14,4	15,5	15	32,9
	650 MHz	14,8	17,42	28	17,6	18,2	18,3	47,2
	860 MHz	17,6	19,47	32	20,6	20,8	20,7	–
	1 000 MHz	18,4	19,8	–	21,3	22,5	21,9	–
	2 000 MHz	27,1	29,9	–	31,5	34	33,5	–
Maximum return loss at 20 °C [dB]	10–300 MHz	30	25	20	23	25	25	–
	300–600 MHz	25	23	16	20	23	23	18
	600–900 MHz	23	19	16	20	20	20	16
Min. shielding effectiveness [dB]	10–800 MHz	>110	>100	90	77	75	>110	65
Max. DC resistance at 20 °C [Ω/km]	Inner core	19,5	21	170	23,9	25,7	25,3	37,6
	Outer core	38,5	38	17	38,9	45,9	49,2	17,1
Insulation resistance between cores at 20 °C" [MΩ/km]		>500	500	>10 000	500	500	500	500
MECHANICAL PROPERTIES								
Weight [kg/km]		41,5	41	55	40,5	40,5	40,5	40,5
Min. bending radius single/multiple [mm]		35/70	30/60	25/50	30/60	30/60	30/60	25/50
Operating temperature [°C]	Operating	-20 ~ +75						
	During installation	+5 ~ +60						
Packaging method	Length [m]	100 | 500	100	500	100	100	100 | 500	500
	Reel type	paper | wood	paper	paper | wood	paper	paper | PVC	paper | wood	wood
	Metrage marking	yes						
RECOMMENDED CONNECTOR TYPES								
Order code	F screw-on	K7351	K7351	K7331	K7351	K7331	K7331	–

EMOS Antennas

City











Order code	J0686	J0687	J0688	J0701	J0702
Use	indoor	indoor	indoor	indoor	indoor
Signal reception	FM/DAB/DVB-T/T2	DAB/DVB-T/T2	DVB-T/T2	FM/DAB/DVB-T/T2	DVB-T/T2
Suitable for receiving full HD broadcasts	yes	yes	yes	yes	yes
LTE filter	yes	yes	yes	yes	yes
5G filter	yes	yes	yes	yes	yes
Polarization	horizontal and vertical	horizontal and vertical	horizontal and vertical	horizontal and vertical	horizontal and vertical
Frequency bands	FM/VHF/DAB/UHF	VHF/UHF	VHF/UHF	FM/VHF/DAB/UHF	UHF
Frequency range	87.5–230 MHz, 470–698 MHz	174–230 MHz, 470–698 MHz	174–230 MHz, 470–698 MHz	47–230 MHz, 470–698 MHz	470–698 MHz
Reception angle	360°	360°	360°	360°	180°
Power supply	DC USB 5 V/550 mA (included)	DC USB 5 V/550 mA (included)	DC USB 5 V/550 mA (included)	DC USB 5 V/550 mA (included)	DC USB 5 V/550 mA (included)
Connector type	IEC	IEC	IEC	IEC	IEC











Order code	J0703	J0704	J0705	J0707	J0708
Use	indoor	indoor	indoor	indoor	indoor
Signal reception	DAB/DVB-T/T2	FM/DAB/DVB-T/T2	FM/DAB/DVB-T/T2	DAB/DVB-T/T2	FM/DAB/DVB-T/T2
Suitable for receiving full HD broadcasts	yes	yes	yes	yes	yes
LTE filter	yes	yes	yes	yes	yes
5G filter	yes	yes	yes	yes	yes
Polarization	horizontal and vertical	horizontal and vertical	horizontal and vertical	horizontal and vertical	horizontal and vertical
Frequency bands	VHF/UHF	FM/VHF/DAB/UHF	FM/VHF/DAB/UHF	VHF/DAB/UHF	FM/VHF/DAB/UHF
Frequency range	174–230 MHz, 470–698 MHz	87.5–230 MHz, 470–698 MHz	87.5–230 MHz, 470–698 MHz	174–230 MHz, 470–698 MHz	87.5–230 MHz, 470–698 MHz
Reception angle	360°	360°	180°	360°	360°
Power supply	DC USB 5 V/550 mA (included)	DC USB 5 V/550 mA (included)	DC USB 5 V/550 mA (included)	DC USB 5 V/550 mA (included)	USB 5 V/200 mA (included)
Connector type	IEC	IEC	IEC	IEC	IEC








Order code	J0682	J0709	J0673	J0659	J0656
Use	indoor	indoor	indoor	indoor	indoor
Signal reception	FM/DAB/DVB-T/T2	DAB/DVB-T/T2	DAB/DVB-T/T2	DAB/DVB-T/T2	FM/DAB/DVB-T/T2
Suitable for receiving full HD broadcasts	yes	yes	yes	yes	yes
LTE filter	yes	yes	yes	yes	yes
5G filter	–	yes	–	–	–
Polarization	horizontal and vertical	horizontal and vertical	horizontal and vertical	horizontal	horizontal and vertical
Frequency bands	FM/VHF/DAB/UHF	VHF/UHF	VHF/UHF	VHF/UHF	FM/VHF/UHF
Frequency range	87.5–230 MHz, 470–790 MHz	174–230 MHz, 470–698 MHz	174–230 MHz, 470–790 MHz	174–230 MHz, 470–790 MHz	87.5–230 MHz, 470–790 MHz
Reception angle	360°	180°	180°	180°	360°
Power supply	DC USB 5 V/550 mA (included)	USB 5 V/200 mA (included)	DC USB 5 V/550 mA (included)	DC USB 5 V/550 mA (included)	DC USB 5 V/550 mA (included)
Connector type	IEC	IEC	IEC	IEC	IEC

EMOS

Antennas

Village










Order code	J0801	J0802	J0683	J0803	J0664
Use	universal	indoor/outdoor	indoor/outdoor	indoor/outdoor	outdoor universal
Signal reception	DVB-T/T2	FM/DAB/DVB-T/T2	FM/DAB/DVB-T/T2	FM/DAB/DVB-T/T2	FM/DAB/DVB-T/T2
Suitable for receiving full HD broadcasts	yes	yes	yes	yes	yes
LTE filter	yes	yes	yes	yes	yes
5G filter	yes	yes	–	yes	–
Polarization	horizontal and vertical	horizontal and vertical	horizontal and vertical	horizontal and vertical	horizontal and vertical
Frequency bands	UHF	FM/VHF/DAB/UHF	FM/VHF/DAB/UHF	FM/VHF/UHF	FM/VHF/UHF
Frequency range	470–698 MHz	87.5–230 MHz, 470–698 MHz	87.5–230 MHz, 470–790 MHz	47–698 MHz	47–790 MHz
Reception angle	90°	180°	180°	360°	360°
Power supply	DC USB 5 V/550 mA (included)	USB 5 V/200 mA (included)	DC USB 5 V/550 mA (included)	USB 5 V/200 mA (included)	DC USB 5 V/550 mA (included)
Connector type	F, IEC	IEC	IEC	IEC	F, IEC










Order code	J0804	J0685	J0681	J0667
Use	universal	indoor/outdoor	outdoor universal	outdoor
Signal reception	DAB/DVB-T/T2	DVB-T/T2	FM/DAB/DVB-T/T2	DVB-T/T2
Suitable for receiving full HD broadcasts	yes	yes	yes	yes
LTE filter	yes	yes	yes	yes
5G filter	yes	yes	–	–
Polarization	horizontal and vertical	horizontal and vertical	horizontal and vertical	horizontal and vertical
Frequency bands	VHF/DAB/UHF	UHF	FM/VHF/DAB/UHF	UHF
Frequency range	174–230 MHz, 470–698 MHz	470–698 MHz	87.5–230 MHz, 470–790 MHz	470–790 MHz
Reception angle	180°	30°/40°	38°/90°	30°/40°
Power supply	DC USB 5 V/550 mA (included)	DC USB 5 V/550 mA (included)	DC USB 5 V/550 mA (included)	DC 5–12 V/100 mA (included)
Connector type	F, IEC	F, IEC	F, IEC	F, IEC

EMOS Antennas

Profi









Order code	J0906	J0907	J0690	J0669
Use	outdoor YAGI	outdoor YAGI	outdoor	outdoor
Signal reception	DVB-T/T2	DVB-T/T2	DVB-T/T2	DVB-T/T2
Suitable for receiving full HD broadcasts	yes	yes	yes	yes
LTE filter	yes	yes	yes	yes
5G filter	yes	yes	yes	–
Polarization	horizontal and vertical	horizontal and vertical	horizontal and vertical	horizontal and vertical
Frequency bands	UHF	UHF	UHF	UHF
Frequency range	470–698 MHz	470–698 MHz	470–698 MHz	470–790 MHz
Reception angle	38°/80°	38°/80°	38°/80°	45°/40°
Power supply	not stated	not stated	passive	passive
Connector type	F connector	F connector	F connector	F connector






Order code	J0680	J5818	J0665	J0666
Use	outdoor	outdoor	set containing antenna, preamplifier and power supply	set containing antenna, preamplifier and power supply
Signal reception	DVB-T/T2	DAB/DVB-T/T2	DAB/DVB-T/T2	DAB/DVB-T/T2
Suitable for receiving full HD broadcasts	yes	yes	yes	yes
LTE filter	yes	–	yes	yes
5G filter	–	–	–	–
Polarization	horizontal and vertical	horizontal and vertical	horizontal and vertical	horizontal and vertical
Frequency bands	UHF	VHF/UHF	VHF/DAB/UHF	VHF/DAB/UHF
Frequency range	470–790 MHz	170–790 MHz	170–790 MHz	170–790 MHz
Reception angle	34°/26°	30°/40°	30°/40°	30°/40°
Power supply	passive	passive	12 V/100 mA (included)	12 V/100 mA (included)
Connector type	F connector	below screw	F connector	F connector

EMOS® Digital and clamp multimeters




Order code	M3620	M0305	M0230	M2092	M0391	M0320
Series	300		200			100
Type	MD-310	MD-310C	MD-230	MD-220	MD-210	MD-110
Range selection	manual	automatic	manual	manual	manual	manual
AC voltage	200 – 300 V	2 – 600 V	2 – 600 V	2 – 600 V	200 – 300 V	200 – 300 V
DC voltage	200 mV – 300 V	200 mV – 600 V	200 mV – 600 V	200 mV – 600 V	200 mV – 300 V	200 mV – 300 V
AC current	–	–	2 mA – 10 A	2 mA – 10 A	–	–
DC current	20 mA – 10 A	2 – 600 A	2 mA – 10 A	2 mA – 10 A	20 µA – 10 A	2 000 µA – 200 mA
Electrical resistance	200 Ω – 2 MΩ	200 Ω – 20 MΩ	200 Ω – 20 MΩ	200 Ω – 20 MΩ	200 Ω – 2 MΩ	200 Ω – 2 MΩ
Circuit continuity	yes	yes	yes	yes	yes	–
Diode test	yes	yes	yes	yes	yes	yes
Transistor test	–	–	yes	yes	–	–
Battery test	yes	–	–	–	–	yes
Temperature measurement	–	–	–	–	–	–
Touchless AC voltage detection	–	–	–	–	–	–
Product details	safe measuring tip connection technology	–	–	–	–	–



Order code	M3252	M0430	M0420	M3691	M0400
Series	500	400			
Type	MD-510	MD-430	MD-420	MD-410	MD-410C
Range selection	fully automatic + manual	automatic + manual	automatic	manual	automatic + manual
AC voltage	6 – 600 V	600 mV – 750 V	2 – 300 V	200 mV – 300 V	4 V – 600 V
DC voltage	6 – 600 V	600 mV – 1 000 V	200 µA – 10 A (to 1 000 A)	200 mV – 300 V	400 mV – 600 V
AC current	–	600 µA – 10 A	200 mV – 300 A	20 mA – 10 A	400 A
DC current	–	600 µA – 10 A	200 µA – 10 A (to 1 000 A)	20 mA – 10 A	400 A
Electrical resistance	600 Ω – 10 MΩ	600 Ohm – 60 MOhm	200 Ω – 20 MΩ	200 Ω – 20 MΩ	400 Ω – 40 MΩ
Circuit continuity	yes	yes	yes	yes	yes
Diode test	–	yes	yes	yes	yes
Transistor test	–	yes	yes	–	–
Battery test	–	–	–	yes	–
Temperature measurement	–	-40 °C to +300 °C	-20 °C to +1 000 °C	0 °C to +1 000 °C	-20 °C to +1 000 °C
Touchless AC voltage detection	yes	–	–	yes	–
Product details	automatic detection of measured quantity, pocket-sized	maximum value memory, measured value memory	–	safe measuring tip connection technology	–

EMOS

Voltage testers









Order code	M0071	M0012A	M0014A	M0003B	M0007A	M0048	M0018
Series	700	300		200		100	
Type	VT-710	VT-320	VT-310	VT-211	VT-150	VT-120	VT-110
AC voltage	6 – 690 V	12 – 690 V	110 – 400 V	6–400 V	70 – 1 000 V touchless	70 – 250 V touchless	70 – 250 V touchless
DC voltage	6 – 690 V	12 – 690 V	110 – 400 V	6–400 V		0 – 250 V touchless	0 – 250 V touchless
Indication	optical + acoustic	optical + acoustic	optical	optical	optical + acoustic	optical + acoustic	optical
Determination of polarity	yes	yes	yes	yes	–	yes	yes
Determination of phase sequence	yes	yes	yes	–	–	–	–
Circuit continuity	yes	yes	–	–	–	–	–

Measuring tools






Order code	M0501	M0502	M0503	N0322
Name	Multidetector	Laser distance meter	IR thermometer	Universal battery tester
Product details	detection of AC wiring, metal and wood	0,05 – 40 m, length, area, volume, Pythagoras, continuous measurement	optical characteristic 8:1, laser measurement, continuous measurement, memory, -50 °C to 380 °C	for batteries AAA, AA, C, D, 9 V, button

EMOS

Thermostats



Order code	P5611OT	P5616OT	P5606OT	P5603R	P5614
Thermostat type	wireless with OpenTherm communication	wireless with OpenTherm communication	wired with OpenTherm communication	wire	wireless
Control mode	heating and cooling system	heating and cooling system	heating and cooling system	heating and cooling system	heating and cooling system
Number of programs	6 programs + 3 customizable	1 customizable program and customizable temperature (6× per day)	1 customizable program and customizable temperature (6× per day)	customizable temperature	customizable temperature
Temperature setting type	6 temperature changes per day	6 temperature changes per day	6 temperature changes per day	manually	manually
Temperature setting	from 7 °C up to 30 °C, by 0.2 °C	from 5 °C up to 35 °C, by 0.5 °C	from 5 °C up to 35 °C, by 0.5 °C	from 5 °C up to 30 °C, by 1 °C	from 5 °C up to 35 °C, by 0.5 °C
Adjustable variance of temperature	0.1 °C, 0.2 °C, 0.5 °C, 1.0 °C	from 0.2 °C up to 2 °C, by 0.1 °C	from 0.2 °C up to 2 °C, by 0.1 °C	0,4 °C	±0.2 °C
ON/OFF function	yes	yes	yes	–	yes
Holiday mode	–	yes	yes	–	–
Switching	230 V AC and potential-free	230 V AC and potential-free	230 V AC and potential-free	230 V AC and potential-free	230 V AC and potential-free
Switching load	16 A resistive, 5 A inductive	10 A resistive, 4 A inductive	6 A resistive, 2 A inductive	6 A resistive, 2 A inductive	16 A resistive, 4 A inductive
Power supply	230 V AC (receiver)/2× 1.5 V AA (transmitter)	230 V AC (receiver)/2× 1.5 V AA (transmitter)	2× 1.5 V AA (included)	2× 1.5 V AA (included)	230 V AC (receiver)/2× 1.5 V AAA (transmitter)
Other features	OpenTherm & relay output, lock function, illuminated display, range 100 m	OpenTherm & relay output, lock function, illuminated display, range 100 m	OpenTherm & relay output, lock function, illuminated display	freeze protection	freeze protection, illuminated display, range 100 m



Order code	P5604	P5623	P5607	P5601UF	P5660FR
Thermostat type	wire	wireless	wire	wired for underfloor heating	socket
Control mode	heating and cooling system	heating system	heating and cooling system	heating system	heating and cooling system
Number of programs	customizable temperature	customizable	1 customizable program and customizable temperature (6× per day)	1 customizable program and customizable temperature (6× per day)	customizable temperature (6× per day)
Temperature setting type	manually	6 temperature changes per day	6 temperature changes per day	6 temperature changes per day	6 temperature changes per day
Temperature setting	from 5 °C up to 35 °C, by 0.5 °C	5 °C to 35 °C, resolution 0.5 °C	from 5 °C up to 35 °C, by 0.5 °C	from 5 °C up to 95 °C, by 0.5 °C	5 °C to 40 °C, resolution 0.5 °C
Adjustable variance of temperature	±0.2 °C	±0,3 °C	from 0.2 °C up to 2 °C, by 0.1 °C	from 1 °C up to 10 °C, by 1 °C	from 0.2 °C up to 2 °C, by 0.1 °C
ON/OFF function	–	yes	–	yes	yes
Holiday mode	–	yes	–	–	–
Switching	230 V AC and potential-free	230 V AC and potential-free	230 V AC and potential-free	voltage 230 V AC, 50 Hz	230 V AC and potential-free
Switching load	8 A resistively, 2 A inductively	16 A resistive, 4 A inductive	8 A resistively, 2 A inductively	16 A resistive	16 A resistive, 4 A inductive
Power supply	2× 1.5 V AAA (included)	230 V AC (receiver)/ 5 V (transmitter)	2× 1.5 V AAA (included)	230 V AC	230 V AC
Other features	freeze protection, illuminated display	control via mobile app, Wi-Fi connection; master lock; freeze protection, range 100 m	freeze protection, illuminated display	freeze protection	freeze protection, temperature calibration, timer (countdown, summer/winter time)

Thermostats






Order code	P56201	P56211	P56201UF	P5630S
Thermostat type	wire	wireless	wired for underfloor heating	SMART, programmable thermo knob
Control mode	heating and cooling system	heating and cooling system	heating system	heating system
Number of programs	customizable temperature (6× per day)	customizable temperature (6× per day)	customizable temperature (6× per day)	1 customizable program and customizable temperature (6× per day)
Temperature setting type	6 temperature changes per day	6 temperature changes per day	6 temperature changes per day	6 temperature changes per day
Temperature setting	from 5 °C up to 35 °C, by 0.5 °C	from 5 °C up to 35 °C, by 0.5 °C	from 1 °C up to 70 °C, by 0.5 °C	1 °C to 70 °C, resolution 0.5 °C
Adjustable variance of temperature	0.2 °C to 2 °C (resolution 0.1 °C)	0.2 °C to 2 °C (resolution 0.1 °C)	internal sensor: 0.5 °C to 2.5 °C, resolution 0.5 °C; underfloor sensor: 1 °C to 9 °C, resolution 1 °C	from 0.5 °C up to 1.5 °C, by 0.5 °C
ON/OFF function	yes	yes	yes	–
Holiday mode	yes	yes	yes	yes
Switching	voltage 230 V AC, 50 Hz	230 V AC and potential-free	voltage 230 V AC, 50 Hz	–
Switching load	6 A resistive, 2 A inductive	16 A resistive, 4 A inductive	16 A resistive	–
Power supply	230 V AC	230 V AC (receiver)/5 V (transmitter)	230 V AC	2× 1.5 V AA (included)
Other features	freeze protection, temperature calibration, switching based on GPS location	freeze protection, temperature calibration, switching based on GPS location	freeze protection, temperature calibration, switching based on GPS location	freeze protection, temperature calibration, child lock, switching based on GPS location
Matrix	–	–	–	M30 × 1.5 mm
Included adaptors	–	–	–	Danfoss RA, RAV, RAVL








Order code	P5685	P5686	P5683	P5684	P5681	P5682
Thermostat type	wire, flow thermostat	wire, flow thermostat	wire, flow thermostat	wire, capillary sensor thermostat	wire, flow thermostat	wire, capillary sensor thermostat
Control mode	heating and cooling system	heating and cooling system	heating and cooling system	heating and cooling system	heating and cooling system	heating and cooling system
Number of programs	–	–	–	–	–	–
Temperature setting type	manually	manually	manually	manually	manually	manually
Temperature setting	0 °C to 90 °C, resolution 5 °C	from 5 °C up to 80 °C, by 0.1 °C	from 5 °C up to 80 °C, by 0.1 °C	from 5 °C up to 90 °C, by 0.1 °C	0 °C to 90 °C, resolution 5 °C	0 °C to 90 °C, resolution 5 °C
Adjustable variance of temperature	–	from 0.1 °C up to 15 °C, by 0.1 °C	from 0.1 °C up to 15 °C, by 0.1 °C	from 0.1 °C up to 15 °C, by 0.1 °C	–	–
ON/OFF function	–	yes	yes	yes	–	–
Holiday mode	–	–	–	–	–	–
Switching	voltage 230 V AC, 50 Hz	voltage 230 V AC, 50 Hz	voltage 230 V AC, 50 Hz	voltage 230 V AC, 50 Hz	voltage 230 V AC, 50 Hz	voltage 230 V AC, 50 Hz
Switching load	16 A resistive, 4 A inductive	5 A resistively, 1.5 A inductively	5 A resistively, 1.5 A inductively	5 A resistively, 1.5 A inductively	16 A resistive, 4 A inductive	16 A resistive, 4 A inductive
Power supply	230 V, 400 V AC	230 V AC	230 V AC	230 V AC	230 V, 400 V AC	230 V, 400 V AC
Other features	–	–	display with set/current temperature, LED indication of thermostat activation, ON/OFF function	display with set/current temperature, LED indication of thermostat activation, ON/OFF function	–	–

EMOS®

Gas and smoke detectors









Order code	P56402	P56501	P56500	P56450
Detection: carbon monoxide	yes	–	–	–
Detection: smoke	–	yes	yes	–
Detection: flammable gases	–	–	–	yes
Optical indication	yes	yes	yes	yes
Audio indication	yes	yes	yes	yes
Wall-mounted and free-standing	yes	yes	yes	yes
Mutual pairing of detectors	–	–	yes	–
Central heating boilers	yes	yes	yes	yes
Cooker, water heater	yes	yes	yes	yes
Tankless water heater	yes	–	–	yes
Storage tank water heater	yes	–	–	yes
Garage (exhaust gases)	yes	–	–	–
Fireplace	yes	yes	yes	–
Power supply	2× 1,5 V AA	1× 9 V	2× 1,5 V AA	from 230 V AC mains
Detector life	10 years	10 years	10 years	5 years

Explanatory notes and useful links

Children‘s safety plugs

This icon in the catalogue refers to the presence of children’s safety plugs in outlets of extension cords or surge protections.



E-shop for Business Partners

We have an e-shop for business partners at **https://en.b2b.emos.cz**.
Take advantage of the benefits of online purchasing of our products anywhere you need.

Manuals for Goods

https://www.emos.eu/download
Here you can find all manuals for goods we have available, even for items no longer on offer.
Manuals can also be downloaded from the product details.



Photometric data

https://www.emos.eu/download
Here you can find photometric data for processing lighting projects using software tools such as DIALUX or RELUX.



A/ B/ C/ D

Packaging

A – retail packaging
B – number of products in a group packaging
C – number of products per inner carton
D – number of products per export carton

Misprints reserved. Illustrative images can be used. Package modification reserved.



















Making
Life
Easy

EMOS spol. s r.o.
Lipnicka 2844
750 02 Prerov
Czech Republic

e-mail: emos@emos.cz
phone: +420 581 261 111

www.emos.eu

Y11099

8 592920 136270